

SR1 and Trap Shooters Road Interchange Recommendations Report



Prepared for:



Prepared by:



August 2023

SR1 and Trap Shooters Road Interchange

Table of Contents

- Executive Summary..... 1
- Introduction 3
- Study Location and Study Area 3
- Purpose and Need..... 3
- Existing Conditions – Environmental Assessment 4
- Existing Conditions – Corridor Capacity Preservation Program..... 7
- Existing Conditions – Traffic..... 7
 - Existing Traffic Volumes..... 8
 - Traffic Operational Analysis..... 10
- Existing Conditions – Safety 12
 - Barkers Landing Road 12
 - Trap Shooters Road..... 14
 - Southbound SR1..... 14
 - Northbound SR1..... 16
 - Crash Rates..... 17
- Public Involvement 21
- Alternatives Considered..... 23
- Alternatives Evaluation 25
 - Future Traffic Volumes..... 25
 - Ramp Analysis 27
 - Travel Time Analysis..... 28
 - Safety Improvement / Crash Reduction Benefit..... 28
- Cost Estimates..... 30
- Final Recommendations 30
- Appendix A: Environmental Assessment Maps 31
- Appendix B: Demographics Reports 47
- Appendix C: Traffic Analysis..... 54
- Appendix D: Public Workshop Summaries..... 82
- Appendix E: Preferred Alternatives 205
- Appendix F: Cost Estimates..... 217



SR1 and Trap Shooters Road Interchange

List of Figures

Figure 1 - Study Area.....	3
Figure 2 - Natural Wetlands Inventory	4
Figure 3 - Historic and Archaeological Resources.....	5
Figure 4 - Delaware National Estuarine Research Reserve (DNERR) Saint Jones Reserve.....	6
Figure 5 - Corridor Capacity Preservation Program Manual.....	7
Figure 6 - 2022 Non-Summer Peak Hour Turning Movement Traffic Volumes.....	8
Figure 7 - 2022 Summer Saturday Peak Hour Turning Movement Traffic Volumes.....	9
Figure 8 - Crash Map.....	13
Figure 9 - Trap Shooters Road Annual Crashes.....	14
Figure 10 - Southbound SR1 Annual Crashes.....	15
Figure 11 - Northbound SR1 Annual Crashes.....	16
Figure 12 - Alternatives Overview.....	23
Figure 13 - 2028 Non-Summer Peak Hour Turning Movement Traffic Volumes.....	25
Figure 14- 2050 Non-Summer Peak Hour Turning Movement Traffic Volumes.....	25
Figure 15 - 2028 Summer Saturday Peak Hour Turning Movement Traffic Volumes.....	26
Figure 16 - 2050 Summer Saturday Peak Hour Turning Movement Traffic Volumes.....	26

List of Tables

Table 1 - LOS Criteria.....	10
Table 2 - Barkers Landing at Trap Shooters Road MOE	10
Table 3 - SB SR1 at Trap Shooters Road MOE.....	11
Table 4 - SB SR1 at Trap Shooters Road MOE.....	11
Table 5 - Trap Shooters Road Crash Type and Severity	14
Table 6 - Southbound SR1 Crash Type and Severity	14
Table 7 - Northbound SR1 Crash Type and Severity	16
Table 8 - 2018 Study Roadways Crash Rate	17
Table 9 - 2019 Study Roadways Crash Rate	18
Table 10 - 2020 Study Roadways Crash Rate	18
Table 11 - 2021 Study Roadways Crash Rate.....	18
Table 12 - 2018 Study Roadways Crash Rates Ratio to County and State Rates	19
Table 13 - 2019 Study Roadways Crash Rates Ratio to County and State Rates	19
Table 14 - 2020 Study Roadways Crash Rates Ratio to County and State Rates	20
Table 15 - 2021 Study Roadways Crash Rates Ratio to County and State Rates	20
Table 16 - Northbound SR1 Freeway Facilities LOS for Future Conditions.....	27
Table 17 - Southbound SR1 Freeway Facilities LOS for Future Conditions.....	27
Table 18 - Travel Time Change with Ponderosa Drive Origin-Destination	28
Table 19 - Travel Time Change with Town of Magnolia Origin-Destination.....	28
Table 20 - Project Estimated Annual Safety Improvement / Crash Reduction Benefit	29
Table 21 - Alternatives Comparison - Physical Measures of Effectiveness.....	29

SR1 and Trap Shooters Road Interchange

Executive Summary

The Dover Kent County MPO, in conjunction with the project sponsor, DelDOT, initiated a detailed study to evaluate options to improve safety at the intersection of Trap Shooters Road and SR1. This intersection provides a critical connection between the developing area around the Town of Magnolia and SR1, a major north south Expressway. As the area around the town of Magnolia continues to develop, there are increasingly more cars using Trap Shooters Road to access SR1. Over the years, as more traffic utilized the ramp connections, the safety of the ramp interfaces began to degrade.

The purpose and need for the project are directly related to the safety and capacity of SR1 at this interchange location. The purpose of the project is to improve the safety and capacity of the SR1 and Trap Shooters Road interchange. This project is needed based on the disproportionately high crash rates and the impacts on the roadway capacity caused by the existing interchange configuration.

The study evaluated the existing environmental constraints as well as the existing traffic operations to determine what improvements might be considered to accomplish the purpose and need for the project. Although there are a lot of natural resources in the area, most would not be impacted by the alternatives developed. This information was presented at the first public workshop on January 23, 2023, where the public was encouraged to provide additional information about their experiences navigating the intersection. The overwhelming conclusion from the meeting was that something needs to be done.

Four alternatives were developed to satisfy the overall purpose and need for the project.

Alternative 1 – Relocation of existing ramps filling impacted wetlands - This alternative shifts the SB SR1 offramps to the south and increases the exit ramp radius. The NB SR1 Access ramps would be relocated approximately ¼ of a mile to the south to allow for interstate standard deceleration lanes and acceleration lanes to be developed along SR1 prior to entering onto the Barkers Landing Bridge. The extension of Trap Shooters Road south, parallel to existing SR1, would require the crossing of a small area of identified wetlands. This alternative contemplates filling of the wetlands and mitigation of those impacts in an area adjacent to the project.

Alternative 2 - Relocation of existing ramps with bridge over impacted wetlands - This alternative is the same as Alternative 1 except that it spans the wetland impacts with a bridge.

Alternative 3 – New alignment from Barkers Landing Road to SR1 with new diamond interchange - This alternative creates a new ramp alignment from Barkers Landing Road to SR1. The new connection with SR1 allows for a more efficient interchange design with SR1. Alternative 3 considers using a diamond interchange that allows for traffic to easily access both NB and SB SR1.

The diamond interchange ramps are designed to meet all state and federal design standards for interstate interchanges. Alternative 3 impacts several agricultural areas west of SR1 including 2 pivot irrigation systems.

SR1 and Trap Shooters Road Interchange

Alternative 4 - New alignment from Barkers Landing Road to SR1 with new trumpet interchange – This alternative is the same as Alternative 3 except it replaces the diamond interchange with the trumpet interchange. The impacts between Alternative 3 and Alternative 4 are very similar.

These alternatives were evaluated using defined Measures of Effectiveness (MOE). These considered overall capacity improvements, improved safety, travel time comparison and a physical impact to environmental and other features. The results of the analysis showed similar improvements for both capacity and safety. This resulted from each alternative utilizing the AASHTO interstate standards for ramp configuration and lengths. Each ramp interface with SR1 will also be illuminated with roadway lighting. The impacts to the physical environment differed greatly between Alternatives 1 and 2 and Alternatives 3 and 4. Below is a chart of the physical impacts associated with each of the 4 alternatives.

SR1 Trap Shooters Road Interchange Study									
Measures of Effectiveness - Physical Impacts									
Measure	UOM	Move SR1 Access Points South No Bridge		Move SR1 Access Points South With Bridge		Alternate 3 New Spur Road to SR1 with Diamond Interchnage		Alternate 4 New Spur Road to SR1 with Trumpet Interchnage	
		Wetland Impacts Permanent	Square Feet / Ac	10,155	0.23	786	0.02	0	0.00
Wetland Impacts Temp	Square Feet / Ac	0	0.00	6,621	0.15	0	0.00	0	0.00
Forested Land Impacts	Square Feet / Ac	278,036	6.38	287,930	6.61	357,621	8.21	326,427	7.49
Agricultural Land Impacts	Square Feet / Ac	164,408	3.77	164,408	3.77	549,855	12.62	558,526	12.82
Ag. Land Preservation Impacts	Square Feet / Ac	0	0.00	0	0.00	5,294	0.12	5,294	0.12
Irrigation Impacts	Square Feet / Ac	10,482	0.24	10,482	0.24	123,248	2.83	123,248	2.83
Right-of-way Area	Square Feet / Ac	519,455	11.93	553,971	12.72	919,292	21.10	969,772	22.26
Costs	Thousands Dollars	\$17,500,000		\$25,250,000		\$34,500,000		\$31,700,000	

The results indicate that option 1 provides the overall best value with improved operations and safety, and minimal impacts to the natural environment.

Community involvement on this project consisted of two community meetings with online surveys. The second public workshop provided the public an opportunity to review and comment on the four alternatives presented in this report. Public opinion was split between Alternative 1 and Alternative 3. Additional comments were received from a farm owner who expressed concerns with the agricultural impacts associated with Alternative 3 and Alternative 4.

This report summarizes all the information gathered and assessed during the study. Based on the MOE analysis, Alternative 1 provides the best value for this project, however there is a concern that the environmental agencies will require that the wetland impacts be minimized resulting in the need to consider Alternative 2. It is recommended that both Alternative 1 and Alternative 2 be advanced to DelDOT for further development, design, permitting, and construction.

SR1 and Trap Shooters Road Interchange

Introduction

The intersection of Trap Shooters Road and SR1 provides a critical connection between the developing area around the Town of Magnolia and SR1, a major north south Expressway. As the area around the Town continues to develop, there are increasingly more cars using Trap Shooters Road to access SR1. Over the years, more traffic utilizing the ramp connections have led to the safety of the ramp interfaces degrading. To address the increasing safety concerns, the ramp connections from Trap Shooters Road were reconfigured about 15 years ago to eliminate the NB yield and merge and replace it with a stop condition with no NB acceleration lane. The SB on ramp was modified from a short taper merge to a parallel ramp configuration. These changes were made to address increasing crash rates and safety concerns. Initially, the ramp configurations helped address safety concerns, however the existing configurations make it difficult for the local traffic waiting to access SR1 to merge in with existing SR1 traffic. This situation continues to worsen as traffic volumes on SR1 increase and the available gaps to merge into existing traffic continue to decrease. In addition, the speeds on SR1 have been increasing over the years making it difficult to accelerate from a stop condition to highway speeds within the existing gaps in traffic. This study was initiated by DeDOT to evaluate possible alternatives to improve the ramp configurations from Trap Shooters Road and SR1 to meet current Federal and State standards.

Study Location and Study Area

The intersection of Trap Shooters Road and SR1 is located just south of Barkers Landing Bridge in Central Kent County. Trap Shooters Road connects Barkers Landing Road and Ponderosa Drive to SR1 providing the developing areas around the town of Magnolia with access to SR1. The study area includes areas beyond the actual intersection and are shown in **Figure 1**. The study area is comprised mostly of agricultural lands to the east and south. The Saint Jones River and the surrounding flood plain is located to the north. Additional flood plain areas for the Saint Jones River are located to the west of the current interchange.



Figure 1 - Study Area

Purpose and Need

The purpose and need for the project are directly related to the safety and capacity of SR1 at this interchange location.

SR1 and Trap Shooters Road Interchange

The purpose of the project is to improve the safety and capacity of the SR1 and Trap Shooters Road interchange. This project is needed based on the disproportionately high crash rates and the impacts on the roadway capacity caused by the existing interchange configuration.

Existing Conditions – Environmental Assessment

The proposed project limits are located on two private parcels and public right-of-way. A desktop analysis was performed to assess any environmental constraints that would influence any alternatives development.

Federal Waters of the United States and State of Delaware Wetlands and Subaqueous Lands are likely located within project limits. The resources are likely to be both tidal and non-tidal. Any work resulting from temporary or permanent impacts to Waters of the U.S. and/or State of Delaware would undergo permitting to review the project impacts. Impacts resulting from the loss of aquatic resources in excess of 0.10-acre of wetlands and/or 0.03-acre of stream channel would require compensatory mitigation from the USACE. Additionally, any loss of State of Delaware Wetlands and/or Subaqueous Lands may require compensatory mitigation or in-lieu-fee. Compensatory mitigation is often restoration, creation, enhancement, or preservation of wetlands and waters to meet the policy of no net loss of aquatic

resources. In-lieu-fee is similar, but instead of permittee responsible mitigation, a sum is paid to government or non-profit organizations with competence in natural resource management.

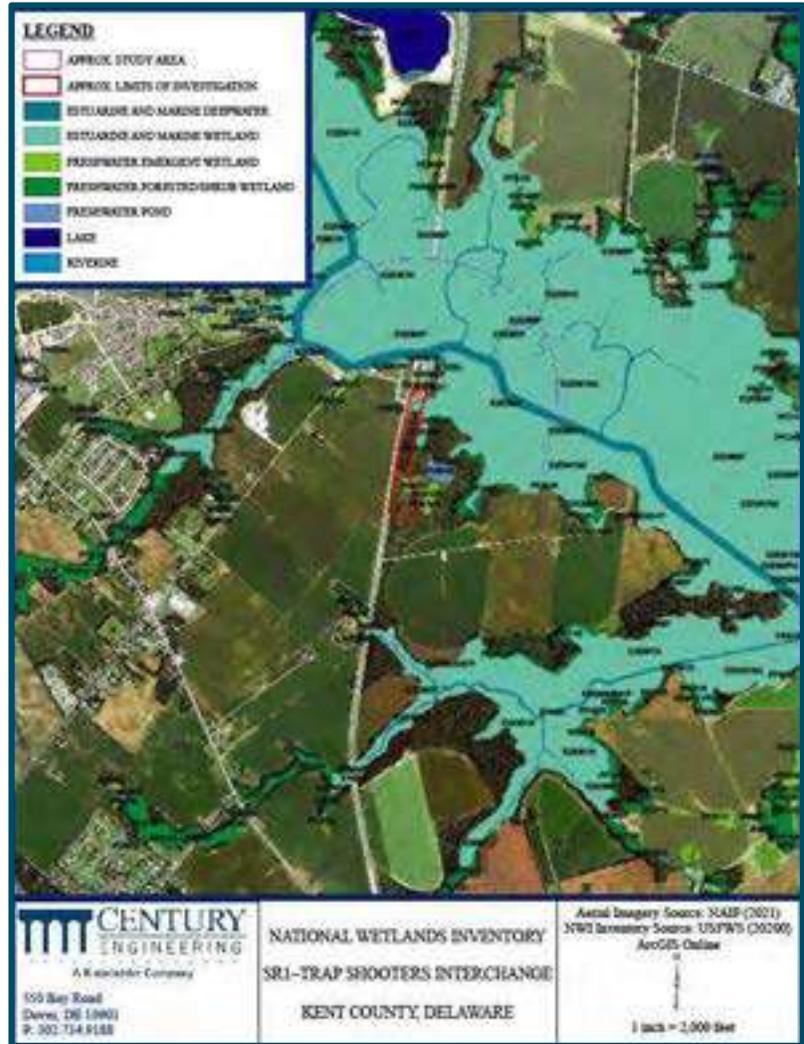


Figure 2 - Natural Wetlands Inventory

SR1 and Trap Shooters Road Interchange

within the project limits. **Figure 4** illustrates the limits of the Delaware National Estuarine Research Reserve (DNERR) Saint Jones Reserve.

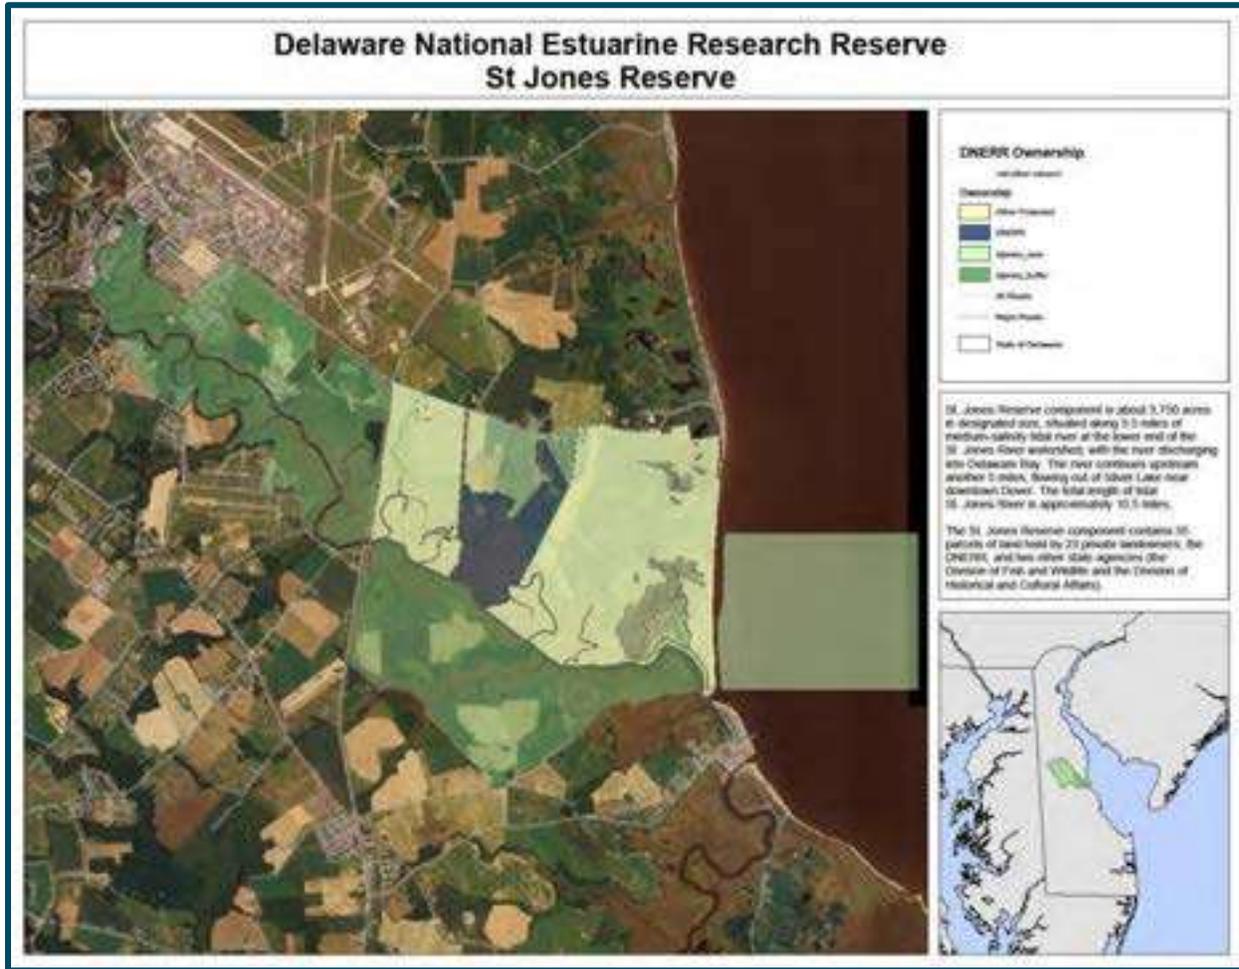


Figure 4 - Delaware National Estuarine Research Reserve (DNERR) Saint Jones Reserve

Public wells are indicated within the vicinity of the proposed project. Consultation with agencies during the permitting phase will ensure that the wells will not be impacted. No well head protection areas, underground storage tanks, brownfields, hazmat, or biosolids facilities were indicated within the study limits.

The environmental justice report for the project limits yielded no results, as the project limits are too small for reporting. The environmental justice report for a 1-mile screen from the project limits provides information on the demographics in the project area and is included in **Appendix B**.

SR1 and Trap Shooters Road Interchange

Existing Conditions – Corridor Capacity Preservation Program

The project is located within the limits of SR1 that are governed by the Corridor Capacity Preservation Program (CCPP). The program has had a plan in place for SR1 since the initial pilot program started in 1991. DeIDOT developed the program to preserve existing capacity of critical corridors throughout the state. SR1 was selected for this program because it serves as the main north-south highway to access the Delaware Beach resort areas. In addition to the resort traffic, eastern Sussex County has been experiencing a high rate of growth in year-round residential traffic and supporting commercial development. This has led to increased congestion and safety issues due to increased travel demand and the mixing of local and through traffic. The need for corridor capacity preservation on this section of SR1 is clearly demonstrated in the high volumes of existing and proposed traffic.

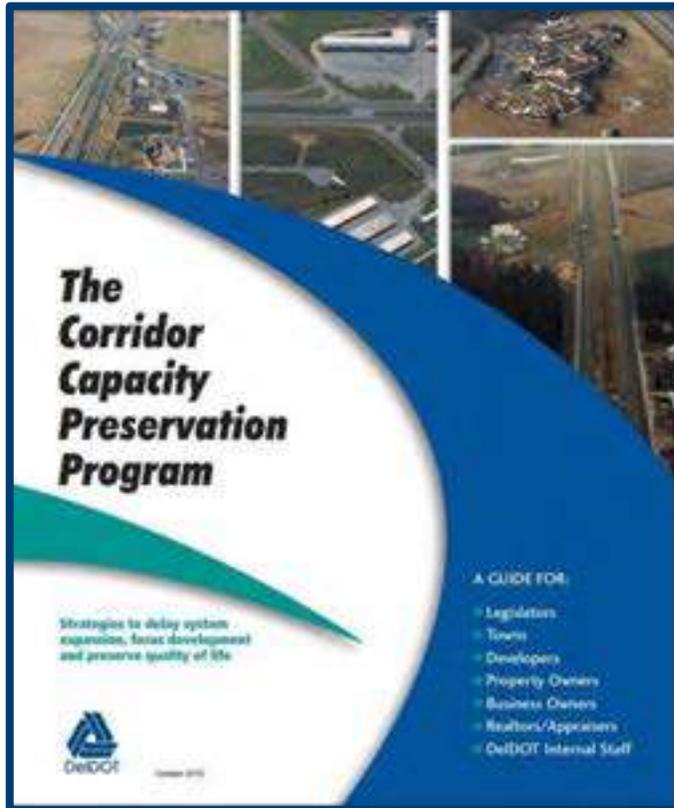


Figure 5 - Corridor Capacity Preservation Program Manual

Plans to improve this area of Trap Shooters Road and SR1 have been included in the SR1 Plan since its inception. These ideas have been tweaked and refined in subsequent updates in 2007 and 2023.

Existing Conditions – Traffic

The Trap Shooters Road ramps to SR1 are limited by the St. Jones River bridge and topography of the land adjacent to the highway. SR1 has a posted speed of 55 MPH within the project limits. No acceleration lane exists for the northbound entrance ramp due to this limitation, therefore vehicles from Trap Shooters Road enter from a complete stop condition. During high northbound SR1 (NB SR1) traffic volume periods, these entering vehicles must wait for unacceptably long durations for rare gaps in the NB SR1 traffic stream that are adequate to allow for acceleration to the highway speed to avert crashes. These conditions create a high probability for potentially dangerous operating conditions. The existing conditions traffic study has proposed to evaluate the feasibility of moving the existing NB SR1 entrance and exit ramps further south in order to accommodate an acceleration lane for the entrance ramp and a compliant deceleration lane for the exit ramp.

SR1 and Trap Shooters Road Interchange

Existing Traffic Volumes

Intersections within the study limits are as follows:

1. Barkers Landing Road at Trap Shooters Road
2. Southbound SR1 (SB SR1) at Trap Shooters Road
3. NB SR1 at Trap Shooters Road.

A combination of turning movement counts performed in October and November of 2022, and traffic data for the same periods from existing Wavetronix devices along SR1 located north and south of the intersections were used to obtain the turning movement volumes for non-summer/regular weekday A.M., midday, P.M. and Saturday peak hour turning movement volumes presented in **Figure 6** Traffic data for the summer Saturday peak hours presented in **Figure 7** were obtained from the Wavetronix devices. A separate count of trucks / heavy vehicles was also collected for all the various peak hours for the traffic operational analysis.

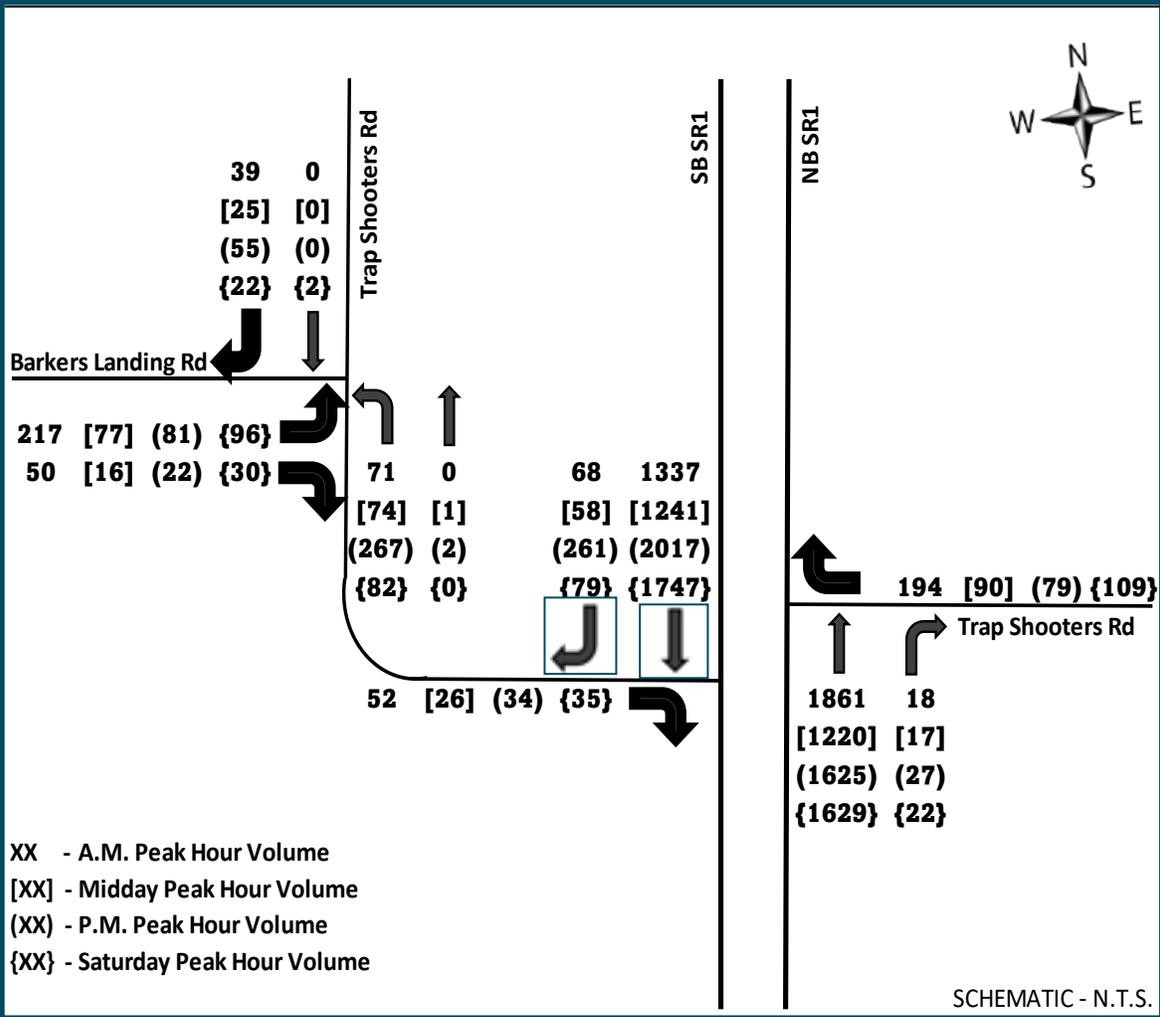


Figure 6 - 2022 Non-Summer Peak Hour Turning Movement Traffic Volumes

SR1 and Trap Shooters Road Interchange

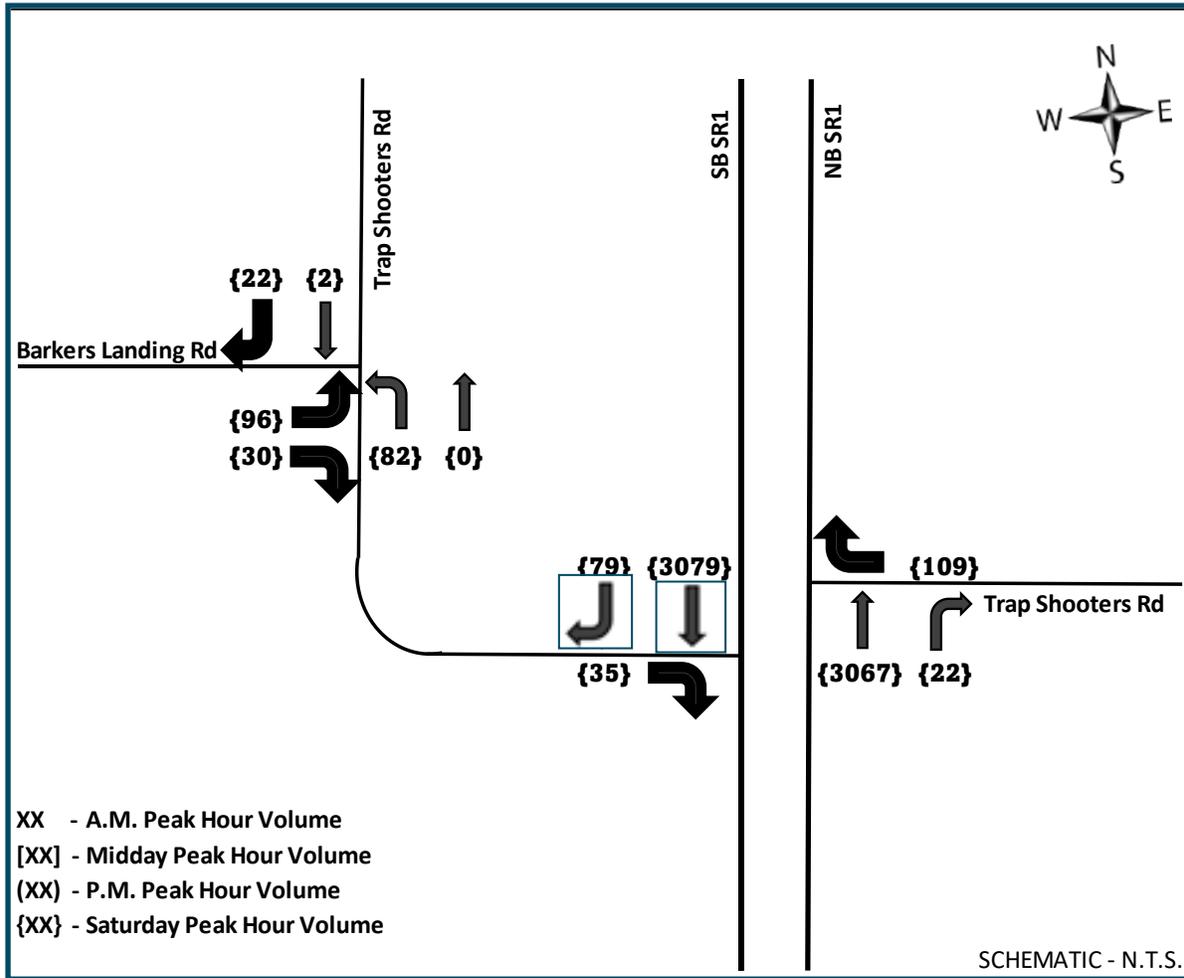


Figure 7 - 2022 Summer Saturday Peak Hour Turning Movement Traffic Volumes

SR1 and Trap Shooters Road Interchange

Traffic Operational Analysis

The intersection of NB SR1 at Trap Shooters Road is comprised of an exit and entrance ramp on a limited access facility, however, due to the stop-controlled condition and absence of an acceleration lane for the entrance ramp, the intersection essentially operates as a stop-controlled T-intersection. It was therefore analyzed as two-way stop controlled (TWSC) intersection. While the entrance ramp for SB SR1 has an acceleration lane, the entering traffic is controlled by a yield sign, making the eastbound movement operate like a channelized right-turn at a controlled intersection. The intersection of SB SR1 at Trap Shooters Road was therefore analyzed as such.

HCS Software Version 2022, which utilizes the methodologies of the current Highway Capacity Manual (HCM) Version 7, was used for the traffic operational analysis for the three intersections within the project limits. The measures of effectiveness presented from the analysis are average control delay measured in seconds per vehicle, Level of service (LOS) and 95th percentile queues in feet. Per the HCM methodology, for TWSC intersections, no measures of effectiveness are provided for the free movements and approaches, and an overall intersection LOS is not defined either. The LOS criteria for unsignalized analysis are presented in **Table 1**. As provided in the table, LOS F is defined by delay greater than 80 seconds per vehicle and/or volume-to-capacity ratio (V/C) greater than one (1), irrespective of control delay value. The operational analysis results for the three study intersections are presented in **Table 2, Table 3, and Table 4**.

Table 1 - LOS Criteria

Control Delay (Seconds per Vehicle)	LOS by V/C Ratio	
	V/C ≤ 1.0	V/C > 1.0
0 to 10	A	F
>10 to 15	B	F
>15 to 25	C	F
>25 to 35	D	F
>35 to 50	E	F
>50	F	F

Table 2 - Barkers Landing at Trap Shooters Road MOE

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	NBL Trap Shooters Rd	7.5	A	5	7.5	A	5	7.9	A	18	7.4	A	5	7.4	A	5
	EB L/R Barkers Landing Rd	11.9	B	40	10.3	B	13	16.5	C	28	10.5	B	18	10.5	B	18

SR1 and Trap Shooters Road Interchange

Table 3 - SB SR1 at Trap Shooters Road MOE

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	EBR Trap Shooters Rd	17.4	C	15	16.4	C	8	27.6	D	15	21.5	C	13	93.5	F	53

Table 4 - SB SR1 at Trap Shooters Road MOE

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	WBR Trap Shooters Rd	87.6	F	198	16.9	C	23	27.1	D	38	35.6	E	70	301.4	F	213

As provided in Table 2, per the analysis, under current traffic and geometric conditions, Trap Shooters Road northbound left-turn movement and the stop-controlled Barkers Landing Road eastbound movements / approach operates at satisfactory LOS C or better for all non-summer and summer Saturday peak hours analyzed. The highest control delay of 16.5 seconds per vehicle is experienced by the Barkers Landing Road eastbound approach during the non-summer weekday P.M. peak hour.

Per the analysis, under current traffic and geometric conditions, at the intersection of SB SR1 and Trap Shooters Road, the eastbound yield controlled right-turn movement operates at satisfactory LOS D or better for all the non-summer peak hour periods analyzed with the worst delay of 27.1 seconds per vehicle experienced during the weekday P.M. peak hour as given in **Table 3**. Under existing summer traffic conditions, the Trap Shooter's Road eastbound right-turn movement operates at LOS F with average control delay of 93.5 seconds per vehicle.

As shown in **Table 4**, under current traffic and geometric conditions, per the analysis, Trap Shooters Road westbound movement / approach operates at satisfactory LOS C with 16.9 seconds average control delay, and LOS D with 27.1 seconds average control delay respectively for the non-summer midday and P.M. peak hours. The Trap Shooters Road westbound movement / approach operates at unsatisfactory LOS E with 35.6 seconds average control delay for the non-summer Saturday peak hour. For the non-summer A.M. peak hour, the Trap Shooters Road westbound movement / approach operates at LOS F with 87.6 seconds average control average control delay. During the summer Saturday peak hour, the Trap Shooters Road westbound movement / approach operates at LOS F with 301.4 seconds average control delay. That is an average control delay of more than 5 minutes per vehicle.

While current 95th percentile queues do not appear to be bad per the analysis for current conditions, these queues will get worse and become a problem as developments in the Magnolia area continue to grow with their associated increase in traffic volumes. The already unacceptable control delays will deteriorate further and will be exacerbated by this continued growth in developments if no improvements are implemented.

SR1 and Trap Shooters Road Interchange

Existing Conditions – Safety


Five-year crash data from October 21, 2017, to October 31, 2022, for NB SR1, SB SR1, Trap Shooters Road and Barkers Landing Road within the project limits was obtained from DelDOT Traffic Safety Section for Evaluation. All reported crashes that occurred on the specified roadways and their intersections were mapped. The approximate crash locations, number, type and severity of crashes are presented **Figure 8**. The full crash analysis can be found in **Appendix C**.

Barkers Landing Road

A total of two (2) crashes were reported as having occurred on Barkers Landing Road for the 5-year period. Both crashes involved property damage only. One crash was a front-to-rear collision and the other was a vehicle collision with deer in the road.

SR1 and Trap Shooters Road Interchange

Figure 8 - Crash Map

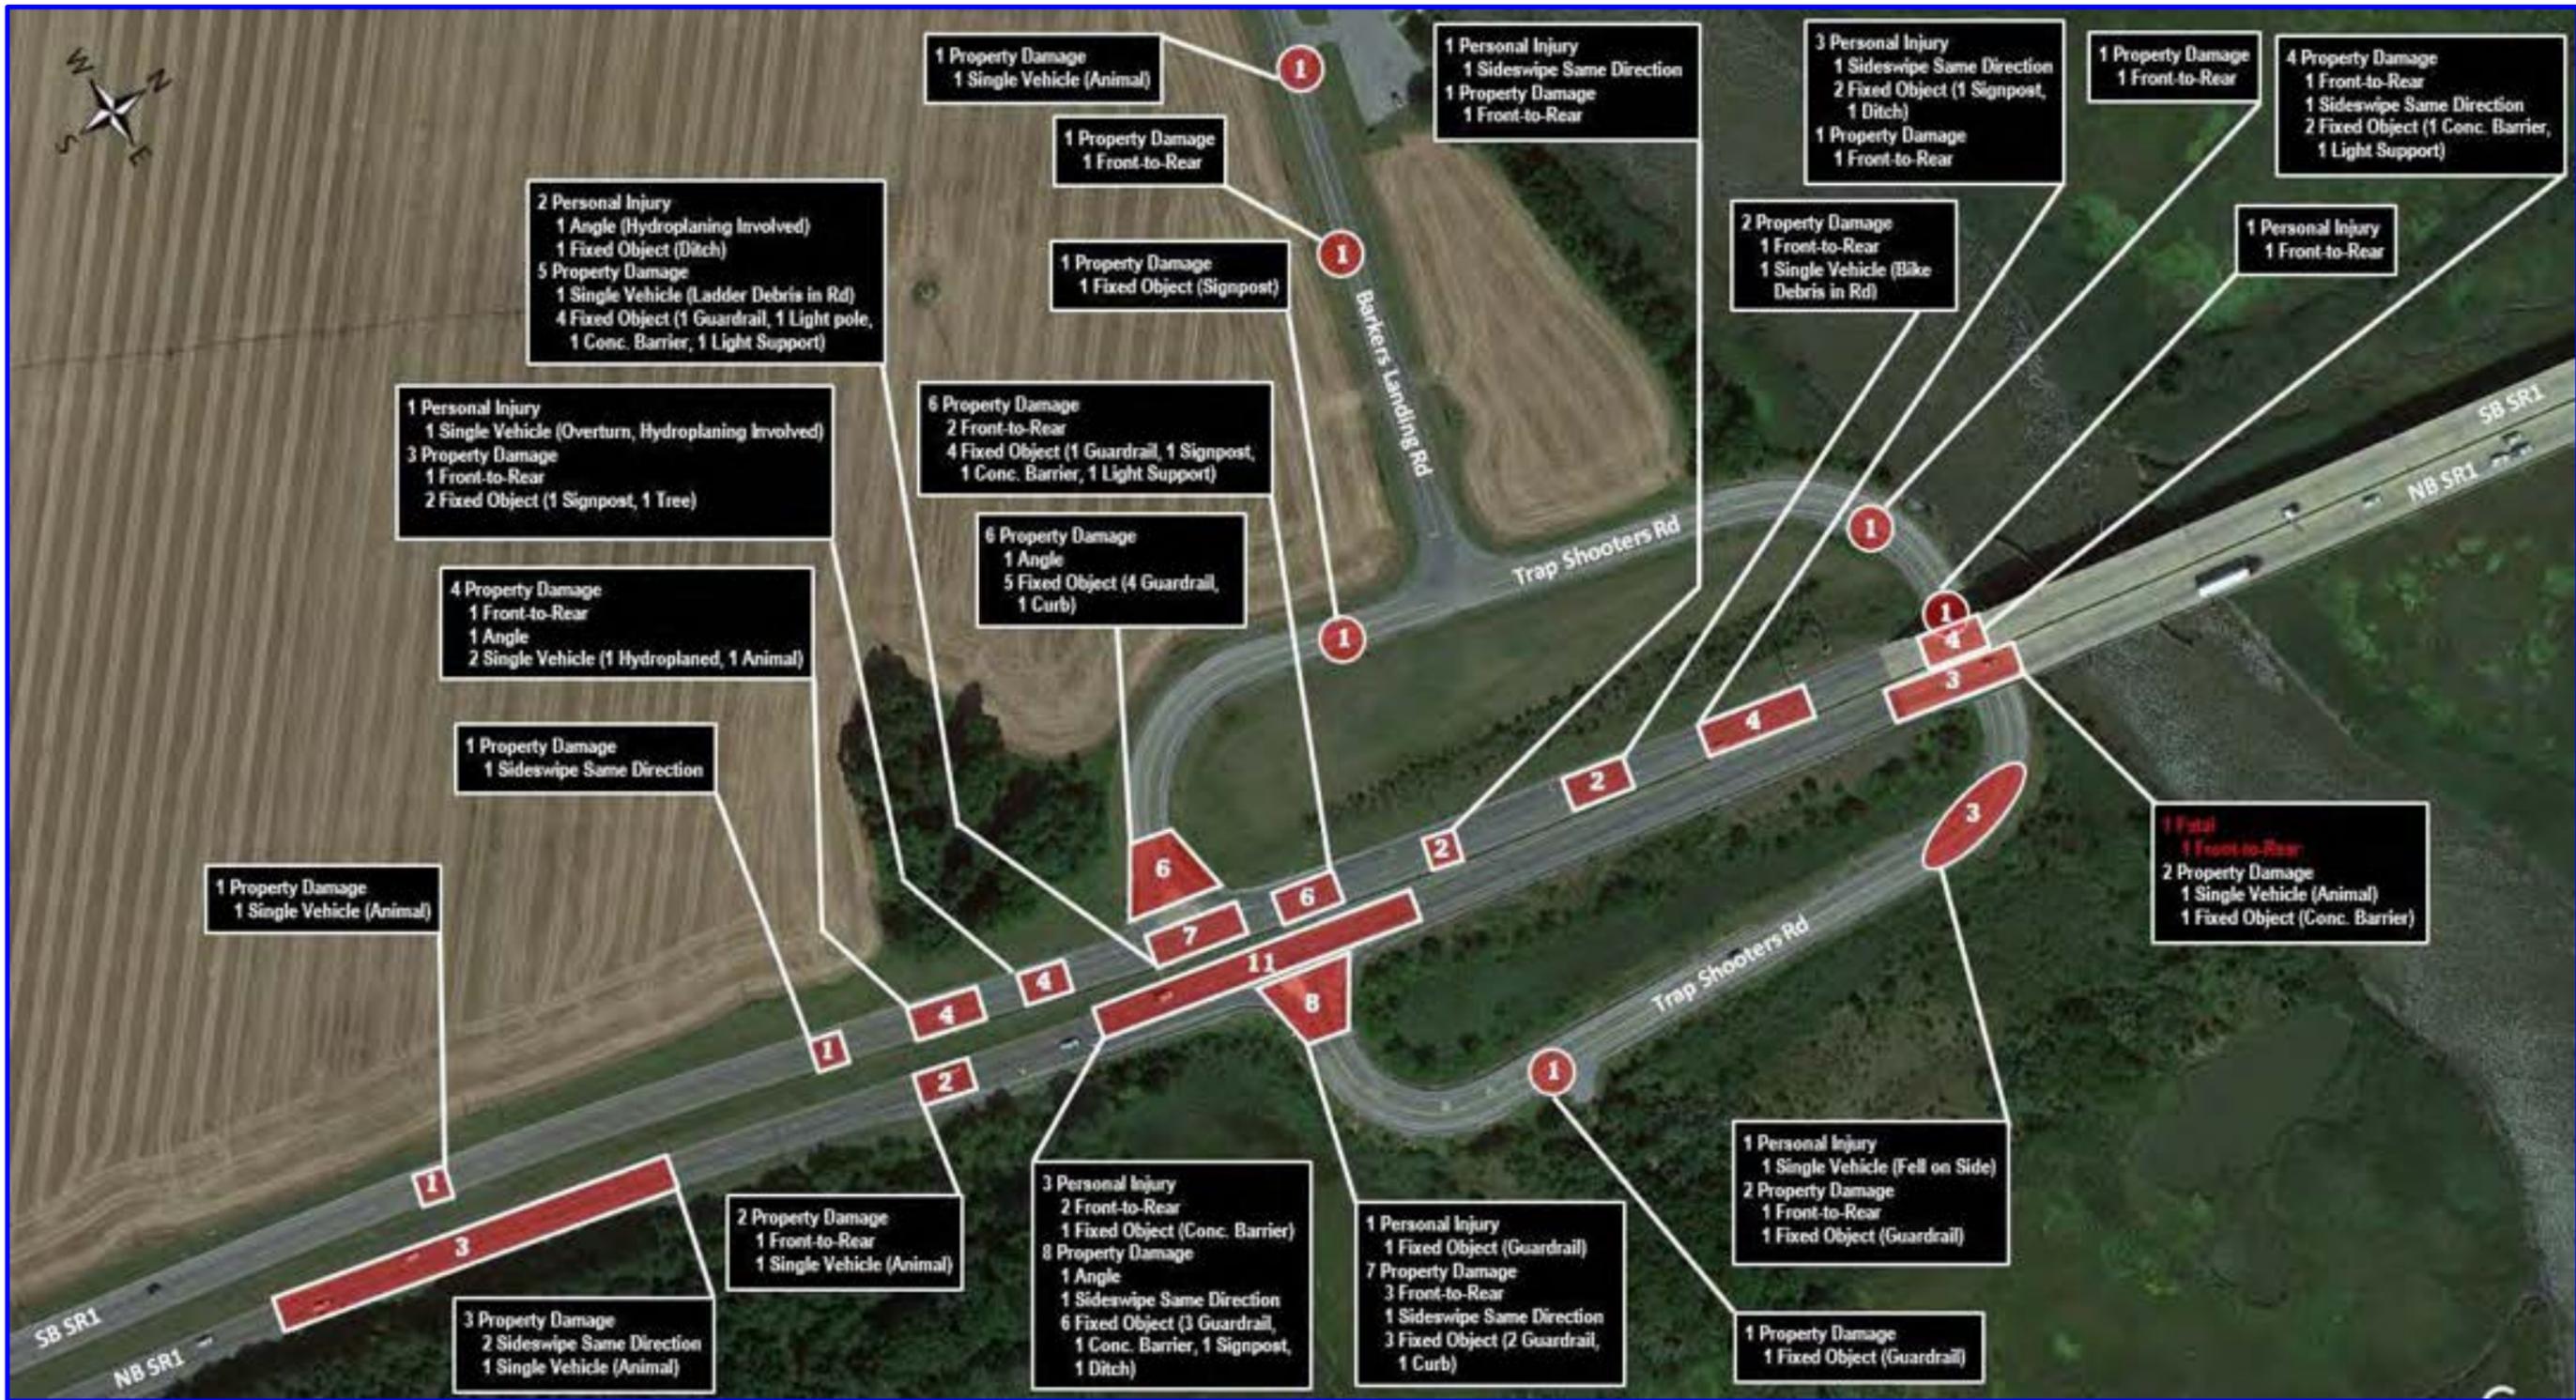

SR1 and Trap Shooters Road Interchange

Trap Shooters Road

A total of twenty-one (21) crashes were reported as occurring on Trap Shooters Road for the 5-year period, comprising three (3) personal injury and eighteen (18) property damage only crashes. A total of three (3) people were injured in the injury crashes. A majority of the crashes (13 / 61.9%) were reported as not a collision between two vehicles followed by (3 / 14.3%) each of front-to-front and front-to-rear crashes. One (1 / 4.8%) each of angle crashes and sideswipe same direction crashes were also reported. **Table 5** presents annual and five-year summary of the types of crashes by severity i.e., Property Damage (PD) and Personal Injury (PI).

Table 5 - Trap Shooters Road Crash Type and Severity

Collision Type	Crash Severity / Classification															Crash Severity / Classification			
	PD	PI	Total	PD	PI	Total No. of Crashes	% of Total Crashes												
	October 31, 2017 - October 31, 2018			October 31, 2018 - October 31, 2019			October 31, 2019 - October 31, 2020			October 31, 2020 - October 31, 2021			October 31, 2021 - October 31, 2022			5-Year Totals			
Front to Front	0	1	1	0	0	0	1	0	1	0	0	0	1	0	1	2	1	3	14.3%
Front to Rear	0	0	0	1	0	1	1	0	1	1	0	1	0	0	0	3	0	3	14.3%
Angle	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	4.8%
Sideswipe, Opposite Direction	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	4.8%
Not a Collision Between Two Vehicles	4	1	5	1	1	2	5	0	5	1	0	1	0	0	0	11	2	13	61.9%
Total	5	2	7	3	1	4	7	0	7	2	0	2	1	0	1	18	3	21	100.0%

Figure 9 presents a graphical representation of the annual crashes. As provided in the figure, the highest number of annual crashes, seven (7), was reported during the 2017–2018 and 2019–2020 period. Four (4) crashes were reported for the 2018–2019 period, approximately 42.9% lower than both the prior and the following 12-month period. For the 2020–2021 period, reported crashes dropped approximately 71.4% from seven (7) to two (2). Reported crashes dropped 50.0% from two (2) the preceding 12-month period to one during the most recent one-year period from October 31, 2021, to October 31, 2022. It appears reported crashes for Trap Shooters Road are on a downward trend.

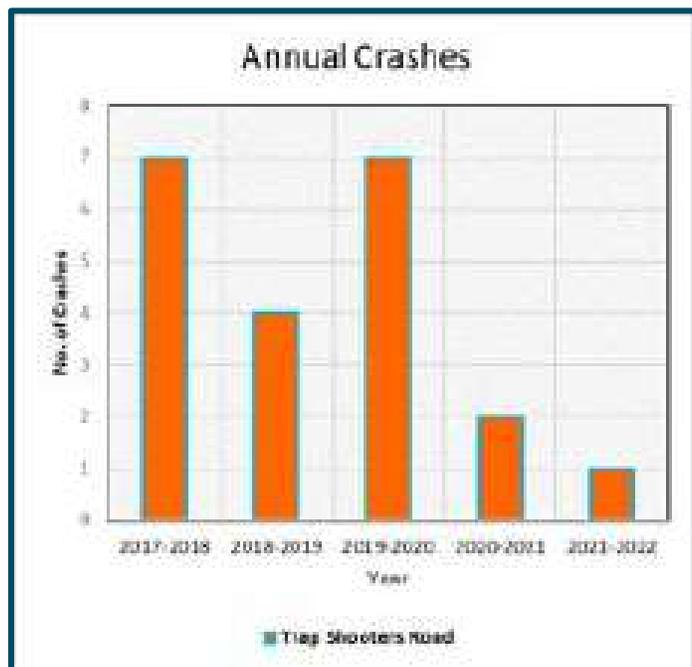


Figure 9 - Trap Shooters Road Annual Crashes

Southbound SR1

A total of thirty-five (35) crashes were

SR1 and Trap Shooters Road Interchange

reported as occurring on SB SR1 for the 5-year period, comprising seven (7) personal injury and twenty-eight (28) property damage only crashes. A total of eight (8) people were injured in the seven injury crashes. A majority of the crashes (21 / 60.0%) were reported as not a collision between two vehicles followed by (8 / 22.9%) front-to-front crashes. Four (4 / 11.4%) sideswipe same direction crashes and two (2 / 5.7%) angle crashes were also reported. **Table 6** presents annual and three-year summary of the types of crashes by severity i.e., Property Damage (PD) and Personal Injury (PI).

Collision Type	Crash Severity / Classification															Crash Severity / Classification			
	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	Total No. of Crashes	% of Total Crashes
	October 31, 2017 - October 31, 2018			October 31, 2018 - October 31, 2019			October 31, 2019 - October 31, 2020			October 31, 2020 - October 31, 2021			October 31, 2021 - October 31, 2022			5-Year Totals			
Front to Rear	3	0	3	1	0	1	1	0	1	1	0	1	2	0	2	8	0	8	22.9%
Angle	0	0	0	0	0	0	1	1	2	0	0	0	0	0	0	1	1	2	5.7%
Sideswipe, Same Direction	0	0	0	0	0	0	1	1	2	1	0	1	0	1	1	2	2	4	11.4%
Not a Collision Between Two Vehicles	2	0	2	2	1	3	7	1	8	3	1	4	3	1	4	17	4	21	60.0%
Total	5	0	5	3	1	4	10	3	13	5	1	6	5	2	7	28	7	35	100.0%

Figure 10 presents a graphical representation of the annual crashes. As provided in the figure, the highest number of annual crashes, thirteen (13), was reported during the 2019–2020 period. Five (5) crashes were reported for the 2017–2018 period, approximately 61.5% lower than 2019–2020 period. For the 2018–2019 period, reported crashes dropped from five (5) to four (4), a 20% decrease. For the 2020–2021 period, reported crashes dropped approximately 53.8% from thirteen (13) to six (6). During the most recent one-year period from October 31, 2021, to October 31, 2022, reported crashes increased from six (6) for the preceding 12-month period to seven (7), i.e., by approximately 16.7%. While reported crashes have dropped significantly since the 2019–2020 period, it appears crash frequency is on SB SR1 is on an upward trend.

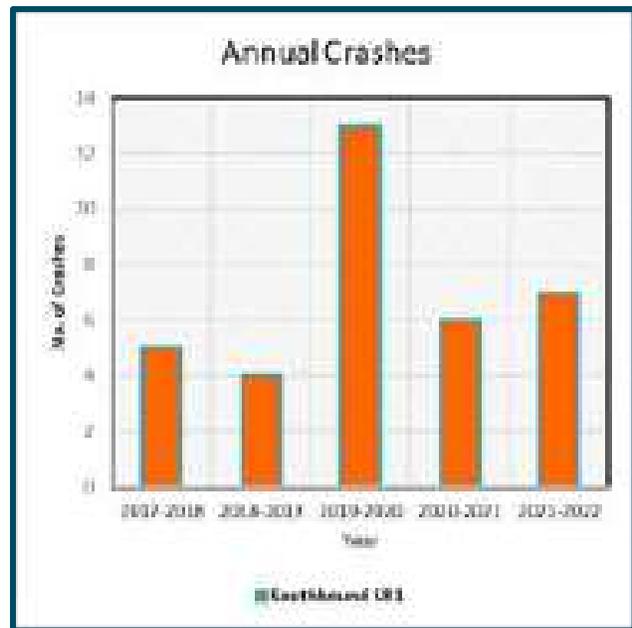


Figure 10 - Southbound SR1 Annual Crashes

SR1 and Trap Shooters Road Interchange


Northbound SR1

A total of nineteen (19) crashes were reported as having occurred on NB SR1 for the 5-year period, comprising one (1) fatal, three (3) personal injury and fifteen (15) property damage only crashes. One person died in the fatal crash and a total of eleven (11) people were injured in the three injury crashes. A majority of the crashes (11 / 57.9%) were reported as not a collision between two vehicles followed front-to-front and sideswipe same direction crashes, of which three each (3 / 15.8%) were reported. The remainder of the reported crashes comprised one (1 / 5.3%) front-to-front crash, which resulted in the fatality, and one (1 / 5.3%) angle crash. **Table 11** presents annual and three-year summary of the types of crashes by severity i.e., Property Damage (PD) and Personal Injury (PI) and Fatal (F).

Collision Type	Crash Severity / Classification															Crash Severity / Classification					
	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	F	Total	PD	PI	Total	PD	PI	F	Total No. of Crashes	% of Total Crashes
	October 31, 2017 - October 31, 2018			October 31, 2018 - October 31, 2019			October 31, 2019 - October 31, 2020			October 31, 2020 - October 31, 2021				October 31, 2021 - October 31, 2022			5-Year Totals				
Front to Front	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1	1	5.3%
Front to Rear	0	0	0	0	0	0	1	1	2	0	0	0	0	0	1	1	1	2	0	3	15.8%
Angle	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	0	1	0	0	1	5.3%
Sideswipe, Same Direction	2	0	2	0	0	0	1	0	1	0	0	0	0	0	0	0	3	0	0	3	15.8%
Not a Collision Between Two Vehicles	3	0	3	3	0	3	1	0	1	2	0	0	2	1	1	2	10	1	0	11	57.9%
Total	5	0	5	3	0	3	3	1	4	3	0	1	4	1	2	3	15	3	1	19	100.0%

Table 7 - Northbound SR1 Crash Type and Severity

Figure 11 presents a graphical representation of the annual crashes. As provided in the figure, the highest number of annual crashes, five (5), was reported during the 2017–2018 period. Three (3) crashes were reported for the 2018–2019 period, 40% lower than the preceding year. For the 2019–2020 period, reported crashes increased from three (3) to four (4), a 33.3% increase. For the 2020–2021 period, reported crashes remained the same as for the preceding year. During the most recent one-year period from October 31, 2021, to October 31, 2022, reported crashes decreased from four (4) for the preceding 12-month period to seven (3), a 25% decrease. It appears from the data that crash frequency on

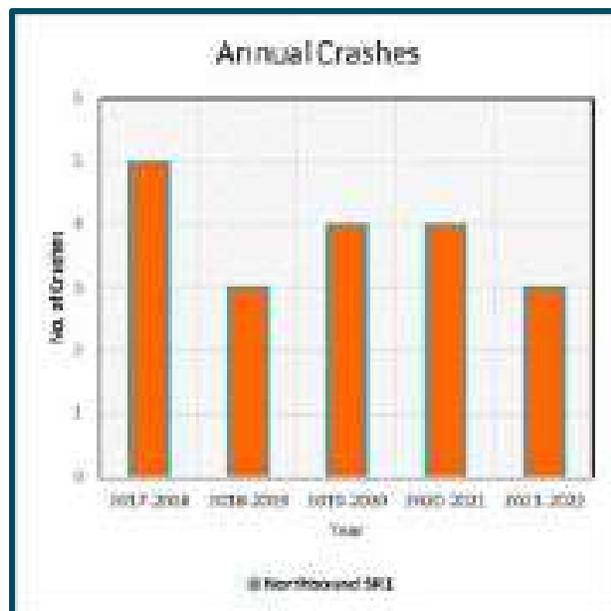

NB SR1 has remained lower for the last four years than they were for the 2017-2018 period and have not fluctuated significantly.

Figure 11 - Northbound SR1 Annual Crashes

SR1 and Trap Shooters Road Interchange

Crash Rates

Crash rates for the length of the study roadways within the study area were computed for 2018, 2019, 2020 and 2021 and compared to the 2018, 2019, 2020 and 2021 crash rates obtained from DeIDOT for roadways with similar characteristics in Kent County and statewide. The entire length of Trap Shooters Road was considered within the study length. The rates were computed for the years identified for which the five-year crash data includes a full calendar year in addition to current availability of annual average daily traffic (AADT) from DeIDOT. Since the crash rates for Kent County and State of Delaware are based on calendar year data, this allows for a fair comparison. The crash rates are measured in crashes per million vehicle miles travelled (C/MVMT).

Available DeIDOT gateway AADT for SR1 is bidirectional. Based on Wavetronix device data in the vicinity of the study area, NB SR1 and SB SR1 diurnal traffic volumes average out close to even. The directional AADT were therefore assigned according to a 50% directional distribution.

SR1 (northbound and southbound) is functionally classified as Other Expressway & Freeway. Northbound SR1 and Southbound SR1 crash rates were compared to the crash rates for similar Other Expressways and Freeway in Kent County and statewide. Trap Shooters Road and Barkers Landing Road are both two-lane roadways classified as Major Collectors. Since the current setting of these two roads is more rural than urban, their crash rates were compared to the crash rates for similar Rural Major Collectors in Kent County and statewide. **Table 8, Table 9, Table 10, and Table 11** respectively present the 2018, 2019, 2020 and 2021 crash rates for the study roadways and the 2018, 2019, 2020 and 2021 crash rates for similar roadways in Kent County and statewide.

Road	Functional Class	2018 AADT	No of Crashes (2018)	Length	Roadway Crash Rate (C/MVMT) (2018)	2018 Kent County Crash Rate (C/MVMT)	2018 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	18,664	4	0.65	0.90	0.77	0.67
Southbound SR1	Other Expressway & Freeway	18,664	5	0.65	1.13	0.77	0.67
Trap Shooters Rd	Rural Major Collector	1,784	7	0.44	24.43	2.47	2.88
Barkers Landing Rd	Rural Major Collector	1,898	2	0.16	18.04	2.47	2.88

Table 8 - 2018 Study Roadways Crash Rate

SR1 and Trap Shooters Road Interchange

Road	Functional Class	2019 AADT	No of Crashes (2019)	Length	Roadway Crash Rate (C/MVMT) (2019)	2019 Kent County Crash Rate (C/MVMT)	2019 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	18,808	4	0.65	0.90	0.17	0.13
Southbound SR1	Other Expressway & Freeway	18,808	5	0.65	1.12	0.17	0.13
Trap Shooters Rd	Rural Major Collector	1,847	5	0.44	16.86	0.75	0.76
Barkers Landing Rd	Rural Major Collector	1,989	0	0.16	0.00	0.75	0.76

Table 9 - 2019 Study Roadways Crash Rate

Road	Functional Class	2020 AADT	No of Crashes (2020)	Length	Roadway Crash Rate (C/MVMT) (2020)	2020 Kent County Crash Rate (C/MVMT)	2020 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	14,962	3	0.65	0.85	0.18	0.15
Southbound SR1	Other Expressway & Freeway	14,962	13	0.65	3.66	0.18	0.15
Trap Shooters Rd	Rural Major Collector	1,468	5	0.44	21.21	0.54	0.67
Barkers Landing Rd	Rural Major Collector	1,581	0	0.16	0.00	0.54	0.67

Table 10 - 2020 Study Roadways Crash Rate

Road	Functional Class	2021 AADT	No of Crashes (2021)	Length	Roadway Crash Rate (C/MVMT) (2021)	2021 Kent County Crash Rate (C/MVMT)	2021 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	19,533	5	0.65	1.08	0.15	0.14
Southbound SR1	Other Expressway & Freeway	19,533	8	0.65	1.73	0.15	0.14
Trap Shooters Rd	Rural Major Collector	1,714	2	0.44	7.27	0.54	0.67
Barkers Landing Rd	Rural Major Collector	2,018	0	0.16	0.00	0.54	0.67

Table 11 - 2021 Study Roadways Crash Rate

SR1 and Trap Shooters Road Interchange

The ratio of each study roadway crash rate to the rate for Kent County and the State of Delaware for similar roadways in 2018, 2019, 2020 and 2021 were also computed. The 2018, 2019, 2020 and 2021 crash rate comparisons are respectively provided in **Table 12**, **Table 13**, **Table 14** and **Table 15**.

Functional Class	Ratio of 2018 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2018 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	1.17	1.35
Southbound SR1	1.47	1.69
Trap Shooters Rd	9.89	8.48
Barkers Landing Rd	7.31	6.27

Table 12 - 2018 Study Roadways Crash Rates Ratio to County and State Rates

Functional Class	Ratio of 2019 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2019 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	5.27	6.90
Southbound SR1	6.59	8.62
Trap Shooters Rd	22.47	22.18
Barkers Landing Rd	0.00	0.00

Table 13 - 2019 Study Roadways Crash Rates Ratio to County and State Rates

SR1 and Trap Shooters Road Interchange

Functional Class	Ratio of 2020 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2020 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	4.70	5.63
Southbound SR1	20.35	24.41
Trap Shooters Rd	39.27	31.65
Barkers Landing Rd	0.00	0.00

Table 14 - 2020 Study Roadways Crash Rates Ratio to County and State Rates

Functional Class	Ratio of 2021 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2021 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	7.19	7.71
Southbound SR1	11.51	12.33
Trap Shooters Rd	13.45	10.84
Barkers Landing Rd	0.00	0.00

Table 15 - 2021 Study Roadways Crash Rates Ratio to County and State Rates

As provided in the tables, the 2018 crash rates for all the study roadways are higher than those for similar roadways in the County and Statewide. For 2019, 2020 and 2021, no crashes were reported on Barkers Landing Road for the segment assessed as part of this study, therefore crash rates were zero, lower than for the Kent County and statewide. As the ratios show, for NB SR1, SB SR1 and Trap Shooters Road, the crash rates for 2019, 2020 and 2021 are much higher than for similar roadways in Kent County and statewide.

SR1 and Trap Shooters Road Interchange

Northbound SR1

As provided in **Table 12** through **Table 15**, the NB SR1 crash rate ratios compared to the Kent County and statewide rates increased sharply in 2019 compared to the 2018 ratios. The 2020 ratios dropped some compared to the 2019 ratios, then increased more than they dropped for 2021.

Southbound SR1

As provided in **Table 12** through **Table 15**, the SB SR1 crash rate ratios to the Kent County and statewide rates increased sharply in 2019 compared to the 2018 ratios. The 2020 rates increased steeply from the 2019 6.59 times the Kent County rate of 0.17 and 8.62 times the statewide rate of 0.13, to 22.47 times the Kent County rate of 0.18 and 22.18 times the statewide rate of 0.15. For 2021, the ratios dropped by almost half, but the crash rate was still 11.51 times the Kent County rate of 0.15, and 12.33 times the statewide rate of 0.14.

Trap Shooters Road

As provided in **Table 12** through **Table 15**, the Trap Shooters crash rate ratios to the Kent County and statewide rates increased steeply in 2019 compared to the 2018 ratios. The 2019 rates increased from the 2018 by 9.89 times the Kent County rate of 2.47, and 8.48 times the statewide rate of 2.88, to 22.47 times the Kent County rate of 0.75 and 22.18 times the statewide rate of 0.76. The 2020 rates again increase sharply from the 2019 rates to 39.27 times the Kent County rate of 0.54 and 31.65 times the statewide rate of 0.67. For 2021, the ratios dropped, but the crash rate was still 13.45 times the Kent County rate of 0.54 and 10.84 times the statewide rate of 0.67.

Public Involvement

Public involvement is an integral element of any successful planning study. The SR1 and Trap Shooter Road Project developed a public engagement strategy to help garner as much public input on the process and proposed alternative as possible. Based on the rural location of the project, it was decided that the initial public workshop would be an online virtual experience followed by an in-person workshop style to present the proposed alternatives and have one-on-one conversations with the public. Several strategies were employed to advertise the public workshops. Both workshops involved a direct mailing to the local residents to notify them of the upcoming workshop. A project webpage was created by and housed on the MPO website. Information was provided to the local legislators, and they used those materials to advertise the workshops in their newsletters. The workshops were also advertised and placed on the DelDOT public meeting calendar. The following provides a summary of the public involvement and outreach that occurred throughout the study and helped guide the development of conceptual improvement alternatives:

Community Workshop 1

January 23, 2023

- Location: Virtual via Zoom Webinar
- Advertised through direct mailings, legislative newsletters, MPO website and social media, DelDOT website.
- Century Engineering presented a PowerPoint presentation including the study area, purpose and need, work plan, existing conditions, current DelDOT efforts, the proposed study schedule and then took questions after the presentation.

SR1 and Trap Shooters Road Interchange

- 13 people registered for the workshop and 8 people attended.
- Community members were asked for feedback on their main concerns about how the intersection operates today.
- 4 Comments were received
- See **Appendix D** for Public Involvement Summaries

Community Workshop 2

March 28, 2023

- Location: In-Person – McIlvaine Elementary School
- Advertised through direct mailings, legislative newsletters, MPO website and social media, DelDOT website.
- Century Engineering presented numerous display boards with information including the study area, project goals, existing traffic volumes, crash data, 4 alternatives, measures of effectiveness, and the anticipated schedule for the study.
- Feedback was gathered from attendees through conversations with Century Engineering personnel, questionnaires, and comment forms.
- 39 Attendees
- 26 Comments were received
- See **Appendix D** for Public Involvement Summaries

Public Advisory Committee (PAC)

June 8, 2023

- Study Area
- Goals
- Crash Summary
- Existing LOS
- Existing Crash Data
- First Workshop Summary
- Second Workshop Summary
- Preferred Alternative
- Alternatives considered but not progressed
- Cost Estimates
- Schedule & Next Steps

Technical Advisory Committee (TAC)

June 13, 2023

- Study Area
- Goals
- Crash Summary
- Existing LOS
- Existing Crash Data
- First Workshop Summary
- Second Workshop Summary
- MOE/Sensitivity Analysis
- Preferred Alternative
- Alternatives considered but not progressed
- Cost Estimates
- Schedule & Next Steps

SR1 and Trap Shooters Road Interchange

MPO Council Presentation

- Study Area
- Goals
- Crash Summary
- Existing LOS
- Existing Crash Data
- First Workshop Summary

July 6, 2023

- Second Workshop Summary
- MOE/Sensitivity Analysis
- Preferred Alternative
- Alternatives considered but not progressed
- Cost Estimates

Alternatives Considered

A total of 4 alternatives were included as part of this study. Each alternative met the criteria of the purpose and need. Alternative 1 and 2 utilized the existing roadway geometry at Barkers Landing Road and Trap Shooters Road and made modification to the ramps to meet current Federal and State standards. Alternative 3 and 4 created a new connection from Barkers Landing Road to SR1 and implemented a higher type interchange to better address the overall safety and congestion concerns.



Figure 12 - Alternatives Overview

Alternative 1 – Relocation of existing ramps filling impacted wetlands

This alternative shifts the SB SR1 offramps to the south and increases the exit ramp radius. It also reconfigured the Barkers Landing Road and Trap Shooters Road Intersection to allow EB Barkers Landing

SR1 and Trap Shooters Road Interchange

Road to access the NB SR1 ramp without stopping. SB SR1 existing traffic would have to stop at Barkers Landing Road prior to making a left turn to head WB in Magnolia.

NB SR1 Access ramps would be relocated approximately $\frac{3}{4}$ of a mile to the south to allow for interstate standard deceleration lanes and acceleration lanes to be developed along SR1 prior to entering onto the Barkers Landing Bridge. The extension of Trap Shooters Road south, parallel to existing SR1, would require the crossing of a small area of identified wetlands. This alternative contemplates filling of the wetlands and mitigation of those impacts in an area adjacent to the project.

Alternative 2 = Relocation of existing ramps with bridge over impacted wetlands

This alternative shifts the SB SR1 offramps to the south and increases the exit ramp radius. It also reconfigured the Barkers Landing Road and Trap Shooters Road Intersection to allow EB Barkers Landing Road to access the NB SR1 ramp without stopping. SB SR1 existing traffic would have to stop at Barkers Landing Road prior to making a left turn to head WB in Magnolia.

NB SR1 Access ramps would be relocated approximately $\frac{3}{4}$ of a mile to the south to allow for interstate standard deceleration lanes and acceleration lanes to be developed along SR1 prior to entering onto the Barkers Landing Bridge. The extension of Trap Shooters Road south, parallel to existing SR1, would require the crossing of a small area of identified wetlands. This alternative contemplates bridging the wetlands with a 300' long bridge over the wetlands. All other design details are the same as Alternative 1.

Alternative 3 – New alignment from Barkers Landing Road to SR1 with new diamond interchange

This alternative creates a new ramp alignment from Barkers Landing Road to SR1. The new connection with SR1 allows for a more efficient interchange design with SR1. Alternative 3 considers using a diamond interchange that allows for traffic to easily access both NB and SB SR1.

The diamond interchange ramps are designed to meet all state and federal design standards for interstate interchanges. Alternative 3 impacts several agricultural areas west of SR1 including 2 pivot irrigation systems.

Alternative 4 - New alignment from Barkers Landing Road to SR1 with new trumpet interchange

This alternative creates a new ramp alignment from Barkers Landing Road to SR1. The new connection with SR1 allows for a more efficient interchange design with SR1. Alternative 4 considers using a trumpet interchange that allows for traffic to easily access both NB and SB SR1.

The trumpet interchange ramps are designed to meet all state and federal design standards for interstate interchanges. Alternative 4 impacts several agricultural areas west of SR1 including 2 pivot irrigation systems.

Conceptual plans for each alternative are provided in **Appendix E** of this report.

SR1 and Trap Shooters Road Interchange

Alternatives Evaluation

The alternatives were evaluated using a comparison matrix to assess both the physical and traffic operational impacts associated with each of the alternatives. The traffic analysis evaluated the future volumes and the ramp merge areas with SR1. It also looked at travel time and differences and the overall crash reductions that can be expected based on the new design configurations.

Future Traffic Volumes

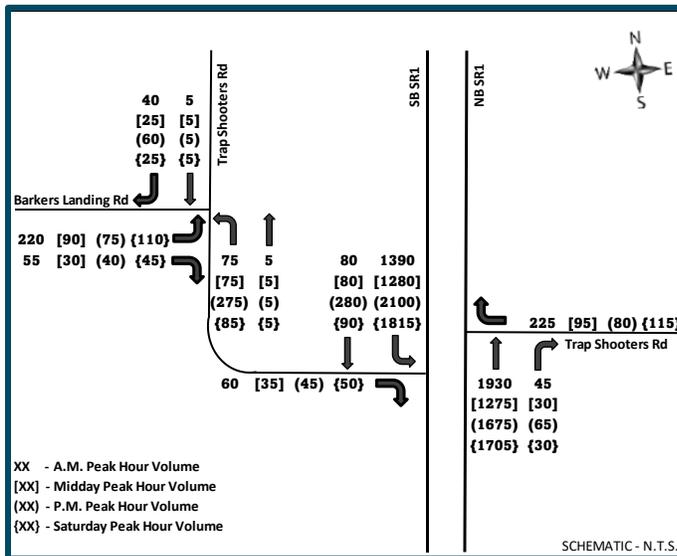


Figure 13 - 2028 Non-Summer Peak Hour Turning Movement Traffic Volumes

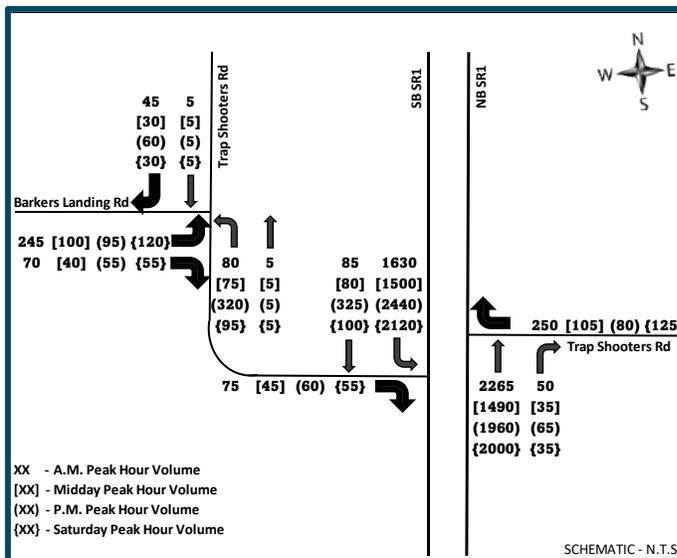


Figure 14- 2050 Non-Summer Peak Hour Turning Movement Traffic Volumes

SR1 and Trap Shooters Road Interchange

Opening Year 2028 and design year 2050 traffic volumes presented in **Figure 13** and **Figure 14** were generated by DeIDOT Planning based on the existing traffic volumes submitted. The Delmarva Peninsula Travel Demand Model (TDM) was used in the development of the future traffic forecast. Summer Saturday traffic forecast was not included in the data received; therefore, Century used the growth factor computed based on the ratio of the non-summer Saturday forecasts to the existing Saturday

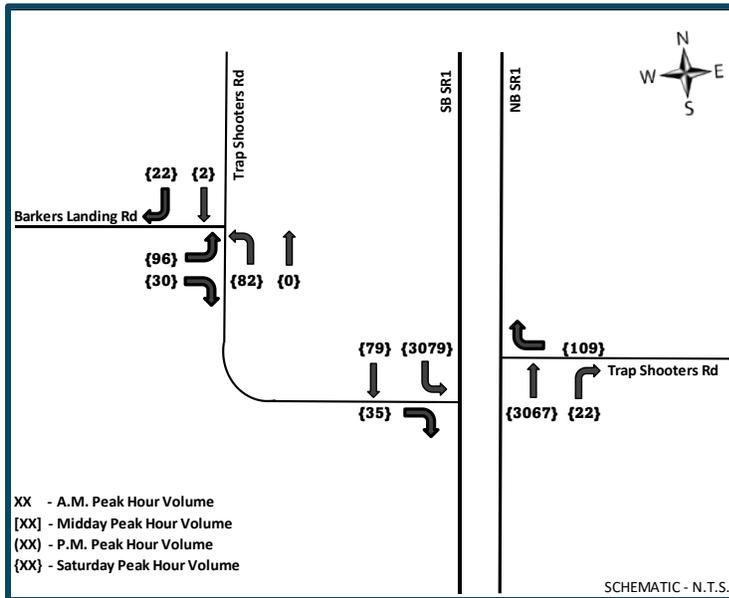


Figure 15 - 2028 Summer Saturday Peak Hour Turning Movement Traffic Volumes

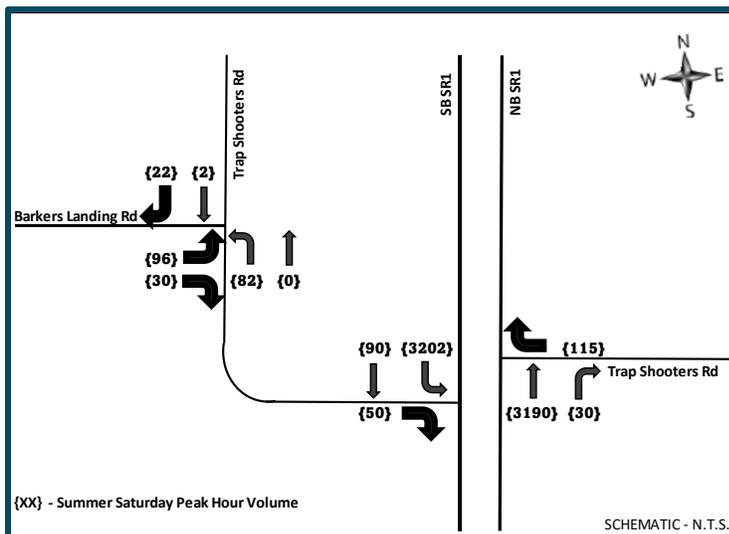


Figure 16 - 2050 Summer Saturday Peak Hour Turning Movement Traffic Volumes

traffic volumes. The Opening Year 2028 and design year 2050 Summer Saturday traffic volumes generated are shown in **Figure 15** and **Figure 16**.

SR1 and Trap Shooters Road Interchange

Ramp Analysis

Since the existing conditions analysis already show unacceptable operational results for the existing intersections, future without improvements (No-Build) was not analyzed. Four improvement alternatives were developed, all of which allow for access to and from SR1 via ramps with AASHTO compliant acceleration and deceleration lanes. Per HCM methodology for freeway facilities, freeway basic segments, ramps merge, and ramps diverge influence areas, the measures of effectiveness presented for future (Build) conditions are density measured in passenger car per mile per lane (pc/mi/ln) and LOS. Merge and diverge influence areas and the LOS criteria for them are presented in the full traffic report found in **Appendix C**.

There were no significant variations in densities between alternatives for the basic freeway segments and ramps merge/diverge influence areas and therefore there were no differences in LOS between alternatives. LOS for the various segments for Opening Year 2028 and Design Year 2050 for all Alternatives are presented in Table 16 for northbound and Table 17 for southbound. For year 2050, SR1 was analyzed with three lanes in each direction.

Facility	Opening Year 2028 LOS (2-Lane SR1)				Design Year 2050 LOS (3-Lane SR1)			
	Non-Summer			Summer	Non-Summer			Summer
	AM	PM	Saturday	Saturday	AM	PM	Saturday	Saturday
NB Basic Segment South of Exit Ramp	B	B	B	D	B	B	B	C
NB Exit Ramp Diverge Influence Area	C	B	B	D	B	B	B	C
NB Basic Segment between Exit Ramp & Entrance Ramp	B	B	B	D	B	B	B	C
NB Entrance Ramp Merge Influence Area	C	B	B	C	B	A	B	B
NB Basic Freeway Segment North of Entrance Ramp	C	B	B	D	B	B	B	C

Table 16 - Northbound SR1 Freeway Facilities LOS for Future Conditions

Facility	Opening Year 2028 LOS (2-Lane SR1)				Design Year 2050 LOS (3-Lane SR1)			
	Non-Summer			Summer	Non-Summer			Summer
	AM	PM	Saturday	Saturday	AM	PM	Saturday	Saturday
SB Basic Segment North of Exit Ramp	B	C	B	D	A	B	B	C
SB Exit Ramp Diverge Influence Area	B	C	B	D	B	B	B	C
SB Basic Segment between Exit Ramp & Entrance Ramp	B	B	B	D	A	B	B	C
SB Entrance Ramp Merge Influence Area	B	B	B	D	A	B	B	C
SB Basic Freeway Segment South of Entrance Ramp	B	B	B	D	A	B	B	C

Table 17 - Southbound SR1 Freeway Facilities LOS for Future Conditions

SR1 and Trap Shooters Road Interchange

As shown in **Table 16** and **Table 17**, all SR1 segments, northbound and southbound would operate at LOS C or better under both 2028 and 2050 peak hour conditions except for 2028 Summer Saturday under 2-Lane directional conditions. Under the 2028 Summer Saturday conditions almost northbound and southbound segments would operate at LOS D except for the northbound Entrance Ramp influence area, which would operate at LOS C.

Travel Time Analysis

To assess travel time changes between each of the four alternatives and the existing geometric conditions, Synchro/SimTraffic 11 was utilized to develop models for each. Two origin-destination (O-D) locations were assessed – Ponderosa Drive and the Town of Magnolia. The travel time changes were calculated based on travel times generated in SimTraffic. The results are presented in **Table 18** for Ponderosa Drive O-D, and **Table 19** for Town of Magnolia O-D.

Travel Time Change with Ponderosa Drive Origin-Destination																
Travel Time Change (Seconds)	Alt 1 Geometry				Alt 2 Geometry				Alt 3 Geometry				Alt 4 Geometry			
	Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip	
	Inbound	Outbound	Inbound	Outbound												
XX = Increase; (XX) = Decrease	11.7	20.6	12.5	6.7	0.2	9.2	9.7	5.7	(22.6)	(15.9)	63.5	9.0	(21.7)	4.5	62.6	10.4

Table 18 - Travel Time Change with Ponderosa Drive Origin-Destination

Travel Time Change with Magnolia Origin-Destination																
Travel Time Change (Seconds)	Alt 1 Geometry				Alt 2 Geometry				Alt 3 Geometry				Alt 4 Geometry			
	Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip	
	Inbound	Outbound	Inbound	Outbound												
XX = Increase; (XX) = Decrease	11.7	20.6	12.5	6.7	0.2	9.2	9.7	5.7	(72.8)	(72.4)	13.3	(47.5)	(71.9)	(53.2)	12.7	(47.3)

Table 19 - Travel Time Change with Town of Magnolia Origin-Destination

Safety Improvement / Crash Reduction Benefit

Crashes for calendar year 2018 through 2021 were used to assess the safety benefits of the proposed improvements in terms of their potential for crash reduction. Only crashes susceptible to correction with the geometric improvements were included in the assessment. All four proposed alternatives allow for access to and from SR1 via ramps with AASHTO compliant acceleration and deceleration lanes, therefore the crash reduction potential would be the same irrespective of the alternative that is selected and built. The 2010 AASHTO Highway Safety Manual was used to determine the crash modification factor (CMF) used in computing the potential crash reduction. Estimated annual monetary value of the reduction in crashes was obtained using the US Department of transportation (USDOT) suggested 2021 base year dollar rates. The results are summarized in **Table 20**. As provided in the table, the project would yield an estimated annual crash reduction benefit of approximately \$3.5 million.

SR1 and Trap Shooters Road Interchange

Crash Reduction Benefits Due to Project (All Alternatives)				
	No. of Vehicles involved in Property Damage Crashes	Injury Crashes	Fatal Crashes	Total Annual Crash Reduction Benefit
2018 through 2021 Calendar Years*	72	11	1	
Crash Modification Factor (CMF)	0.84	0.84	0.84	
Crashes after Project	60.48	9.24	0.84	
Annual Crash Reduction	15.12	2.31	0.21	
USDOT Monetized Value per crash**	\$4,800.00	\$307,800.00	\$13,046,800.00	
Annual Crash Reduction Benefit	\$72,576.00	\$711,018.00	\$2,739,828.00	

* Excluding Crashes with animals as they are not susceptible to reduction with any geometric changes
 ** 2021 Base Year Dollars

Table 20 - Project Estimated Annual Safety Improvement / Crash Reduction Benefit

The physical impacts were evaluated using each of the alternatives layered on aerial imagery with several GIS layers to determine the impacts. The physical impacts that were evaluated included:

- Wetland Impacts – Permanent
- Wetland Impacts – Temporary
- Forested Lands Impacts
- Agricultural Lands Impacts
- Agricultural Land Preservation Impacts
- Irrigation Impacts
- Right-of-Way Needed

Table 21 summarizes the impacts of each alternative on the physical resources. Alternatives 1 and 2 impact the most protected resources. Alternatives 3 and 4 impact the most agricultural lands and require the most right-of-way. The cost estimate information is described in the next section of this report.

SR1 Trap Shooters Road Interchange Study									
Measures of Effectiveness - Physical Impacts									
Measure	UOM	Move SR1 Access Points South No Bridge		Move SR1 Access Points South With Bridge		Alternate 3 New Spur Road to SR1 with Diamond Interchnage		Alternate 4 New Spur Road to SR1 with Trumpet Interchnage	
Wetland Impacts Permanent	Square Feet / Ac	10,155	0.23	786	0.02	0	0.00	0	0.00
Wetland Impacts Temp	Square Feet / Ac	0	0.00	6,621	0.15	0	0.00	0	0.00
Forested Land Impacts	Square Feet / Ac	278,036	6.38	287,930	6.61	357,621	8.21	326,427	7.49
Agricultural Land Impacts	Square Feet / Ac	164,408	3.77	164,408	3.77	549,855	12.62	558,526	12.82
Ag. Land Preservation Impacts	Square Feet / Ac	0	0.00	0	0.00	5,294	0.12	5,294	0.12
Irrigation Impacts	Square Feet / Ac	10,482	0.24	10,482	0.24	123,248	2.83	123,248	2.83
Right-of-way Area	Square Feet / Ac	519,455	11.93	553,971	12.72	919,292	21.10	969,772	22.26
Costs	Thousands Dollars	\$17,500,000		\$25,250,000		\$34,500,000		\$31,700,000	

Table 21 - Alternatives Comparison - Physical Measures of Effectiveness

SR1 and Trap Shooters Road Interchange

Cost Estimates

Conceptual cost estimates were developed for the alternatives evaluated in the study. The following provides a summary of the conceptual cost estimates.

Alternate 1

Preliminary Engineering	\$2,248,360
Right-of-Way	\$1,300,000
Construction	\$13,877,220
Total Cost	\$17,425,580

Alternate 2

Preliminary Engineering	\$3,348,610
Right-of-Way	\$1,400,000
Construction	\$20,487,951
Total Cost	\$25,236,561

Alternate 3

Preliminary Engineering	\$4,541,790
Right-of-Way	\$2,300,000
Construction	\$27,697,481
Total Cost	\$34,539,271

Alternate 4

Preliminary Engineering	\$4,107,700
Right-of-Way	\$2,500,000
Construction	\$25,097,374
Total Cost	\$31,705,074

Complete conceptual cost estimates are provided in **Appendix F** of this report.

Final Recommendations

All four Alternates meet the identified purpose and need of the study related to the safety and capacity of SR1 and to reduce high crash rates at the existing design of the interchange. Based on the MOE analysis, Alternative 1 provides the best value for this project, at a cost of \$17,425,580, however there is a concern that the environmental agencies will require that the wetland impacts be minimized resulting in the need to consider Alternative 2. The Public input generally supports Alternative 1 and therefore Alternative 2 as well.

It is recommended that both Alternative 1 and Alternative 2 be advanced to DelDOT for further development, design, permitting, and construction.

SR1 and Trap Shooters Road Interchange

Appendix A: Environmental Assessment Maps

LEGEND

-  APPROX. LIMITS OF INVESTIGATION
-  APPROX. STUDY AREA
-  SIRB, 1 ZONE
-  WELL HEAD PROTECTION AREAS



550 Bay Road
Dover, DE 19901
P: 302.734.9188

GROUNDWATER MANAGEMENT
ZONES
SR1-TRAP SHOOTERS INTERCHANGE
KENT COUNTY, DELAWARE


Aerial Imagery Source: NAIP (2021)
FirstMap
ArcGIS Online



1 inch = 2,000 feet

LEGEND

-  APPROX. LIMITS OF INVESTIGATION
-  APPROX. STUDY AREA

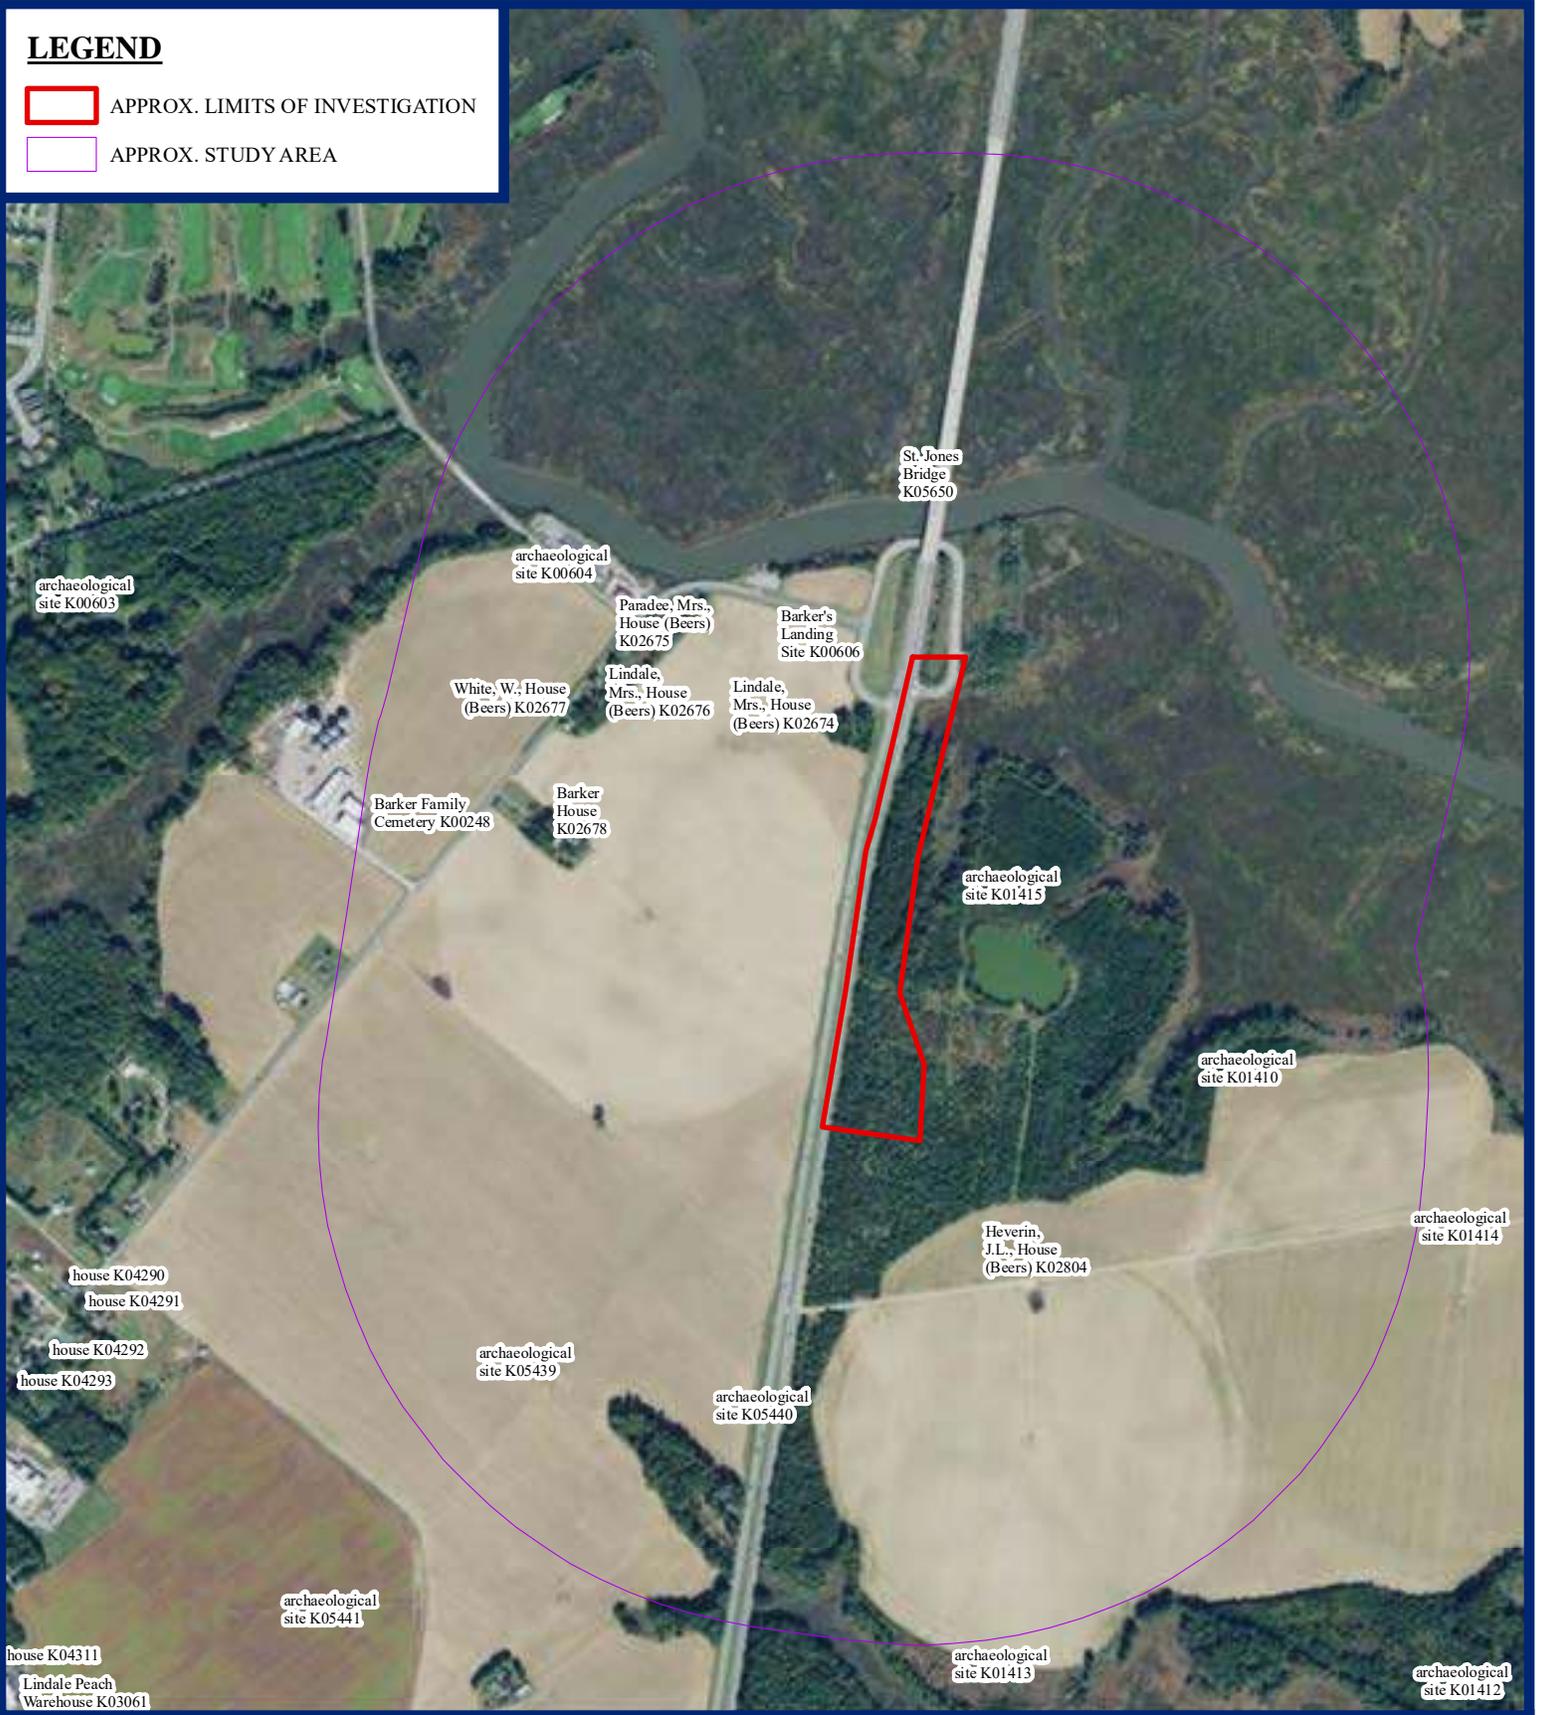

550 Bay Road
Dover, DE 19901
P: 302.734.9188

KNOWN HISTORIC OR
ARCHAEOLOGICAL RESOURCES

SR1-TRAP SHOOTERS INTERCHANGE

KENT COUNTY, DELAWARE

Aerial Imagery Source: NAIP (2021)
ArcGIS Online



1 inch = 1,000 feet

LEGEND

-  APPROX. LIMITS OF INVESTIGATION
-  APPROX. STUDY AREA
-  NERRS BOUNDARY



550 Bay Road
Dover, DE 19901
P: 302.734.9188

NATIONAL ESTUARINE RESEARCH
RESERVE (NOAA)
SR1-TRAP SHOOTERS INTERCHANGE
KENT COUNTY, DELAWARE

Aerial Imagery Source: NAIP (2021)
NOAA
ArcGIS Online



1 inch = 1,000 feet

LEGEND

- APPROX. STUDY AREA
- APPROX. LIMITS OF INVESTIGATION
- ESTUARINE AND MARINE DEEPWATER
- ESTUARINE AND MARINE WETLAND
- FRESHWATER EMERGENT WETLAND
- FRESHWATER FORESTED/SHRUB WETLAND
- FRESHWATER POND
- LAKE
- RIVERINE



550 Bay Road
 Dover, DE 19901
 P: 302.734.9188

NATIONAL WETLANDS INVENTORY
 SR1-TRAP SHOOTERS INTERCHANGE
 KENT COUNTY, DELAWARE

Aerial Imagery Source: NAIP (2021)
 NWI Inventory Source: USFWS (2020)
 ArcGIS Online

N

 1 inch = 2,000 feet

LEGEND

-  APPROX. STUDY AREA
-  APPROX. LIMITS OF INVESTIGATION
-  TAX PARCEL



550 Bay Road
 Dover, DE 19901
 P: 302.734.9188

TAX PARCELS
 SR1-TRAP SHOOTERS INTERCHANGE
 KENT COUNTY, DELAWARE


Aerial Imagery Source: NAIP (2021)
 Parcel Source: FirstMap (2022)
 ArcGIS Online



1 inch = 1,000 feet

LEGEND

-  APPROX. LIMITS OF INVESTIGATION
-  APPROX. STUDY AREA
-  BOAT DOCK
-  BOAT RAMP
-  FISHING PIER
-  PICNIC AREA
-  NATURAL AREAS
-  OUTDOOR RECREATION AREAS
-  PUBLIC PROTECTED LANDS

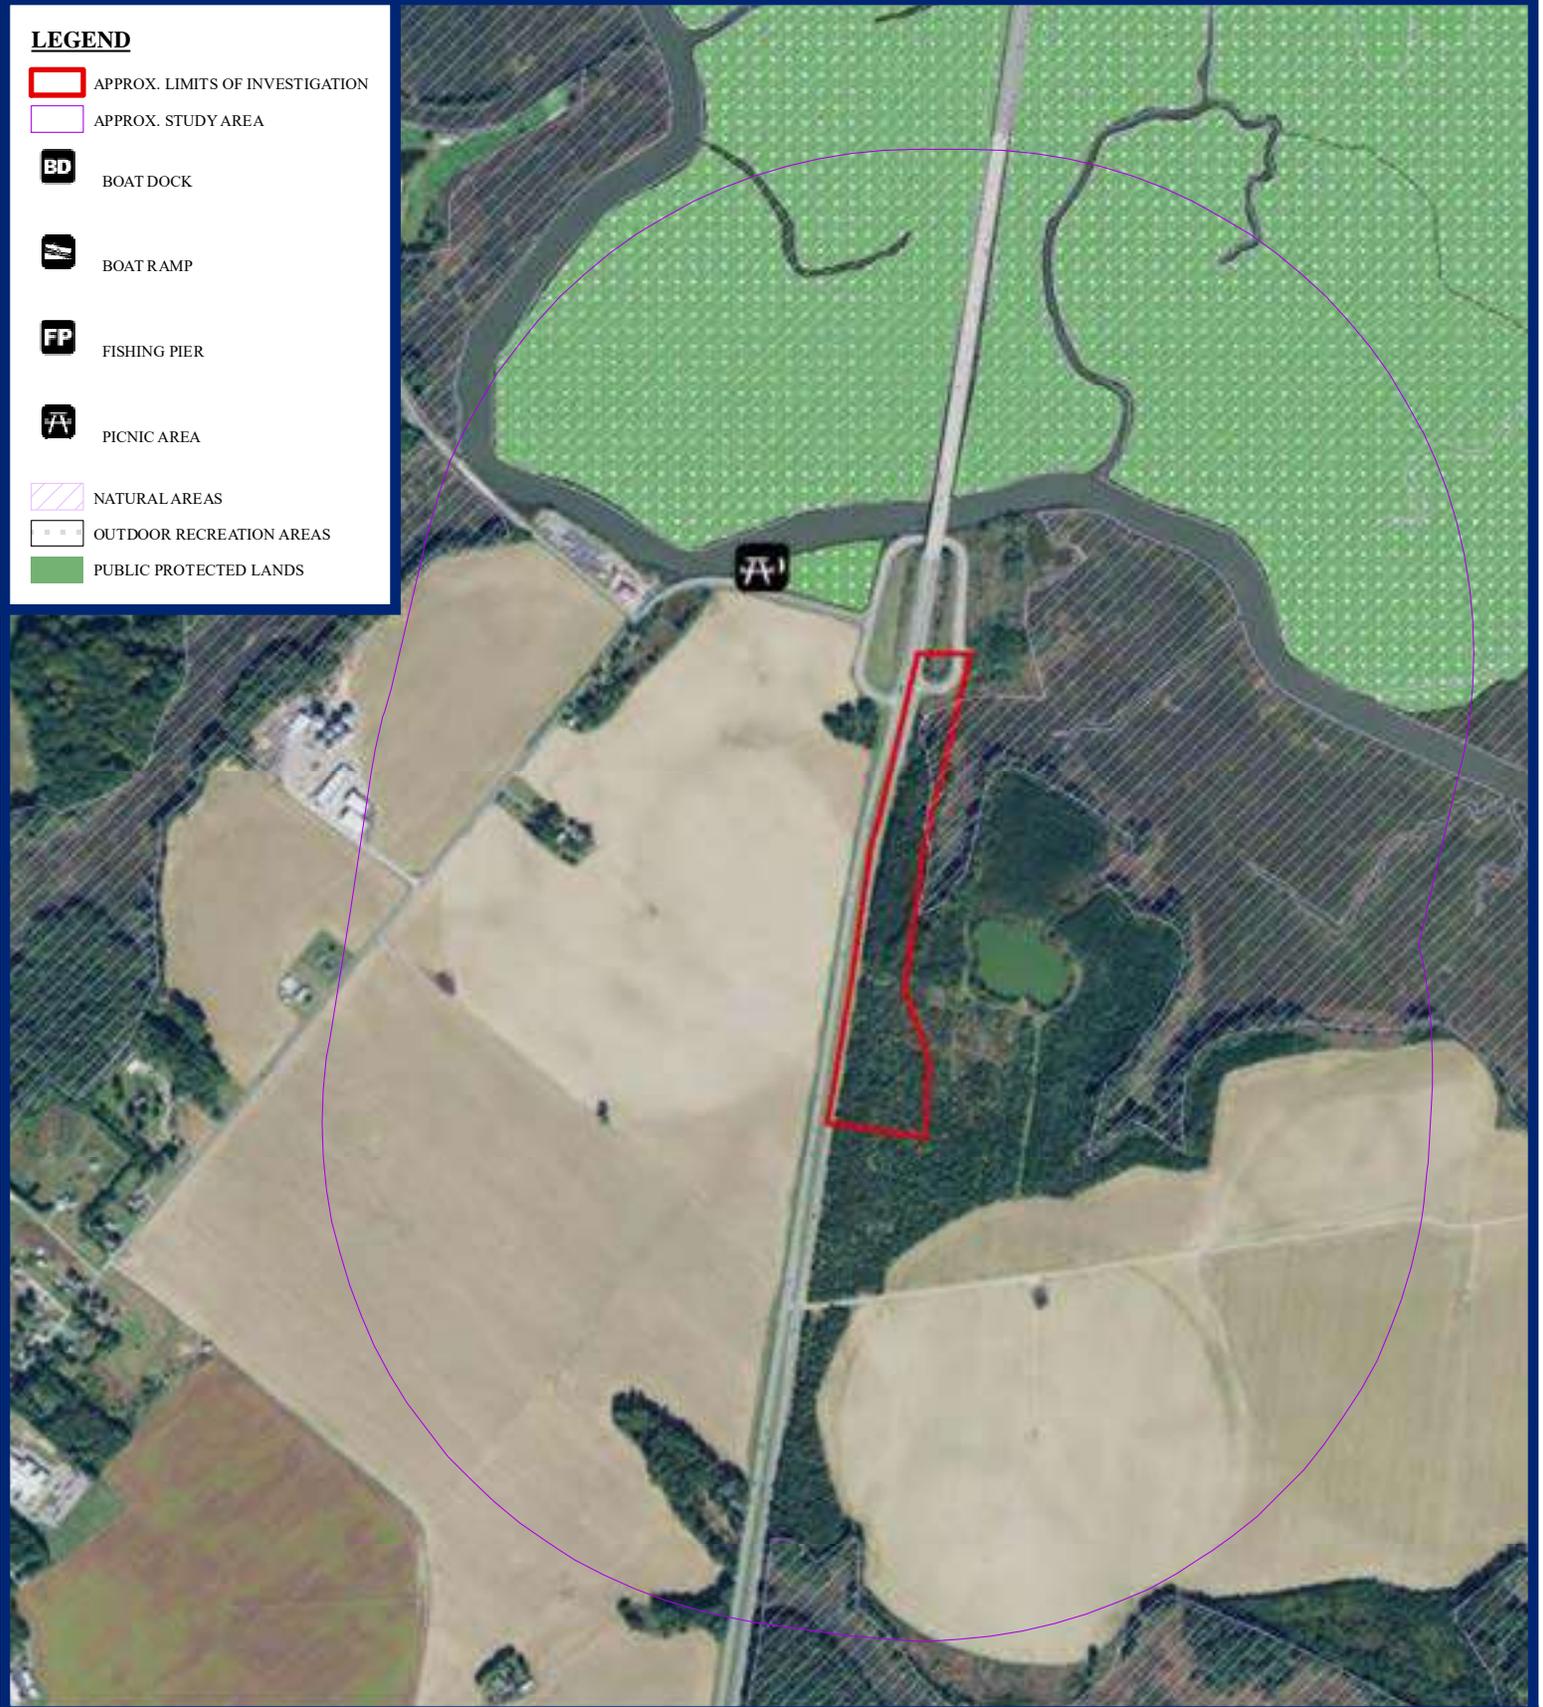

550 Bay Road
Dover, DE 19901
P: 302.734.9188

DELAWARE PROTECTED NATURAL
RESOURCES

SR1-TRAP SHOOTERS INTERCHANGE

KENT COUNTY, DELAWARE


Aerial Imagery Source: NAIP (2021)
FirstMap
ArcGIS Online



1 inch = 1,000 feet

LEGEND

-  STUDY AREA
-  LIMITS OF INVESTIGATION

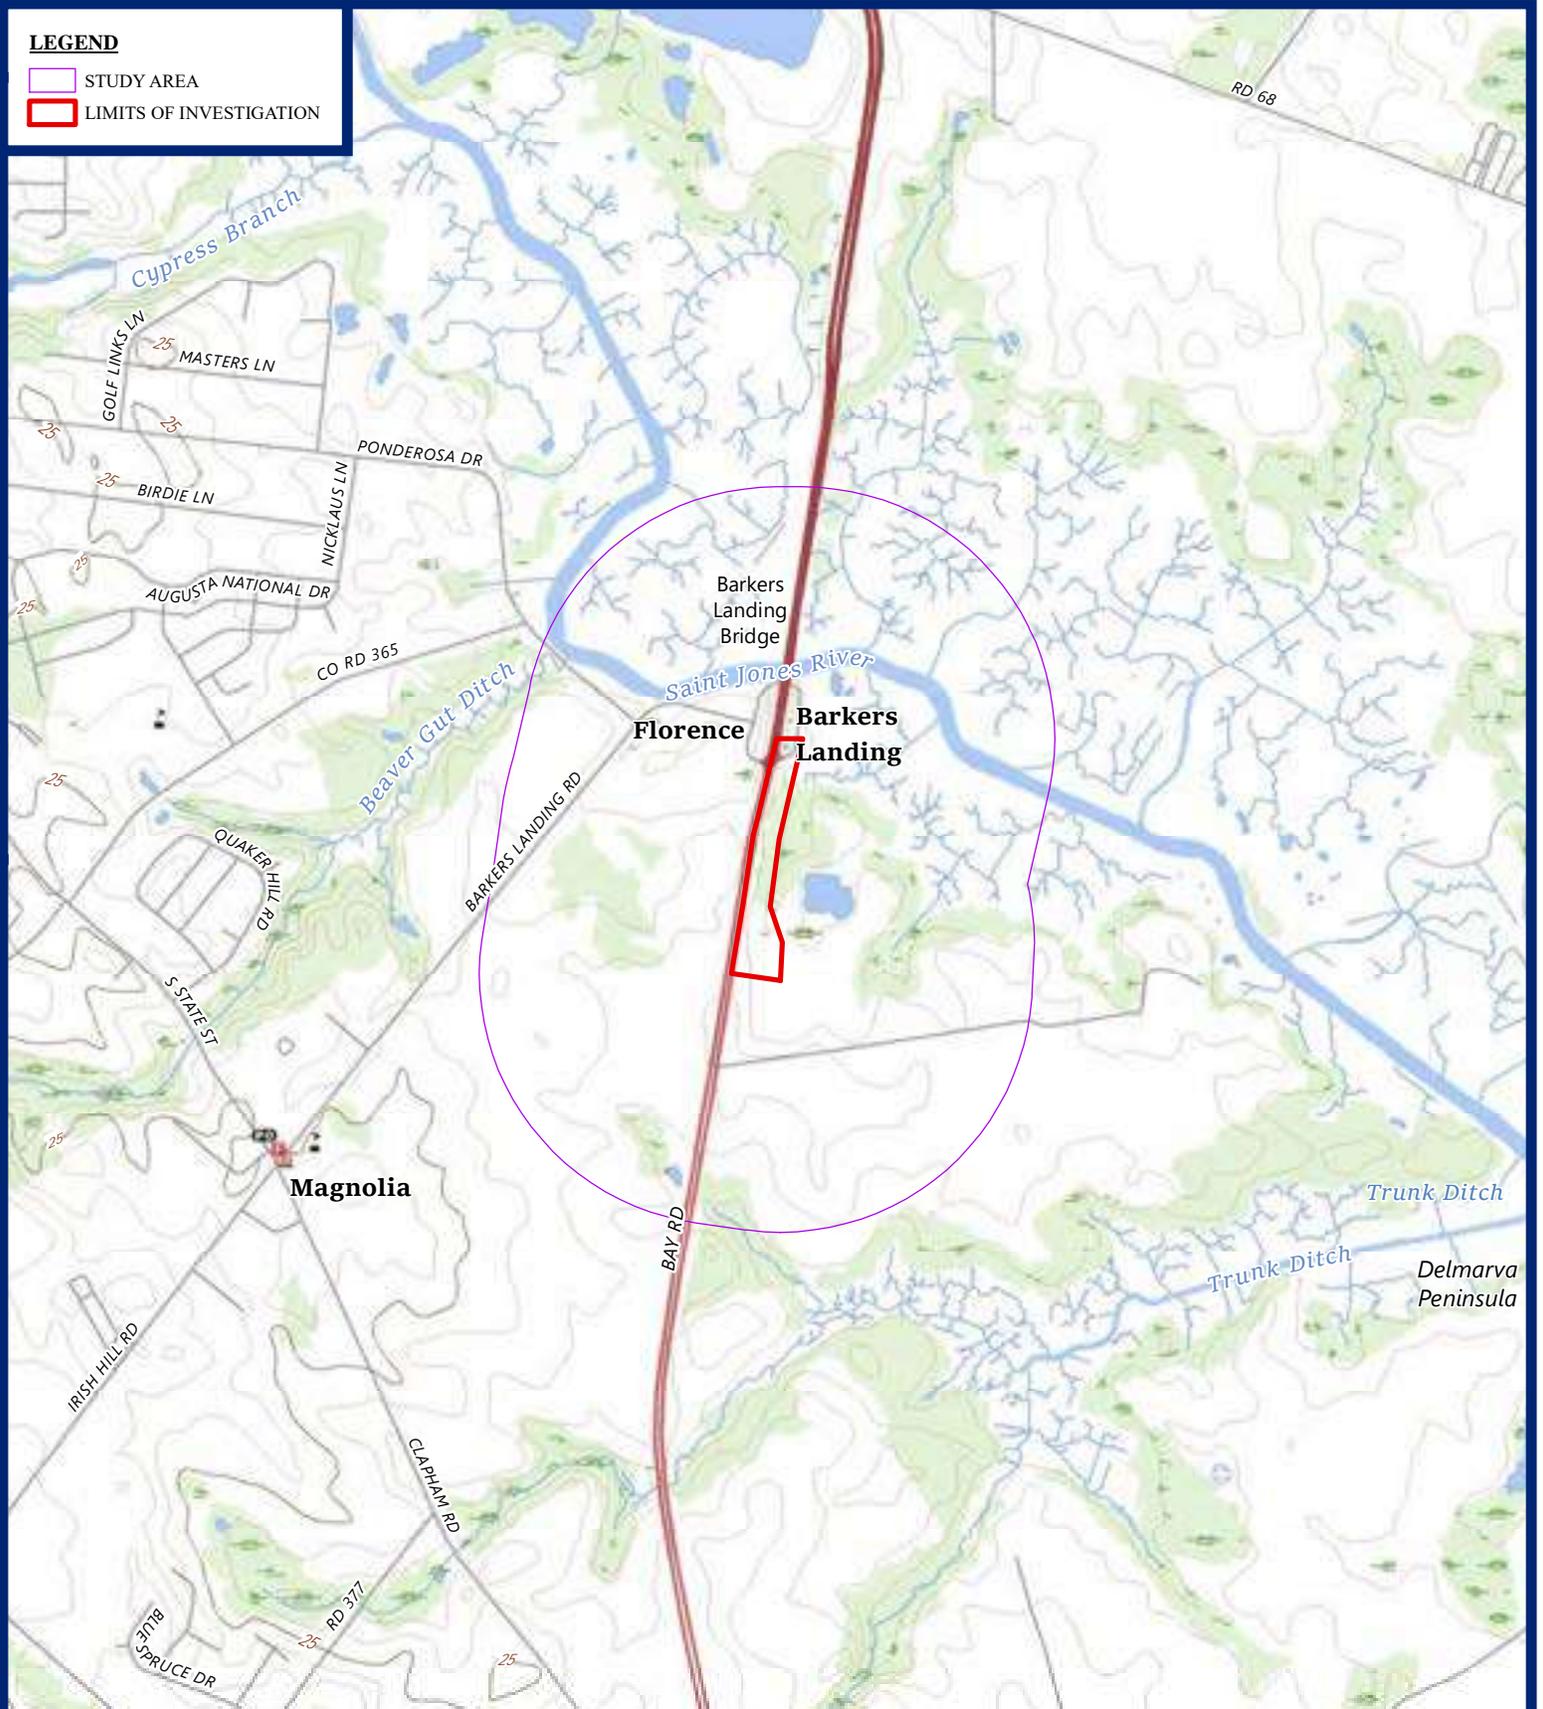

550 Bay Road
Dover, DE 19901
P: 302.734.9188

USGS TOPOGRAPHIC
QUADRANGLE MAP

SR1-TRAP SHOOTERS INTERCHANGE

KENT COUNTY, DELAWARE


USGS Topo Quads:
FREDERICA (DE)

Area: 18.70 +/- AC
Latitude: 39° 04' 51.2"N
Longitude: 75° 27' 28.7"W
Elevation: ~2 - 25 feet
Scale: 1:24,000



LEGEND

-  APPROX. LIMITS OF INVESTIGATION
-  APPROX. STUDY AREA
-  LEAKING UNDERGROUND STORAGE TANKS
-  UNDERGROUND STORAGE TANKS
-  WELLHEAD PROTECTION AREAS
-  NON-PUBLIC WELLS

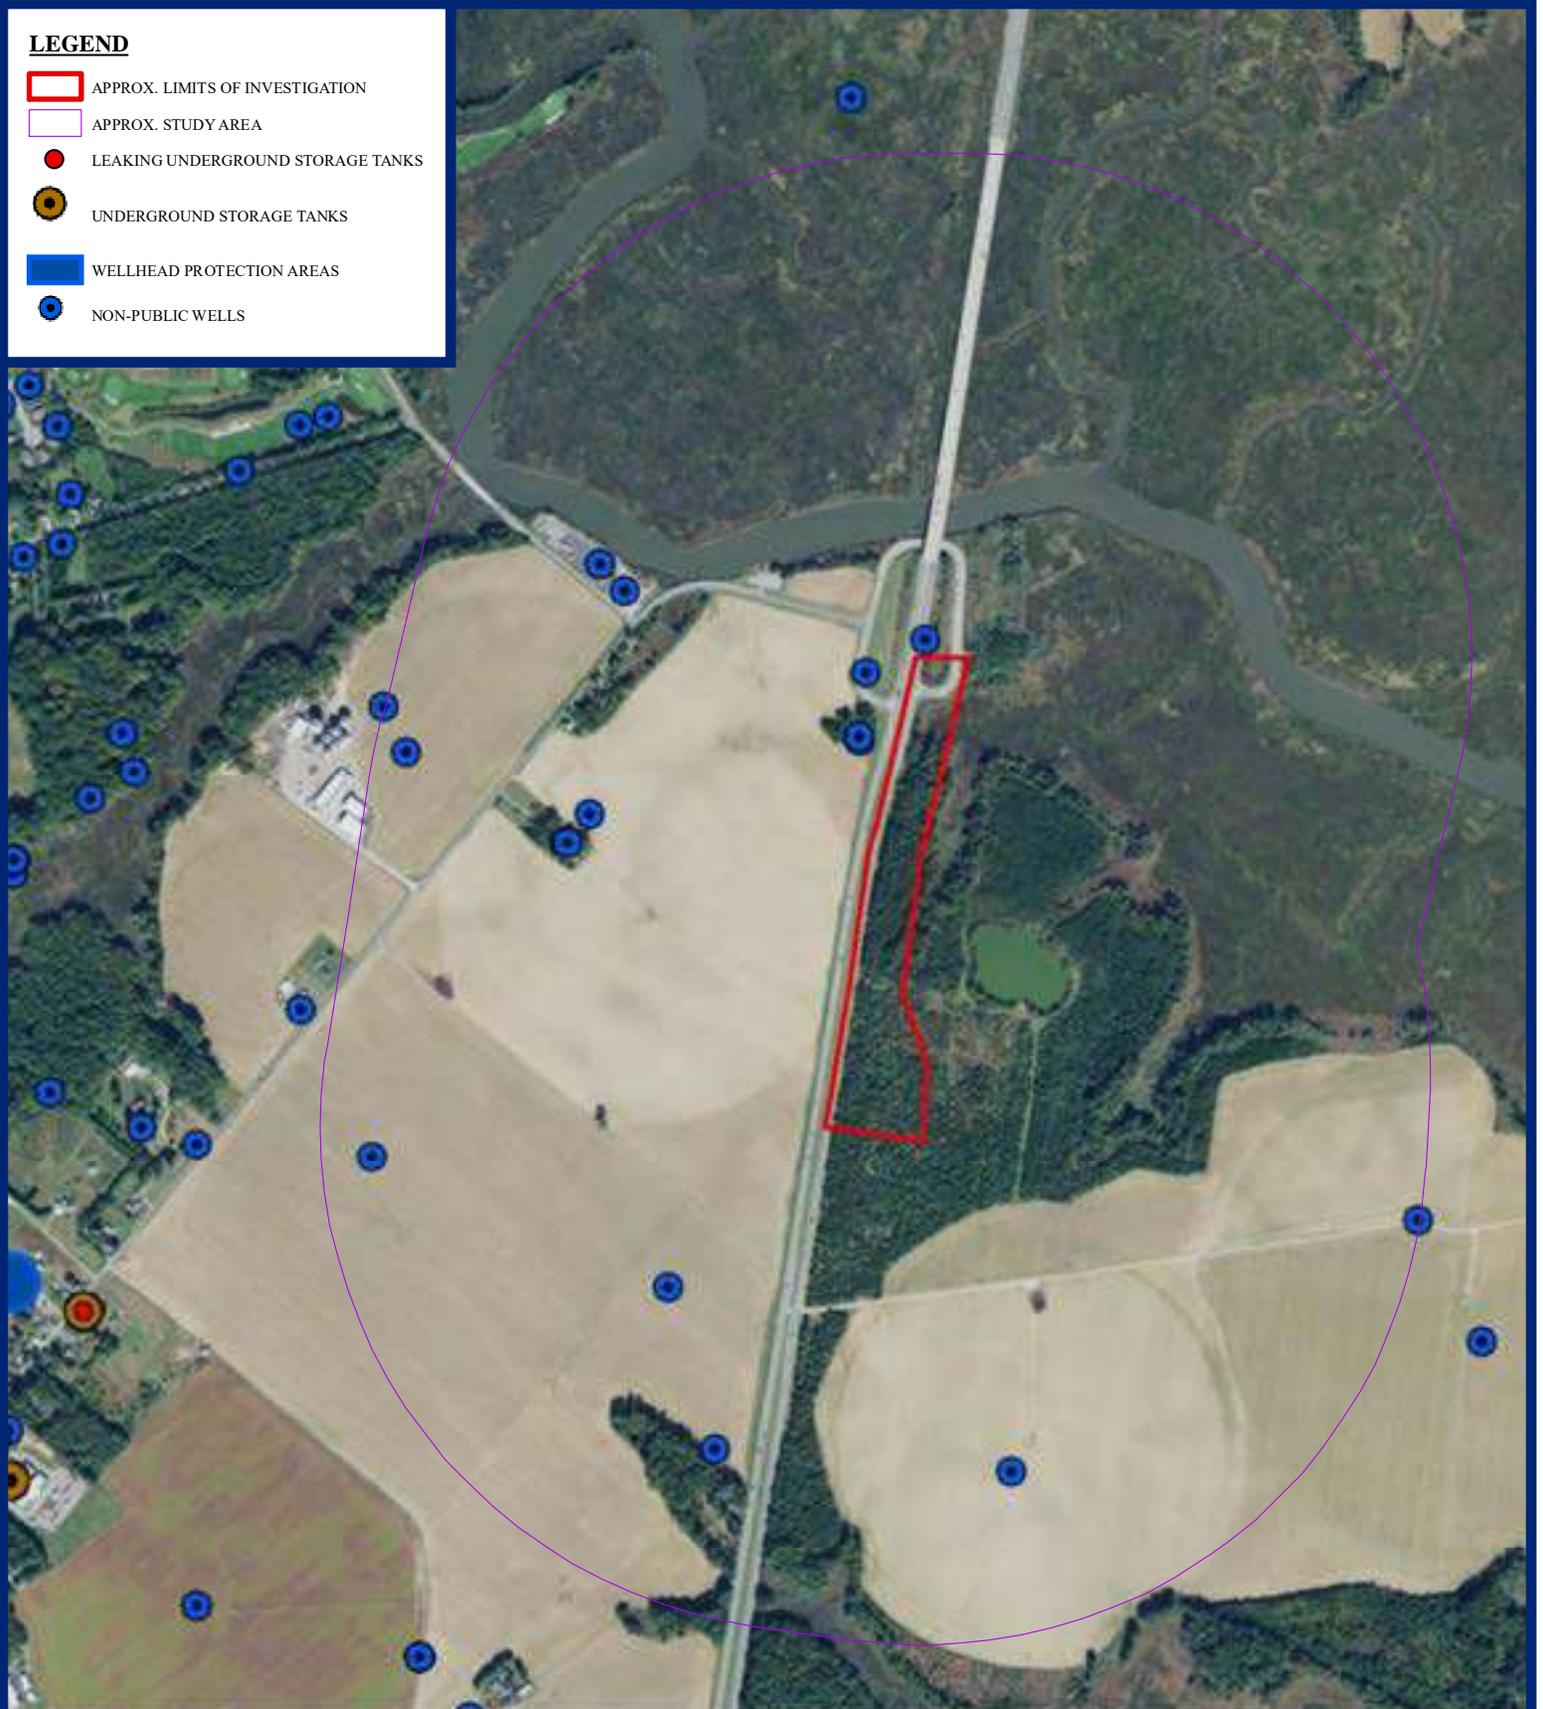

550 Bay Road
Dover, DE 19901
P: 302.734.9188

WELLS, UNDERGROUND TANKS
HAZMAT, BROWNSFIELD, & BIOSOLIDS
SR1-TRAP SHOOTERS INTERCHANGE
KENT COUNTY, DELAWARE

Aerial Imagery Source: NAIP (2021)
FirstMap
ArcGIS Online



1 inch = 1,000 feet

Delaware National Estuarine Research Reserve

St Jones Reserve



DNERR Ownership

<all other values>

Ownership

 Other Protected

 DNERR

 stjones_core

 stjones_buffer


 All Roads

 Major Roads

 State of Delaware

St. Jones Reserve component is about 3,750 acres in designated size, situated along 5.5 miles of medium-salinity tidal river at the lower end of the St. Jones River watershed, with the river discharging into Delaware Bay. The river continues upstream another 5 miles, flowing out of Silver Lake near downtown Dover. The total length of tidal St. Jones River is approximately 10.5 miles.

The St. Jones Reserve component contains 35 parcels of land held by 23 private landowners, the DNERR, and two other state agencies (the Division of Fish and Wildlife and the Division of Historical and Cultural Affairs).

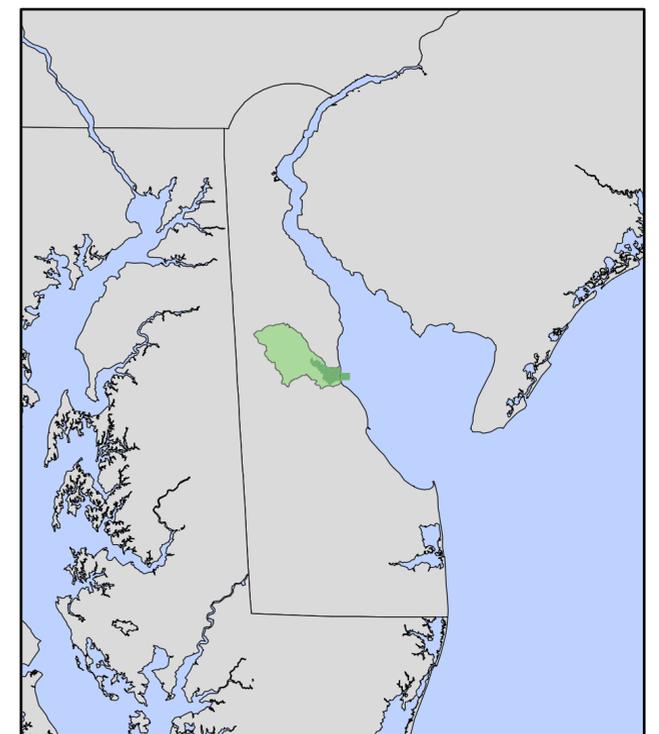

LEGEND


 APPROX. LIMITS OF INVESTIGATION

 APPROX. STUDY AREA

FLOOD ZONE

 AE

 X, 0.2 PCT ANNUAL CHANCE FLOOD HAZARD

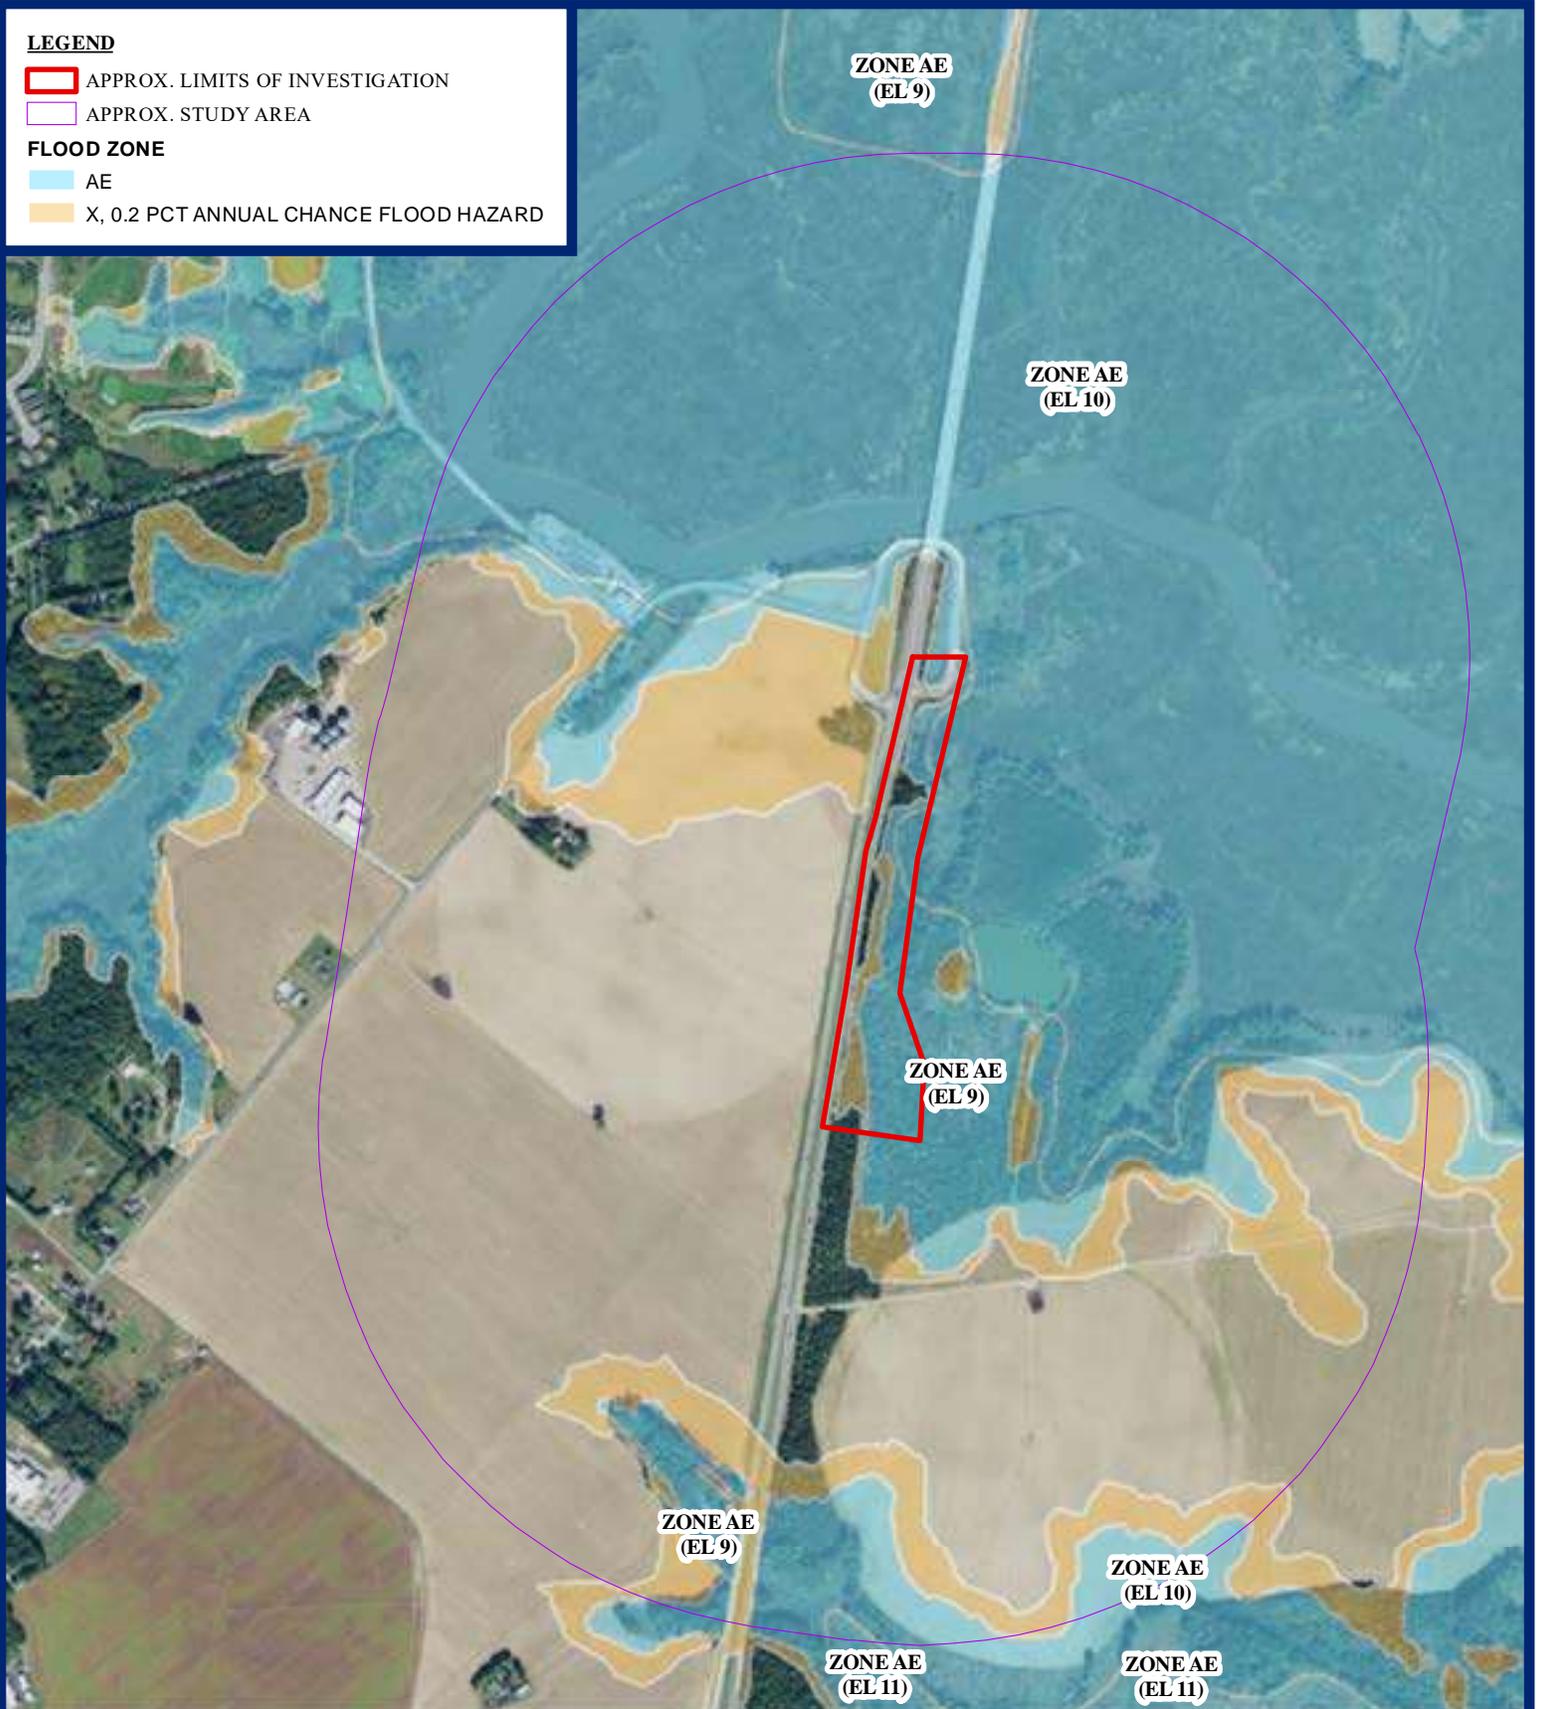

550 Bay Road
Dover, DE 19901
P: 302.734.9188

DELAWARE PROTECTED NATURAL
RESOURCES

SR1-TRAP SHOOTERS INTERCHANGE

KENT COUNTY, DELAWARE

Aerial Imagery Source: NAIP (2021)
FirstMap
ArcGIS Online



1 inch = 1,000 feet



United States Department of the Interior



FISH AND WILDLIFE SERVICE
Chesapeake Bay Ecological Services Field Office
177 Admiral Cochrane Drive
Annapolis, MD 21401-7307
Phone: (410) 573-4599 Fax: (410) 266-9127

In Reply Refer To:
Project Code: 2023-0034660
Project Name: SR1/Trapshooters Interchange

January 17, 2023

Subject: List of threatened and endangered species that may occur in your proposed project location or may be affected by your proposed project

To Whom It May Concern:

The enclosed species list identifies threatened, endangered, proposed and candidate species, as well as proposed and final designated critical habitat, that may occur within the boundary of your proposed project and/or may be affected by your proposed project. The species list fulfills the requirements of the U.S. Fish and Wildlife Service (Service) under section 7(c) of the Endangered Species Act (Act) of 1973, as amended (16 U.S.C. 1531 *et seq.*).

New information based on updated surveys, changes in the abundance and distribution of species, changed habitat conditions, or other factors could change this list. Please feel free to contact us if you need more current information or assistance regarding the potential impacts to federally proposed, listed, and candidate species and federally designated and proposed critical habitat. Please note that under 50 CFR 402.12(e) of the regulations implementing section 7 of the Act, the accuracy of this species list should be verified after 90 days. This verification can be completed formally or informally as desired. The Service recommends that verification be completed by visiting the ECOS-IPaC website at regular intervals during project planning and implementation for updates to species lists and information. An updated list may be requested through the ECOS-IPaC system by completing the same process used to receive the enclosed list.

The purpose of the Act is to provide a means whereby threatened and endangered species and the ecosystems upon which they depend may be conserved. Under sections 7(a)(1) and 7(a)(2) of the Act and its implementing regulations (50 CFR 402 *et seq.*), Federal agencies are required to utilize their authorities to carry out programs for the conservation of threatened and endangered species and to determine whether projects may affect threatened and endangered species and/or designated critical habitat.

A Biological Assessment is required for construction projects (or other undertakings having similar physical impacts) that are major Federal actions significantly affecting the quality of the human environment as defined in the National Environmental Policy Act (42 U.S.C. 4332(2)(c)). For projects other than major construction activities, the Service suggests that a biological

evaluation similar to a Biological Assessment be prepared to determine whether the project may affect listed or proposed species and/or designated or proposed critical habitat. Recommended contents of a Biological Assessment are described at 50 CFR 402.12.

If a Federal agency determines, based on the Biological Assessment or biological evaluation, that listed species and/or designated critical habitat may be affected by the proposed project, the agency is required to consult with the Service pursuant to 50 CFR 402. In addition, the Service recommends that candidate species, proposed species and proposed critical habitat be addressed within the consultation. More information on the regulations and procedures for section 7 consultation, including the role of permit or license applicants, can be found in the "Endangered Species Consultation Handbook" at:

<http://www.fws.gov/endangered/esa-library/pdf/TOC-GLOS.PDF>

Migratory Birds: In addition to responsibilities to protect threatened and endangered species under the Endangered Species Act (ESA), there are additional responsibilities under the Migratory Bird Treaty Act (MBTA) and the Bald and Golden Eagle Protection Act (BGEPA) to protect native birds from project-related impacts. Any activity, intentional or unintentional, resulting in take of migratory birds, including eagles, is prohibited unless otherwise permitted by the U.S. Fish and Wildlife Service (50 C.F.R. Sec. 10.12 and 16 U.S.C. Sec. 668(a)). For more information regarding these Acts see <https://www.fws.gov/birds/policies-and-regulations.php>.

The MBTA has no provision for allowing take of migratory birds that may be unintentionally killed or injured by otherwise lawful activities. It is the responsibility of the project proponent to comply with these Acts by identifying potential impacts to migratory birds and eagles within applicable NEPA documents (when there is a federal nexus) or a Bird/Eagle Conservation Plan (when there is no federal nexus). Proponents should implement conservation measures to avoid or minimize the production of project-related stressors or minimize the exposure of birds and their resources to the project-related stressors. For more information on avian stressors and recommended conservation measures see <https://www.fws.gov/birds/bird-enthusiasts/threats-to-birds.php>.

In addition to MBTA and BGEPA, Executive Order 13186: *Responsibilities of Federal Agencies to Protect Migratory Birds*, obligates all Federal agencies that engage in or authorize activities that might affect migratory birds, to minimize those effects and encourage conservation measures that will improve bird populations. Executive Order 13186 provides for the protection of both migratory birds and migratory bird habitat. For information regarding the implementation of Executive Order 13186, please visit <https://www.fws.gov/birds/policies-and-regulations/executive-orders/e0-13186.php>.

We appreciate your concern for threatened and endangered species. The Service encourages Federal agencies to include conservation of threatened and endangered species into their project planning to further the purposes of the Act. Please include the Consultation Code in the header of this letter with any request for consultation or correspondence about your project that you submit to our office.

Attachment(s):

- Official Species List

Official Species List

This list is provided pursuant to Section 7 of the Endangered Species Act, and fulfills the requirement for Federal agencies to "request of the Secretary of the Interior information whether any species which is listed or proposed to be listed may be present in the area of a proposed action".

This species list is provided by:

Chesapeake Bay Ecological Services Field Office

177 Admiral Cochrane Drive

Annapolis, MD 21401-7307

(410) 573-4599

Project Summary

Project Code: 2023-0034660
Project Name: SR1/Trapshooters Interchange
Project Type: Road/Hwy - New Construction
Project Description: DelDOT is proposing a study of the present intersection of Trapshooters Road at SR 1 (pp 59 of 2017 MTP). With continued development in the Magnolia area, this Grade Separated Intersection has become an increasing cause of congestion as vehicles enter SR 1 northbound from a full stop.. This study should evaluate moving the Trapshooters Road entrance for the northbound lane, along with the exit ramp, south to accommodate a deceleration lane to exit and a merge lane which can safely manage the current and projected future volume of traffic. The study should look at a type of scenario that minimizes acquisition of additional right-of-way to limit impact on the sensitive environmental features in the area.

Project Location:

Approximate location of the project can be viewed in Google Maps: <https://www.google.com/maps/@39.08017585,-75.45808710238263,14z>



Counties: Kent County, Delaware

Endangered Species Act Species

There is a total of 2 threatened, endangered, or candidate species on this species list.

Species on this list should be considered in an effects analysis for your project and could include species that exist in another geographic area. For example, certain fish may appear on the species list because a project could affect downstream species. Note that 2 of these species should be considered only under certain conditions.

IPaC does not display listed species or critical habitats under the sole jurisdiction of NOAA Fisheries¹, as USFWS does not have the authority to speak on behalf of NOAA and the Department of Commerce.

See the "Critical habitats" section below for those critical habitats that lie wholly or partially within your project area under this office's jurisdiction. Please contact the designated FWS office if you have questions.

-
1. [NOAA Fisheries](#), also known as the National Marine Fisheries Service (NMFS), is an office of the National Oceanic and Atmospheric Administration within the Department of Commerce.

Birds

NAME	STATUS
Eastern Black Rail <i>Laterallus jamaicensis ssp. jamaicensis</i> No critical habitat has been designated for this species. This species only needs to be considered under the following conditions: <ul style="list-style-type: none"> ▪ Potential habitat for Black Rail exists in this area. Species profile: https://ecos.fws.gov/ecp/species/10477	Threatened

Insects

NAME	STATUS
Monarch Butterfly <i>Danaus plexippus</i> No critical habitat has been designated for this species. This species only needs to be considered under the following conditions: <ul style="list-style-type: none"> ▪ The monarch is a candidate species and not yet listed or proposed for listing. There are generally no section 7 requirements for candidate species (FAQ found here: https://www.fws.gov/savethemonarch/FAQ-Section7.html). Species profile: https://ecos.fws.gov/ecp/species/9743	Candidate

Critical habitats

THERE ARE NO CRITICAL HABITATS WITHIN YOUR PROJECT AREA UNDER THIS OFFICE'S JURISDICTION.

IPaC User Contact Information

Agency: Delaware Department of Transportation
Name: TJ Austin
Address: 550 BAY ROAD
City: DOVER
State: DE
Zip: 19901
Email: tjaustin@kleinfelder.com
Phone: 3027349188

Lead Agency Contact Information

Lead Agency: Federal Highway Administration

SR1 and Trap Shooters Road Interchange

Appendix B: Demographics Reports



Location: User-specified point center at 39.081922, -75.457353

Ring (buffer): 1-miles radius

Description:

Summary	Census 2010
Population	361
Population Density (per sq. mile)	121
People of Color Population	107
% People of Color Population	30%
Households	134
Housing Units	142
Land Area (sq. miles)	2.98
% Land Area	99%
Water Area (sq. miles)	0.02
% Water Area	1%

Population by Race	Number	Percent
Total	361	-----
Population Reporting One Race	347	96%
White	262	72%
Black	71	20%
American Indian	2	1%
Asian	8	2%
Pacific Islander	0	0%
Some Other Race	4	1%
Population Reporting Two or More Races	14	4%
Total Hispanic Population	17	5%
Total Non-Hispanic Population	344	95%
White Alone	254	70%
Black Alone	69	19%
American Indian Alone	2	1%
Non-Hispanic Asian Alone	8	2%
Pacific Islander Alone	0	0%
Other Race Alone	0	0%
Two or More Races Alone	11	3%

Population by Sex	Number	Percent
Male	179	49%
Female	182	51%

Population by Age	Number	Percent
Age 0-4	25	7%
Age 0-17	100	28%
Age 18+	261	72%
Age 65+	36	10%

Households by Tenure	Number	Percent
Total	134	
Owner Occupied	112	83%
Renter Occupied	22	17%

Data Note: Detail may not sum to totals due to rounding. Hispanic population can be of any race.

Source: U.S. Census Bureau, Census 2010 Summary File 1.

EJScreen Report (Version 2.1)




1 mile Ring Centered at 39.081922,-75.457353, DELAWARE, EPA Region 3

Approximate Population: 399

Input Area (sq. miles): 3.14

Selected Variables	State Percentile	USA Percentile
Environmental Justice Indexes		
EJ Index for Particulate Matter 2.5	42	22
EJ Index for Ozone	66	65
EJ Index for Diesel Particulate Matter*	39	39
EJ Index for Air Toxics Cancer Risk*	0	31
EJ Index for Air Toxics Respiratory HI*	57	45
EJ Index for Traffic Proximity	36	40
EJ Index for Lead Paint	60	52
EJ Index for Superfund Proximity	51	72
EJ Index for RMP Facility Proximity	20	29
EJ Index for Hazardous Waste Proximity	37	40
EJ Index for Underground Storage Tanks	41	47
EJ Index for Wastewater Discharge	0	0

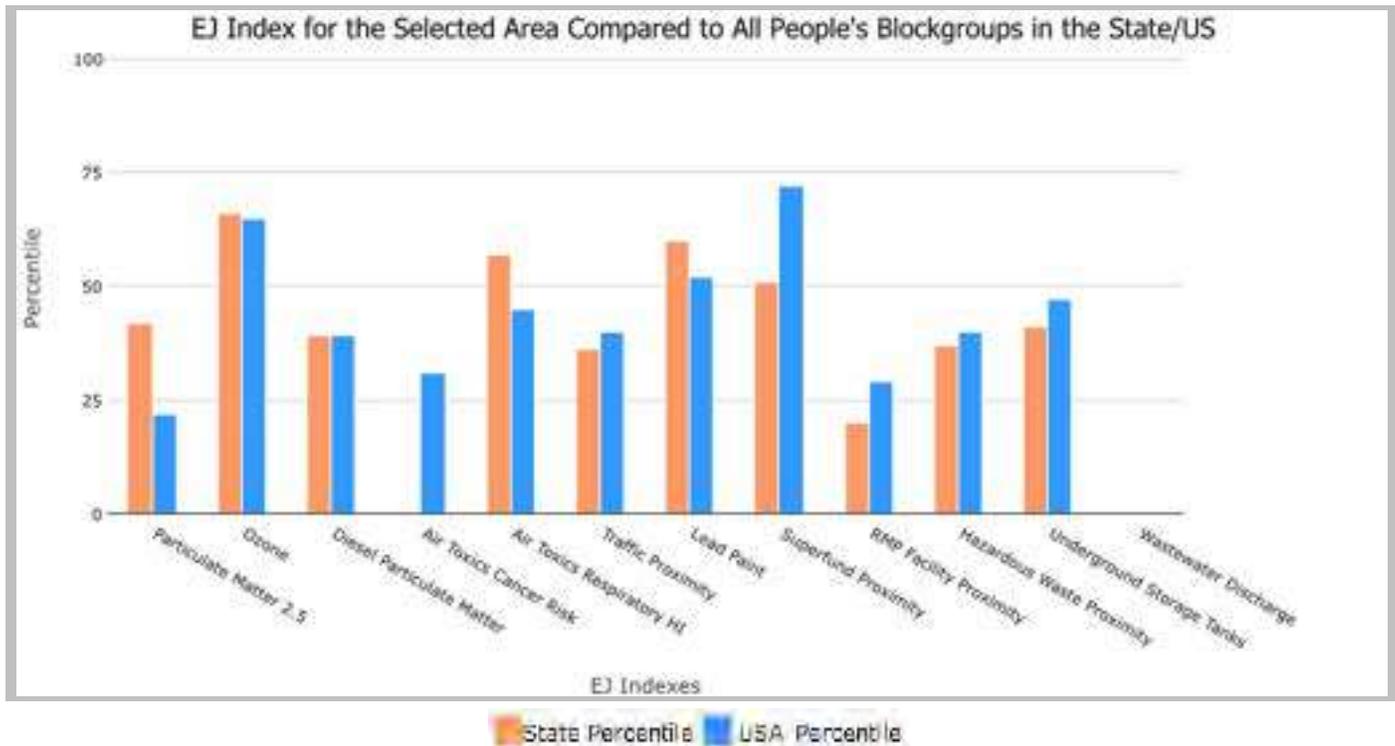

This report shows the values for environmental and demographic indicators and EJSCREEN indexes. It shows environmental and demographic raw data (e.g., the estimated concentration of ozone in the air), and also shows what percentile each raw data value represents. These percentiles provide perspective on how the selected block group or buffer area compares to the entire state, EPA region, or nation. For example, if a given location is at the 95th percentile nationwide, this means that only 5 percent of the US population has a higher block group value than the average person in the location being analyzed. The years for which the data are available, and the methods used, vary across these indicators. Important caveats and uncertainties apply to this screening-level information, so it is essential to understand the limitations on appropriate interpretations and applications of these indicators. Please see EJSCREEN documentation for discussion of these issues before using reports.

EJScreen Report (Version 2.1)



1 mile Ring Centered at 39.081922,-75.457353, DELAWARE, EPA Region 3

Approximate Population: 399

Input Area (sq. miles): 3.14

Selected Variables	Value	State Avg.	%ile in State	USA Avg.	%ile in USA
Pollution and Sources					
Particulate Matter 2.5 ($\mu\text{g}/\text{m}^3$)	7.01	7.82	31	8.67	13
Ozone (ppb)	43.1	42.7	76	42.5	59
Diesel Particulate Matter* ($\mu\text{g}/\text{m}^3$)	0.145	0.252	25	0.294	<50th
Air Toxics Cancer Risk* (lifetime risk per million)	20	26	0	28	<50th
Air Toxics Respiratory HI*	0.3	0.29	80	0.36	<50th
Traffic Proximity (daily traffic count/distance to road)	78	640	22	760	30
Lead Paint (% Pre-1960 Housing)	0.17	0.23	53	0.27	44
Superfund Proximity (site count/km distance)	0.17	0.33	42	0.13	81
RMP Facility Proximity (facility count/km distance)	0.1	0.56	9	0.77	17
Hazardous Waste Proximity (facility count/km distance)	0.17	1.9	23	2.2	29
Underground Storage Tanks (count/km ²)	0.21	2.3	27	3.9	32
Wastewater Discharge (toxicity-weighted concentration/m distance)	0	1.7	0	12	0
Socioeconomic Indicators					
Demographic Index	30%	31%	55	35%	52
People of Color	28%	38%	46	40%	49
Low Income	32%	26%	69	30%	57
Unemployment Rate	7%	6%	68	5%	70
Limited English Speaking Households	2%	2%	67	5%	62
Less Than High School Education	5%	9%	42	12%	37
Under Age 5	6%	6%	60	6%	56
Over Age 64	17%	19%	50	16%	57

*Diesel particulate matter, air toxics cancer risk, and air toxics respiratory hazard index are from the EPA's Air Toxics Data Update, which is the Agency's ongoing, comprehensive evaluation of air toxics in the United States. This effort aims to prioritize air toxics, emission sources, and locations of interest for further study. It is important to remember that the air toxics data presented here provide broad estimates of health risks over geographic areas of the country, not definitive risks to specific individuals or locations. Cancer risks and hazard indices from the Air Toxics Data Update are reported to one significant figure and any additional significant figures here are due to rounding. More information on the Air Toxics Data Update can be found at: <https://www.epa.gov/haps/air-toxics-data-update>.

For additional information, see: www.epa.gov/environmentaljustice

EJScreen is a screening tool for pre-decisional use only. It can help identify areas that may warrant additional consideration, analysis, or outreach. It does not provide a basis for decision-making, but it may help identify potential areas of EJ concern. Users should keep in mind that screening tools are subject to substantial uncertainty in their demographic and environmental data, particularly when looking at small geographic areas. Important caveats and uncertainties apply to this screening-level information, so it is essential to understand the limitations on appropriate interpretations and applications of these indicators. Please see EJScreen documentation for discussion of these issues before using reports. This screening tool does not provide data on every environmental impact and demographic factor that may be relevant to a particular location. EJScreen outputs should be supplemented with additional information and local knowledge before taking any action to address potential EJ concerns.

SR1 and Trap Shooters Road Interchange

Appendix C: Traffic Analysis

Introduction

The Trap shooters Road ramps to SR1 are limited by the St. Jones River bridge and topography of the land adjacent to the highway. SR1 has a posted speed of 55 MPH within the project limits. No acceleration lane exists for the northbound entrance ramp due to this limitation, therefore vehicles from Trap Shooters Road enter from a complete stop condition. During high northbound SR1 (NB SR1) traffic volume periods, these entering vehicles have to wait for unacceptably long durations for rare gaps in the NB SR1 traffic stream that are adequate enough to allow for acceleration to the highway speed to avert crashes. These conditions create a high probability for potentially dangerous operating conditions. This existing conditions traffic study is a component of the study that has proposed to evaluate the feasibility of moving the existing NB SR1 entrance and exit ramps further south in order to accommodate an acceleration lane for the entrance ramp and a compliant deceleration lane for the exit ramp.

Existing Traffic Volumes

Intersections within the study limits are as follows:

1. Barkers Landing Road at Trap Shooters Road
2. Southbound SR1 (SB SR1) at Trap Shooters Road
3. NB SR1 at Trap Shooters Road.

A combination of turning movement counts performed in October and November of 2022, and traffic data for the same periods from existing Wavetronix devices along SR1 located north and south of the intersections were used to obtain the turning movement volumes for non-summer /regular weekday A.M., midday, P.M. and Saturday peak hour turning movement volumes presented in **Figure 1**. Traffic data for the summer Saturday peak hours presented in **Figure 2** were obtained from the Wavetronix devices. A separate counts of trucks / heavy vehicles were also collected for all the various peak hours for the traffic operational analysis.

Future Traffic Volumes

Opening Year 2028 and design year 2050 traffic volumes presented in **Figure 3** and **Figure 4** were generated by DelDOT Planning based on the existing traffic volumes submitted. The Delmarva Peninsula Travel Demand Model (TDM) was used in the development of the future traffic forecast. Summer Saturday traffic forecast was not included in the data received; therefore, Century used the growth factor computed from based on the ratio of the non-summer Saturday forecasts to the existing Saturday traffic volumes. The Opening Year 2028 and design year 2050 Summer Saturday traffic volumes so generated are shown in **Figure 5** and **Figure 6**.

Figure 1: 2022 Non-Summer Peak Hour Turning Movement Traffic Volumes

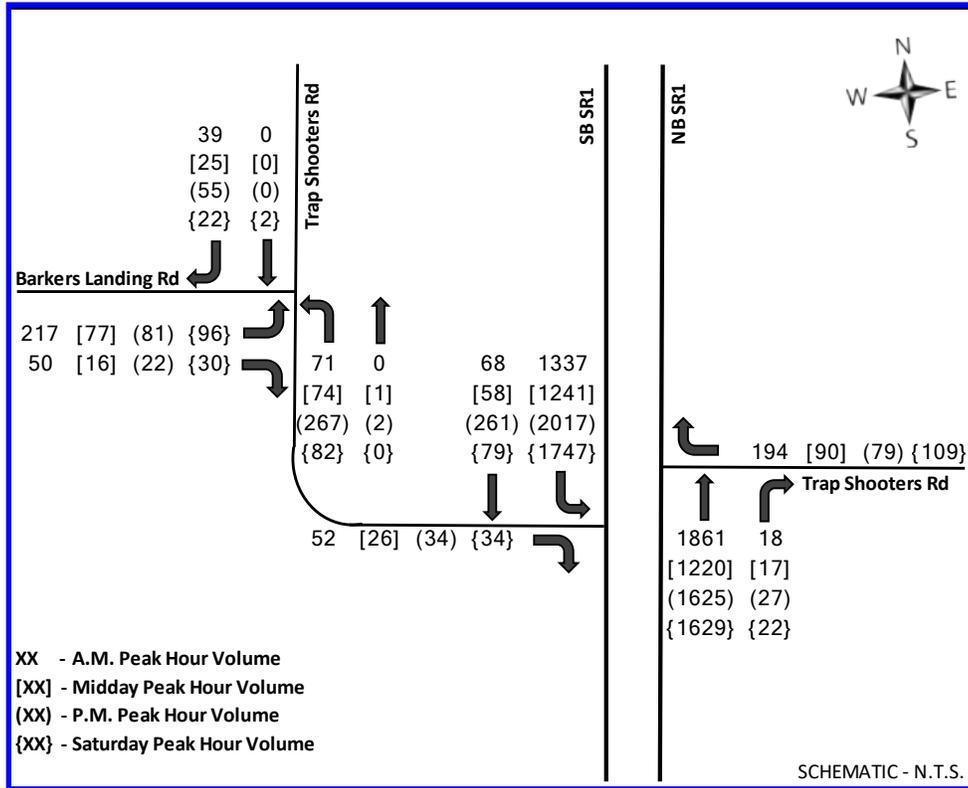


Figure 2: 2022 Summer Saturday Peak Hour Turning Movement Traffic Volumes

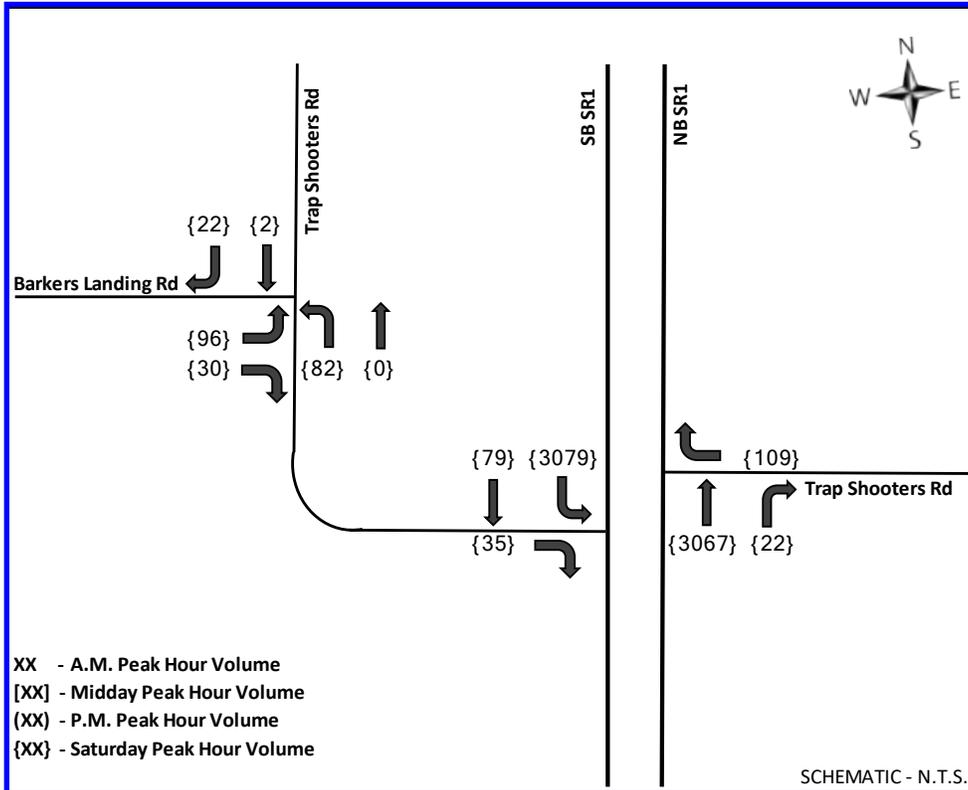


Figure 3: 2028 Non-Summer Peak Hour Turning Movement Traffic Volumes

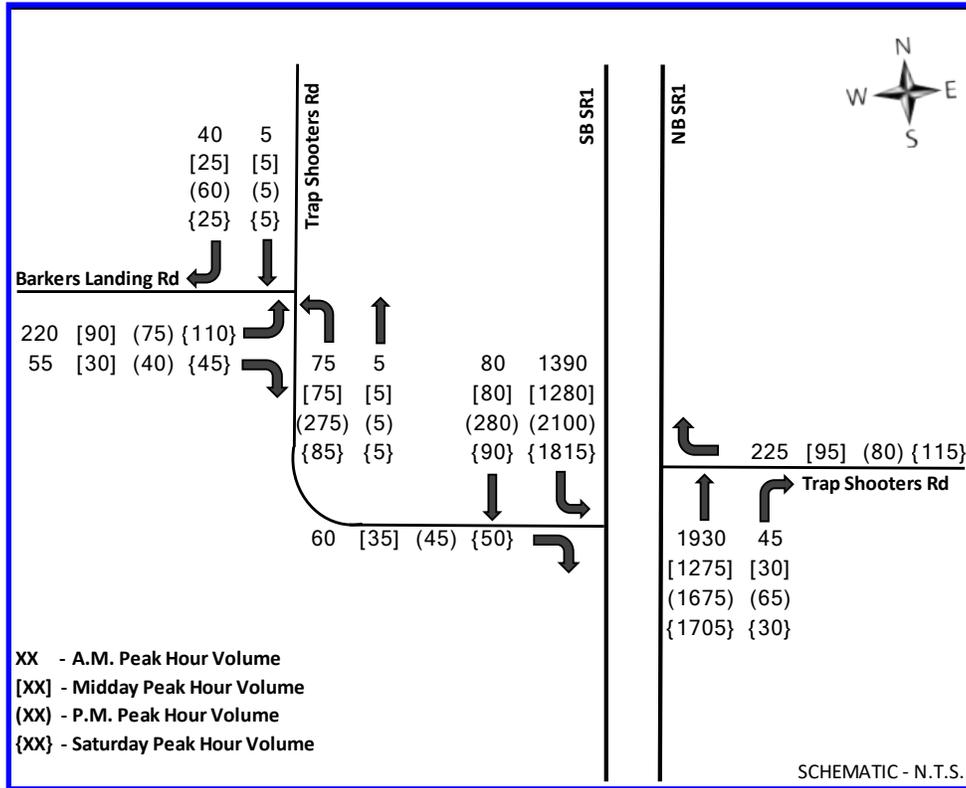


Figure 4: 2050 Non-Summer Peak Hour Turning Movement Traffic Volumes

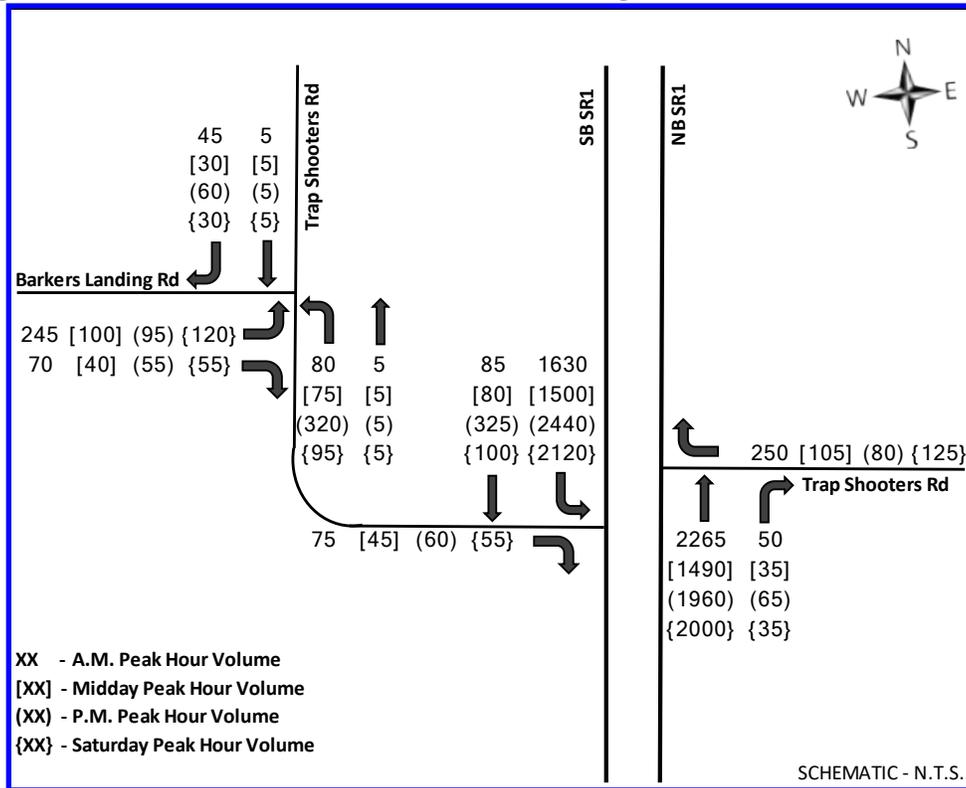


Figure 5: 2028 Summer Saturday Peak Hour Turning Movement Traffic Volumes


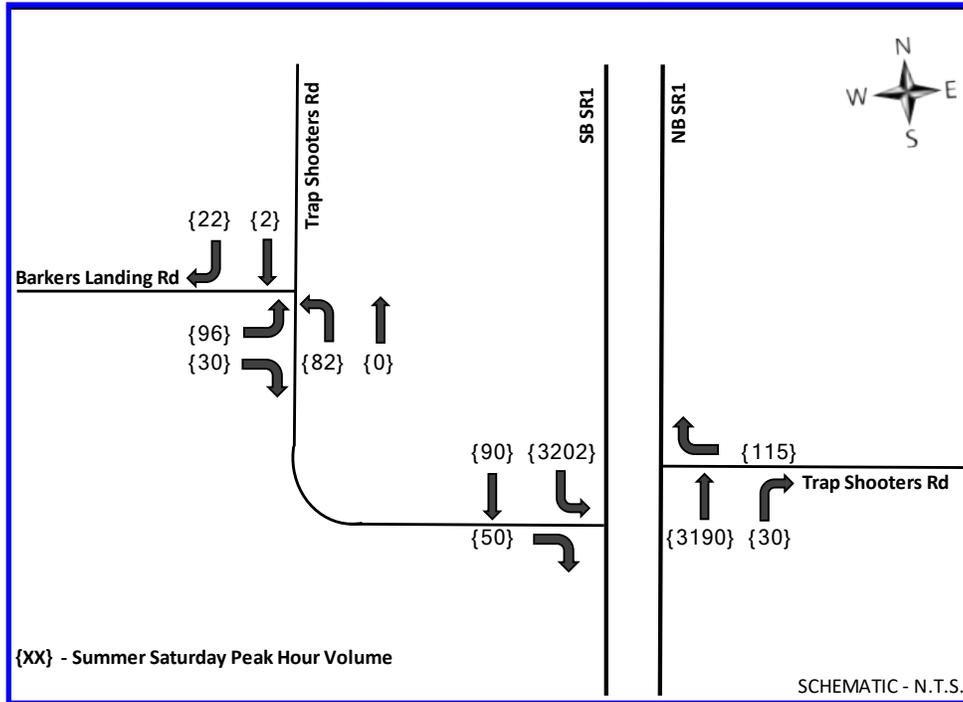


Figure 6: 2050 Summer Saturday Peak Hour Turning Movement Traffic Volumes

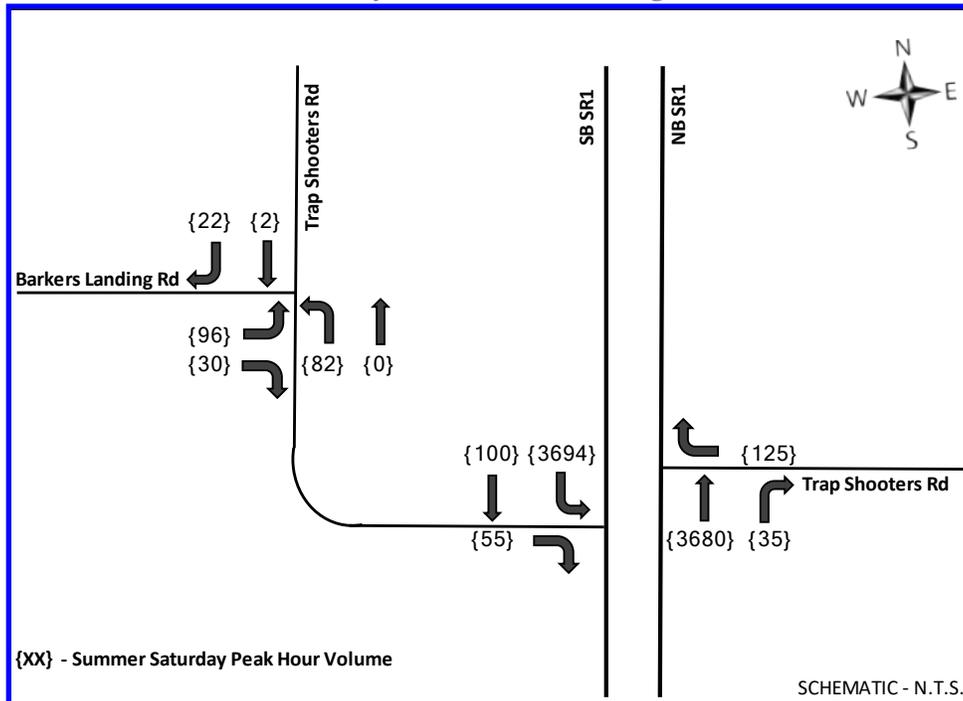

Traffic Operational Analysis

Existing Geometric and Traffic Conditions

The intersection of NB SR1 at Trap Shooters Road is comprised of an exit and entrance ramp on a limited access facility, however, due to the stop-controlled condition and absence of an acceleration lane for the entrance ramp, the intersection operates essentially as a stop-controlled T-intersection. It was therefore analyzed as two-way stop controlled (TWSC) intersection. While the entrance ramp for SB SR1 has an acceleration lane, the entering traffic is controlled by a yield sign, making the eastbound movement operate like a channelized right-turn at a controlled intersection. The intersection of SB SR1 at Trap Shooters Road was therefore analyzed as such.

HCS Software Version 2022 which utilizes the methodologies of the current Highway Capacity Manual (HCM) Version 7 was used for the traffic operational analysis within the project limits. The measures of effectiveness presented for the existing conditions analysis are average control delay measured in seconds per vehicle, Level of service (LOS) and 95th percentile queues in feet. Per the HCM methodology, for TWSC intersections, no measures of effectiveness are provided for the free movements and approaches, and an overall intersection LOS is not defined either. The LOS criteria for unsignalized analysis are presented in **Table 1**.

As provided in the table, LOS F is defined by delay greater than 50 seconds per vehicle and or volume-to-capacity ratio (V/C) greater than one (1), irrespective of control delay value. The operational analysis results for the three existing study intersections are presented in **Table 2**, **Table 3** and **Table 4**.

Table 1: LOS Criteria for TWSC Intersections

Control Delay (Seconds per Vehicle)	LOS by V/C Ratio	
	V/C ≤ 1.0	V/C > 1.0
0 to 10	A	F
>10 to 15	B	F
>15 to 25	C	F
>25 to 35	D	F
>35 to 50	E	F
>50	F	F

Table 2: Barkers Landing at Trap Shooters Road MOE

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	NBL Trap Shooters Rd	7.5	A	5	7.5	A	5	7.9	A	18	7.4	A	5	7.4	A	5
	EB L/R Barkers Landing Rd	11.9	B	40	10.3	B	13	16.5	C	28	10.5	B	18	10.5	B	18

Table 3: SB SR1 at Trap Shooters Road MOE

SR1, Trap Shooters Roads Study
Traffic Report

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	EBR Trap Shooters Rd	17.4	C	15	16.4	C	8	27.6	D	15	21.5	C	13	93.5	F	53

Table 4: SB SR1 at Trap Shooters Road MOE

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	WBR Trap Shooters Rd	87.6	F	198	16.9	C	23	27.1	D	38	35.6	E	70	301.4	F	213

As provided in Table 2, per the analysis, under current traffic and geometric conditions, Trap Shooters Road northbound left-turn movement and the stop-controlled Barkers Landing Road eastbound movements / approach operates at satisfactory LOS C or better for all the non-summer and summer Saturday peak hours analyzed. The highest control delay of 16.5 seconds per vehicle is experienced by the Barkers Landing Road eastbound approach during the non-summer weekday P.M. peak hour.

Per the analysis, under current traffic and geometric conditions, at the intersection of SB SR1 and Trap Shooters Road, the eastbound yield controlled right-turn movement operates at satisfactory LOS D or better for all the non-summer peak hour periods analyzed with the worst delay of 27.1 seconds per vehicle experienced during the weekday P.M. peak hour as given in **Table 3**. Under existing summer traffic conditions, the Trap Shooter’s Road eastbound right-turn movement operates at LOS F with average control delay of 93.5 seconds per vehicle.

As shown in Table 4, under current traffic and geometric conditions, per the analysis, Trap Shooters Road westbound movement / approach operates at satisfactory LOS C with 16.9 seconds average control delay, and LOS D with 27.1 seconds average control delay respectively for the non-summer midday and P.M. peak hours. The Trap Shooters Road westbound movement / approach operates at unsatisfactory LOS E with 35.6 seconds average control delay for the non-summer Saturday peak hour. For the non-summer A.M. peak hour, the Trap Shooters Road westbound movement / approach operates at LOS F with 87.6 seconds average control average control delay. During the summer Saturday peak hour, the Trap Shooters Road westbound movement / approach operates at LOS F with 301.4 seconds average control delay. That is an average control delay of more than 5 minutes per vehicle.

While current 95th percentile queues do not appear to be bad per the analysis for current conditions, these queues will get worse and become a problem as the developments in the Magnolia area continue to grow with their associated increase in traffic volumes. The already unacceptable

control delays will deteriorate further and will be exacerbated by this continued growth in developments if no improvements are implemented.

Future Geometric and Traffic Conditions

Since the existing conditions analysis already show unacceptable operational results for the existing intersections, future without improvements (No-Build) was not analyzed. Four improvement alternatives were developed, all of which allow for access to and from SR1 via ramps with AASHTO compliant acceleration and deceleration lanes. Per HCM methodology for freeway facilities, freeway basic segments, ramps merge, and ramps diverge influence areas, the measures of effectiveness presented for future (Build) conditions are density measured in passenger car per mile per lane (pc/mi/ln) and LOS. Merge and diverge influence areas are illustrated in **Figure 6**, and the LOS criteria for them are presented in **Table 5**. Future analysis was for Opening year 2028 and Design Year 2050

Figure 7: Ramps Merge and Diverge Influence Areas

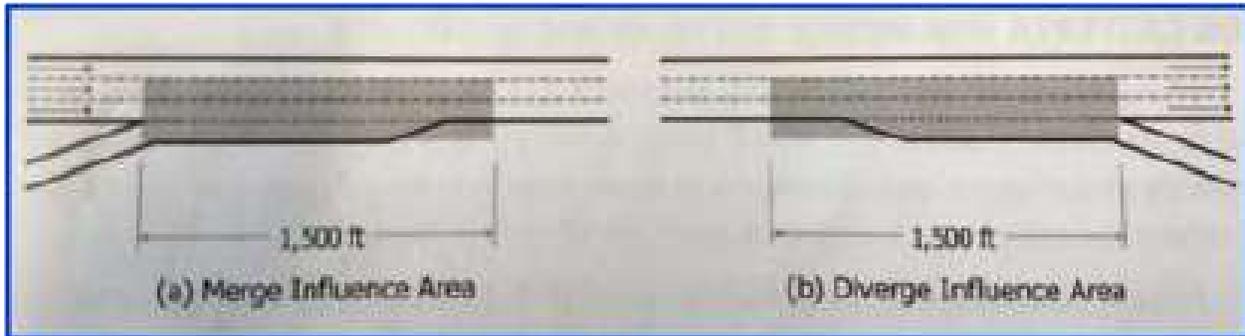


Table 5: Freeway Facilities LOS Criteria

MOE Criteria and Conditions Description			
LOS	Density (pc/mi/ln)		Operational Conditions
	Ramp Merge / Diverge	Basic Freeway Segment	
A	≤10	≤11	Unrestricted operations with smooth merging or diverging
B	>10 - 20	>11 - 18	Merging or diverging are noticeable but with little turbulence
C	>20 - 28	>18 - 26	Speed in the ramp influence area starts to decline & turbulence gets more noticeable
D	>28 - 35	>26 - 35	Turbulence in ramp influence area gets intrusive as most vehicles slow down to accommodate
E	>35	>35 - 45	Operations at or near capacity. Queues form with any small change in demand/traffic stream
F	V/C > 1.0	> 45 or V/C > 1.0	Demand exceeds roadway capacity with queues on both ramps & freeway / highway

There were no significant variations in densities between alternatives for the basic freeway segments and ramps merge/diverge influence areas and therefore there were no differences in LOS between alternatives. LOS for the various segments for Opening Year 2028 and Design Year 2050 for all Alternatives are presented in **Table 6** for northbound and **Table 7** for southbound. For year 2050, SR1 was analyzed with three lanes in each direction.

Table 6: Northbound SR1 Freeway Facilities LOS for Future Conditions

Facility	Opening Year 2028 LOS (2-Lane SR1)				Design Year 2050 LOS (3-Lane SR1)			
	Non-Summer			Summer	Non-Summer			Summer
	AM	PM	Saturday	Saturday	AM	PM	Saturday	Saturday
NB Basic Segment South of Exit Ramp	B	B	B	D	B	B	B	C
NB Exit Ramp Diverge Influence Area	C	B	B	D	B	B	B	C
NB Basic Segment between Exit Ramp & Entrance Ramp	B	B	B	D	B	B	B	C
NB Entrance Ramp Merge Influence Area	C	B	B	C	B	A	B	B
NB Basic Freeway Segment North of Entrance Ramp	C	B	B	D	B	B	B	C

Table 7: Southbound SR1 Freeway Facilities LOS for Future Conditions

Facility	Opening Year 2028 LOS (2-Lane SR1)				Design Year 2050 LOS (3-Lane SR1)			
	Non-Summer			Summer	Non-Summer			Summer
	AM	PM	Saturday	Saturday	AM	PM	Saturday	Saturday
SB Basic Segment North of Exit Ramp	B	C	B	D	A	B	B	C
SB Exit Ramp Diverge Influence Area	B	C	B	D	B	B	B	C
SB Basic Segment between Exit Ramp & Entrance Ramp	B	B	B	D	A	B	B	C
SB Entrance Ramp Merge Influence Area	B	B	B	D	A	B	B	C
SB Basic Freeway Segment South of Entrance Ramp	B	B	B	D	A	B	B	C

As shown in Table 6 and Table 7, all SR1 segments, northbound and southbound would operate at LOS C or better under both 2028 and 2050 peak hour conditions except for 2028 Summer Saturday under 2-Lane directional conditions. Under the 2028 Summer Saturday conditions almost northbound and southbound segments would operate at LOS D except for the northbound Entrance Ramp influence area, which would operate at LOS C.

Travel Time Analysis

To assess travel time changes between each of the four alternatives and the existing geometric conditions, Synchro/SimTraffic 11 was utilized to develop models for each. Two origin-destination (O-D) locations were assessed – Ponderosa Drive and the Town of Magnolia. The travel time changes were calculated based on travel times generated in SimTraffic. The results are presented in **Table 8** for Ponderosa Drive O-D, and **Table 9** for Town of Magnolia O-D.

Table 8: Travel Time Change with Ponderosa Drive Origin-Destination

Travel Time Change (Seconds)	Alt 1 Geometry				Alt 2 Geometry			
	Northbound Trips		Southbound Trips		Northbound Trips		Southbound Trips	
	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound
XX = Increase; (XX) = Decrease	11.7	20.6	12.5	6.7	0.2	9.2	9.7	5.7
Travel Time Change (Seconds)	Alt 3 Geometry				Alt 4 Geometry			
	Northbound Trips		Southbound Trips		Northbound Trips		Southbound Trips	
	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound
XX = Increase; (XX) = Decrease	(22.6)	(15.9)	63.5	9.0	(21.7)	4.5	62.6	10.4

Table 9: Travel Time Change with Town of Magnolia Origin-Destination

Travel Time Change (Seconds)	Alt 1 Geometry				Alt 2 Geometry			
	Northbound Trips		Southbound Trips		Northbound Trips		Southbound Trips	
	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound
XX = Increase; (XX) = Decrease	11.7	20.6	12.5	6.7	0.2	9.2	9.7	5.7
Travel Time Change (Seconds)	Alt 3 Geometry				Alt 4 Geometry			
	Northbound Trips		Southbound Trips		Northbound Trips		Southbound Trips	
	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound	Inbound	Outbound
XX = Increase; (XX) = Decrease	(72.8)	(72.4)	13.3	(47.5)	(71.9)	(53.2)	12.7	(47.3)

Crash Evaluation

Five-year crash data from October 21, 2017, to October 31, 2022, for NB SR1, SB SR1, Trap Shooters Road and Barkers Landing Road within the project limits was obtained from DelDOT Traffic Safety Section for Evaluation. All reported crashes that occurred on the specified roadways and their intersections were mapped. The Approximate crash locations, number, type and severity of crashes are presented **Figure 1**.

Barkers Landing Road

A total of two (2) crashes were reported as having occurred on Barkers Landing Road for the 5-year period. Both crashes involved property damage only. One crash was a front-to-rear collision, and the other was a vehicle collision with deer in the road.

Trap Shooters Road

A total of Twenty-one (21) crashes were reported as having occurred on Trap Shooters Road for the 5-year period, comprising three (3) personal injury and eighteen (18) property damage only crashes. A total of three (3) people were injured in the injury crashes. Majority of the crashes (13 / 61.9%) were reported as not a collision between two vehicles followed by (3 / 14.3%) each of front-to-front and front-to-rear crashes. One (1 / 4.8%) each of angle crashes and sideswipe same direction crashes were also reported. **Table 10** presents annual and five-year summary of the types of crashes by severity i.e., Property Damage (PD) and Personal Injury (PI).

Table 10: Trap Shooters Road Crash Type and Severity

Collision Type	Crash Severity / Classification															Crash Severity / Classification			
	PD	PI	Total	PD	PI	Total No. of Crashes	% of Total Crashes												
	October 31, 2017 - October 31, 2018			October 31, 2018 - October 31, 2019			October 31, 2019 - October 31, 2020			October 31, 2020 - October 31, 2021			October 31, 2021 - October 31, 2022			5-Year Totals			
Front to Front	0	1	1	0	0	0	1	0	1	0	0	0	1	0	1	2	1	3	14.3%
Front to Rear	0	0	0	1	0	1	1	0	1	1	0	1	0	0	0	3	0	3	14.3%
Angle	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	4.8%
Sideswipe, Opposite Direction	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	4.8%
Not a Collision Between Two Vehicles	4	1	5	1	1	2	5	0	5	1	0	1	0	0	0	11	2	13	61.9%
Total	5	2	7	3	1	4	7	0	7	2	0	2	1	0	1	18	3	21	100.0%

Figure 9: Trap Shooters Road Annual Crashes


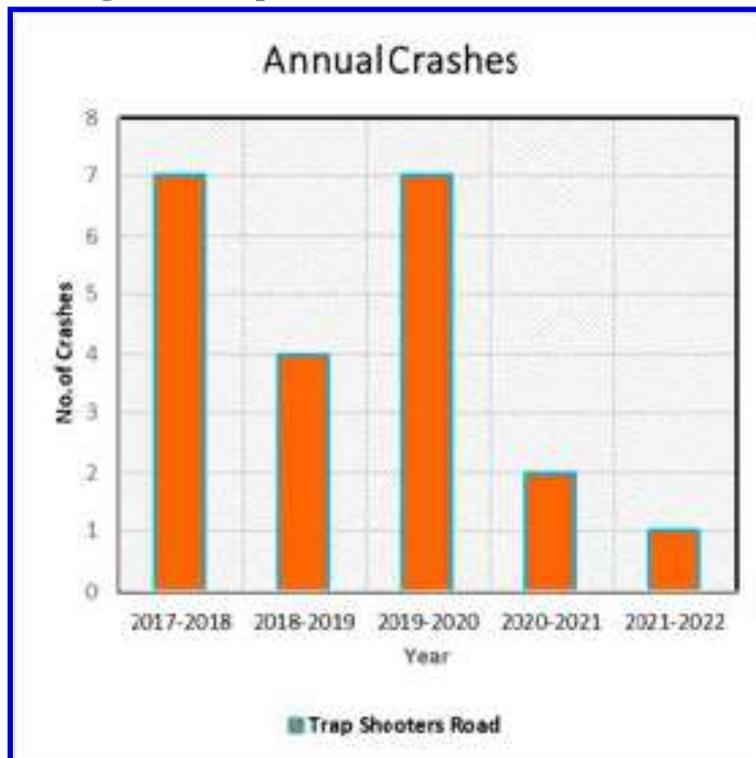


Figure 9 presents a graphical representation of the annual crashes. As provided in the figure, the highest number of annual crashes, seven (7), was reported during the 2017–2018 and 2019–2020 period. Four (4) crashes were reported for the 2018–2019 period, approximately 42.9% lower than both the prior and the following 12-month period. For the 2020–2021 period, reported crashes dropped approximately 71.4% from seven (7) to two (2). Reported crashes dropped 50.0% from two (2) the preceding 12-month period to one during the most recent one-year period from October 31, 2021, to October 31, 2022. Reported crashes for Trap Shooters Road appears therefore to be on a downward trend.

The five-year crashes by day of the week are presented in **Figure 10** and shows that majority of crashes (14 / 66.7%) were reported to have occurred on weekdays from Monday through Wednesday. The remaining crashes were almost evenly spread over the rest of the days.

Figure 10: Trap Shooters Road Day of the Week Crashes

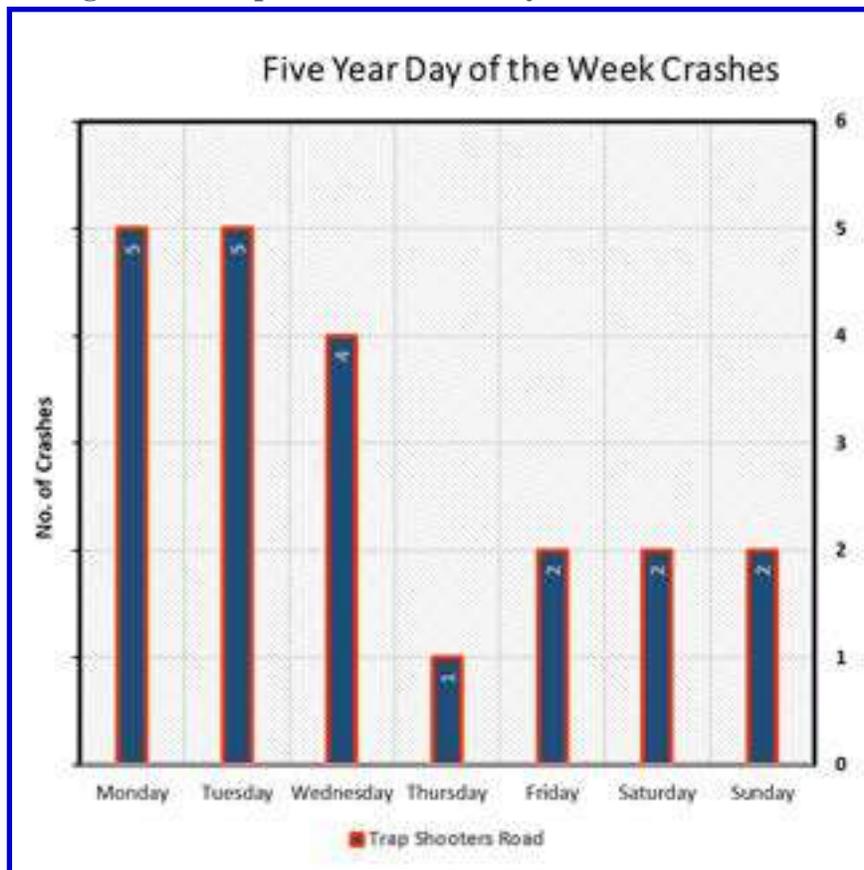

All reported crashes by time of day are presented in **Figure 11**. As shown, crashes for 5-year period are spread between 4:00 A.M., through the entire day, to midnight, but are highest between 4:00 P.M. and 7:00 P.M., corresponding with the higher volume P.M. hours. Crashes therefore appear to be higher during the hours of increased weekday traffic activity as is logically expected for a suburban collector road.

Figure 11: Trap Shooters Road Time of Day Crashes

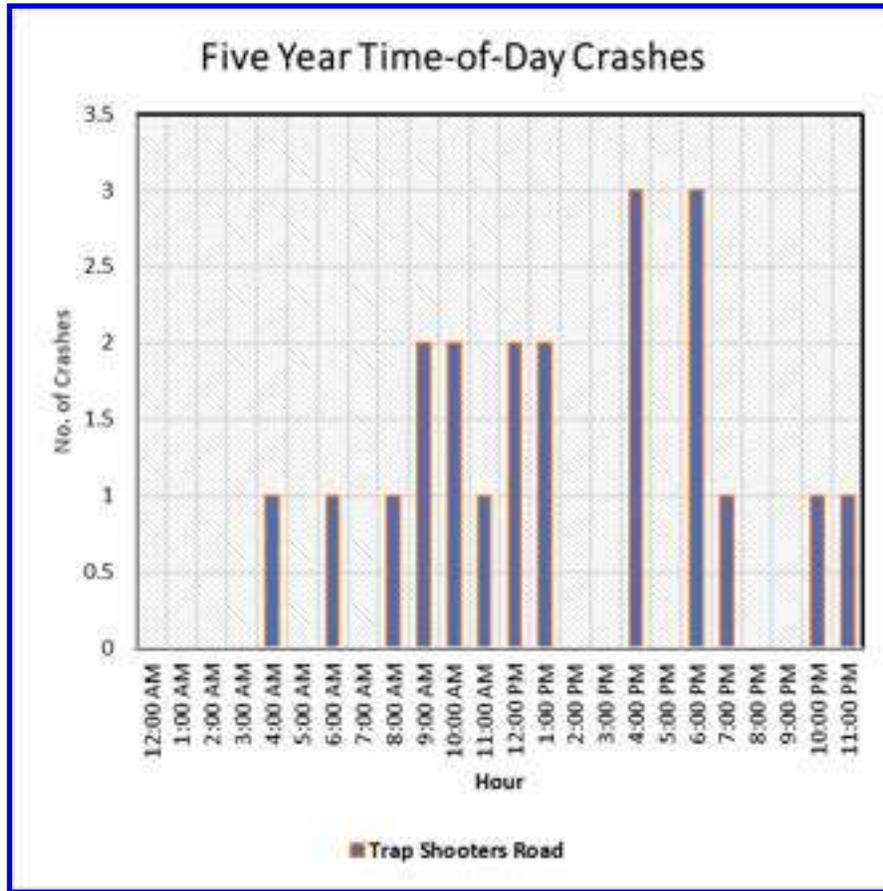


Table 11: Trap Shooters Road Provided Reasons for Crashes

Primary Reason for Crash		
Description	No. of Crashes	% Crash
Animal in Roadway - Deer	1	4.8%
Speeding	1	4.8%
Following too Close	2	9.5%
Driving in a Careless or Reckless Manner	6	28.6%
Driver Inattention, Distraction, or Fatigue	5	23.8%
Improper Passing	1	4.8%
Other Environmental Circumstances - Weather and/or Glare	2	9.5%
Other	1	4.8%
Unknown	2	9.5%
Total	21	100.0%

The primary contributing factors for crashes within the study limits are summarized in **Table 11**. As provided in the table, “Driving in a Careless or Reckless Manner” was the most frequent reason (6 / 28.6%) provided for reported crashes. This was followed closely by “Driver Inattention, Distraction, or Fatigue” (5 / 23.8%) and “Following too Close”, “Other Environmental Circumstances” and “Unknown” (2 / 9.5% each) were the next most frequent reasons. Together these accounted for nineteen (19), approximately 81% out of the total of the twenty-one (21) reported crashes. With exception of “Speeding” which accounted for one (1 / 4.8%) of all crashes, the attributed

reasons in the preceding, together with the various others provided in **Table 11**, are driver behaviors and circumstances that are not necessarily susceptible to correction with physical improvements measures.

As shown in **Table 12**, majority of the reported crashes (17 / 81%) occurred during daylight and dark but lighted conditions. It appears therefore that lighting may probably not be a significant contributing factor associated with the frequency of crashes within the study limits. Majority of the reported crashes (12 / 57.1%) on Trap Shooters Road occurred under wet and snow-covered road surface conditions. It is likely therefore that the road surface conditions may be a significant contributing factor to the frequency of crashes on Trap Shooters Road. As presented in **Table 12**, a little over half the reported crashes on Trap Shooters Road (11 / 52.4%) occurred under clear and cloudy, i.e., no-precipitation weather conditions while a little less than half of the reported crashes (10 / 47.6%) occurred during rain and snow i.e., precipitation weather conditions. It is probable therefore that weather conditions may have contributed to the frequency of reported crashes on Trap Shooters Road.

Table 12: Trap Shooters Road Lighting, Surface and Weather Conditions

Lighting Conditions			Surface Conditions			Weather Conditions		
Description	No. of Crashes	% of Total Crashes	Description	No. of Crashes	% of Total Crashes	Description	No. of Crashes	% of Total Crashes
Daylight	16	76.2%	Dry	9	42.9%	Clear	9	42.9%
Dark-Lighted	1	4.8%	Wet	11	52.4%	Cloudy	2	9.5%
Dark-Not Lighted	3	14.3%	Snow	1	4.8%	Rain	9	42.9%
Dawn	1	4.8%	Total	21	100.0%	Snow	1	4.8%
Total	21	100.0%				Total	21	100.0%

Southbound SR1


A total of Thirty-five (35) crashes were reported as having occurred on SB SR1 for the 5-year period, comprising seven (7) personal injury and twenty-eight (28) property damage only crashes. A total of eight (8) people were injured in the seven injury crashes. Majority of the crashes (21 / 60.0%) were reported as not a collision between two vehicles followed by (8 / 22.9%) front-to-front crashes. Four (4 / 11.4%) sideswipe same direction crashes and two (2 / 5.7%) angle crashes were also reported. **Table 13** presents annual and three-year summary of the types of crashes by severity i.e., Property Damage (PD) and Personal Injury (PI).

Table 13: Southbound SR1 Crash Type and Severity

Collision Type	Crash Severity / Classification															Crash Severity / Classification			
	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	Total No. of Crashes	% of Total Crashes
	October 31, 2017 - October 31, 2018			October 31, 2018 - October 31, 2019			October 31, 2019 - October 31, 2020			October 31, 2020 - October 31, 2021			October 31, 2021 - October 31, 2022			5-Year Totals			
Front to Rear	3	0	3	1	0	1	1	0	1	1	0	1	2	0	2	8	0	8	22.9%
Angle	0	0	0	0	0	0	1	1	2	0	0	0	0	0	0	1	1	2	5.7%
Sideswipe, Same Direction	0	0	0	0	0	0	1	1	2	1	0	1	0	1	1	2	2	4	11.4%
Not a Collision Between Two Vehicles	2	0	2	2	1	3	7	1	8	3	1	4	3	1	4	17	4	21	60.0%
Total	5	0	5	3	1	4	10	3	13	5	1	6	5	2	7	28	7	35	100.0%


Figure 12 presents a graphical representation of the annual crashes. As provided in the figure, the highest number of annual crashes, thirteen (13), was reported during the 2019–2020 period. Five (5) crashes were reported for the 2017–2018 period, approximately 61.5% lower than 2019–2020 period. For the 2018–2019 period, reported crashes dropped from five (5) to four (4), a 20% decrease. For the 2020–2021 period, reported crashes dropped approximately 53.8% from thirteen (13) to six (6). During the most recent one-year period from October 31, 2021, to October 31, 2022, reported crashes increased from six (6) for the preceding 12-month period to seven (7), i.e., by approximately 16.7%. While reported crashes have dropped significantly since the 2019-2020 period, it appears crash frequency is on SB SR1 is on an upward trend.

Figure 12: Southbound SR1 Annual Crashes

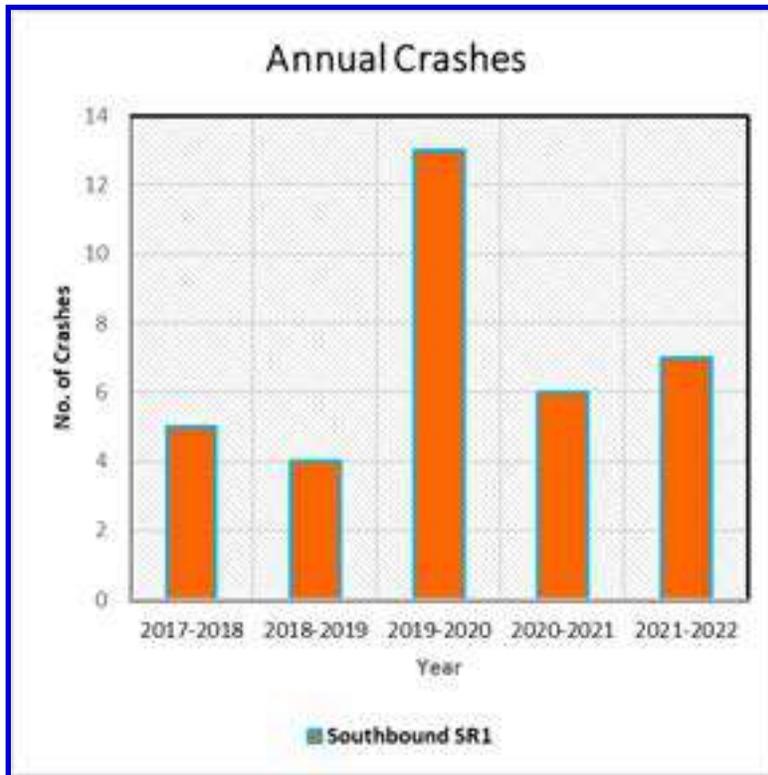

The five-year crashes by day of the week are presented in **Figure 13** and shows that Friday is the day with the highest reported number (10 / 28.6%) of crashes on SB SR1. Tuesday was the day with the next highest number (7 / 20%) of reported crashes. Saturday was the day with the lowest number (2 / 5.3.7%) of reported crashes. The remaining crashes were almost evenly spread over the rest of the days.

Figure 13: Southbound SR1 Time of Day Crashes

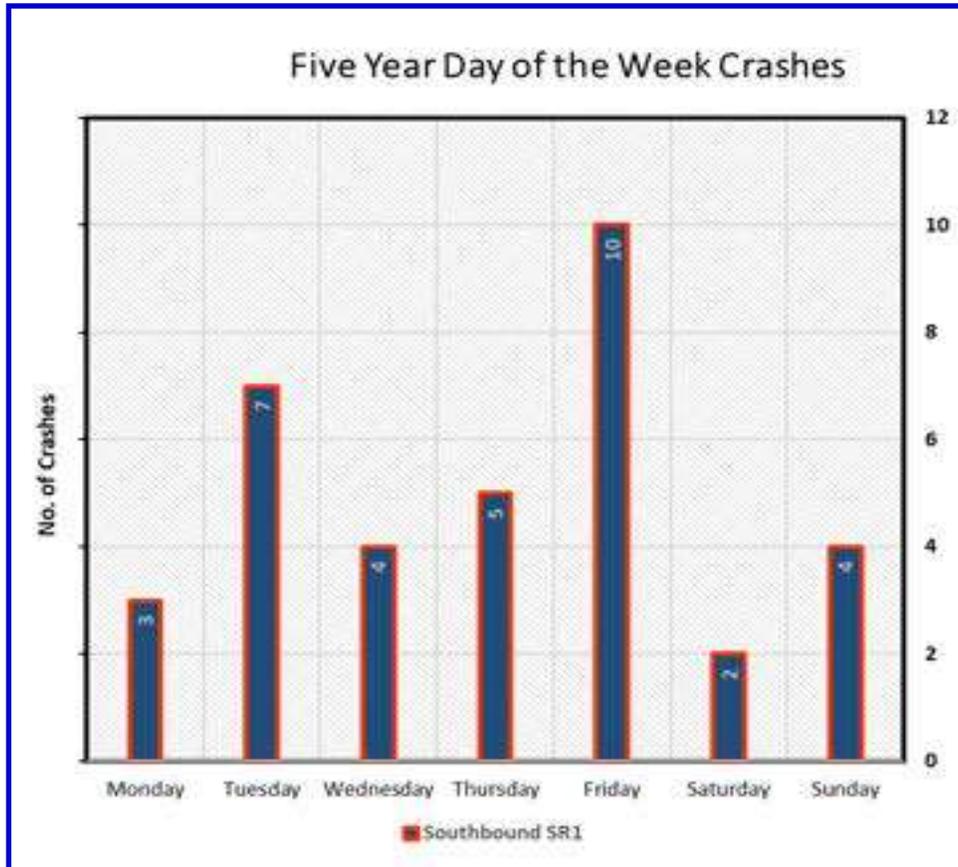

All reported crashes on SB SR1 by time of day are presented in **Figure 14**. As shown, crashes for the 5-year period are spread between 3:00 A.M. to 11:00 P.M. Per the data crashes appear to increase from 8:00 A.M. through 1:00 P.M., peaking during the hour beginning at noon with six (6 / 17.1%) reported crashes corresponding with the higher volume midday peak hours.

Figure 14: Southbound SR1 Time of Day Crashes

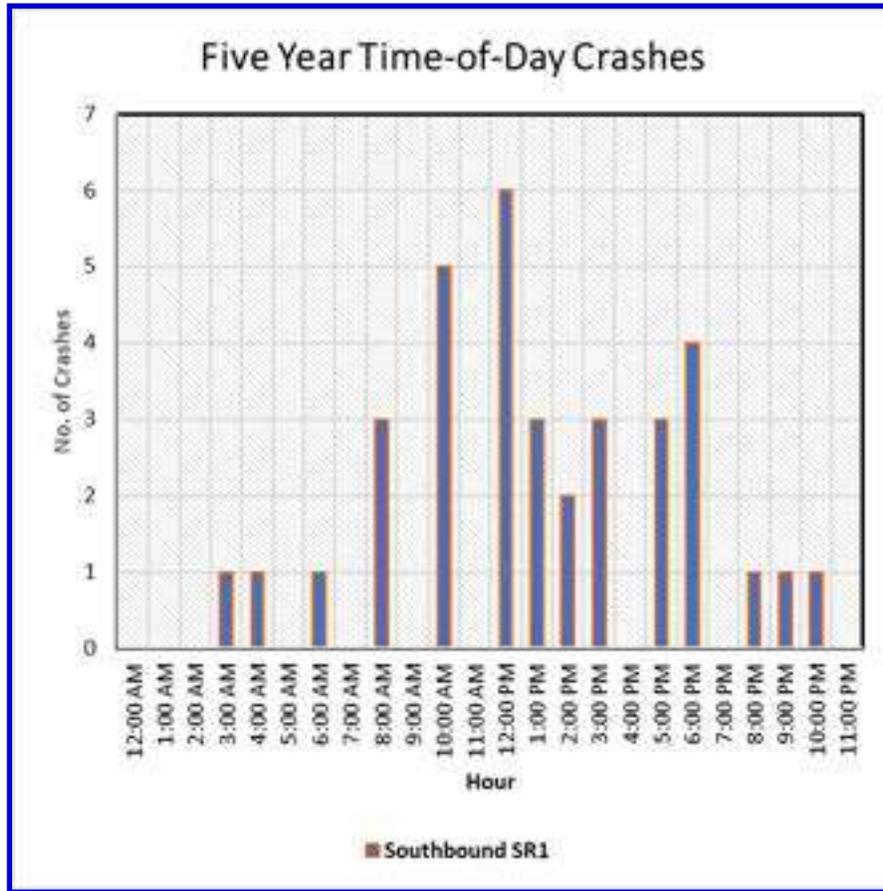


Table 14: Southbound SR1 Provided Reasons for Crashes

Primary Reason for Crash		
Description	No. of Crashes	% Crash
Animal in Roadway - Deer	2	5.7%
Failure to Yield Right of Way	1	2.9%
Following too Close	4	11.4%
Driving in a Careless or Reckless Manner	6	17.1%
Driver Inattention, Distraction, or Fatigue	7	20.0%
Driving Under the Influence	1	2.9%
Improper Lane Change	1	2.9%
Other Improper Driving	1	2.9%
Other Environmental Circumstances - Weather and/or Glare	7	20.0%
Roadway circumstances - debris; holes; work zone;	2	5.7%
Other	2	5.7%
Unknown	1	2.9%
Total	35	100.0%

The primary contributing factors for crashes on SB SR1 within the study limits are summarized in **Table 9**. As provided in the table, “Driver Inattention, Distraction, or Fatigue” and “Other Environmental Circumstances” (7 / 20.0% each) were the most frequent reason provided for reported crashes on SB SR1. This was followed closely by

“Driving in a Careless or Reckless Manner” (6 / 17.1%). “Following too Close” was the next most frequent reason for reported crashes. Together these accounted for twenty-four (24), approximately 68% out of the total of the thirty-five (35) total reported crashes. The attributed reasons in the preceding, together with the various others provided in **Table 14**, are driver behaviors and circumstances that are not necessarily susceptible to correction with physical improvements/measures. The two crashes reported under roadway circumstances occurred as a result of a bicycle in the roadway that may have fallen off a vehicle carrying it and was not a result of holes in the road or a work zone.

As shown in **Table 15**, majority of the reported crashes (32 / 91.4%) occurred during daylight and dark but lighted conditions. It appears therefore that lighting may probably not be a significant contributing factor associated with the frequency of crashes on SB SR1 within the study limits. A little over half of the reported crashes (18 / 51.4%) on SB SR1 occurred on road surface that was wet or icy / frosty or snow-covered or with pounding, while the remaining crashes (17 / 48.6%) occurred under dry road surface conditions. As provided in **Figure 8**, hydroplaning was involved in two (2) of the reported single vehicle crashes. It is likely therefore that the road surface conditions may be a significant contributing factor to the frequency of crashes on SB SR1. As presented in **Table 15**, Nineteen (19 / 54.3%) of reported crashes on SB SR1 occurred under clear and cloudy, i.e., no-precipitation weather conditions while sixteen (16 / 47.6%) of the reported crashes occurred during rain and snow i.e., precipitation weather conditions. It is probable therefore that weather conditions may have contributed to the frequency of reported crashes on SB SR1.

Table 15: Southbound SR1 Lighting, Surface and Weather Conditions

Lighting Conditions			Surface Conditions			Weather Conditions		
Description	No. of Crashes	% of Total Crashes	Description	No. of Crashes	% of Total Crashes	Description	No. of Crashes	% of Total Crashes
Daylight	27	77.1%	Dry	17	48.6%	Clear	17	48.6%
Dark-Lighted	5	14.3%	Wet	15	42.9%	Cloudy	2	5.7%
Dark-Not Lighted	2	5.7%	Ice/Frost	1	2.9%	Rain	14	40.0%
Dusk	1	2.9%	Snow	1	2.9%	Snow	2	5.7%
Total	35	100.0%	Water (Standing, Moving)	1	2.9%	Total	35	100.0%
			Total	35	100.0%			

Northbound SR1


A total of Nineteen (19) crashes were reported as having occurred on NB SR1 for the 5-year period, comprising one (1) Fatal, three (3) personal injury and fifteen (15) property damage only crashes. One person died in the fatal crash and a total of eleven (11) people were injured in the three injury crashes. Majority of the crashes (11 / 57.9%) were reported as not a collision between two vehicles followed front-to-front and sideswipe same direction crashes of which three each (3 / 15.8%) were reported. There remainder of the reported crashes comprised one (1 / 5.3%) front-to-front crash which resulted in the fatality and one (1 / 5.3%) angle crash. **Table 16** presents annual and three-year summary of the types of crashes by severity i.e., Property Damage (PD) and Personal Injury (PI) and Fatal (F).

Table 16: Southbound SR1 Crash Type and Severity

Collision Type	Crash Severity / Classification												Crash Severity / Classification								
	PD	PI	Total	PD	PI	Total	PD	PI	Total	PD	PI	F	Total	PD	PI	Total	PD	PI	F	Total No. of Crashes	% of Total Crashes
	October 31, 2017 - October 31, 2018			October 31, 2018 - October 31, 2019			October 31, 2019 - October 31, 2020			October 31, 2020 - October 31, 2021				October 31, 2021 - October 31, 2022			5-Year Totals				
Front to Front	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1	1	5.3%
Front to Rear	0	0	0	0	0	0	1	1	2	0	0	0	0	0	1	1	1	2	0	3	15.8%
Angle	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	0	1	0	0	1	5.3%
Sideswipe, Same Direction	2	0	2	0	0	0	1	0	1	0	0	0	0	0	0	0	3	0	0	3	15.8%
Not a Collision Between Two Vehicles	3	0	3	3	0	3	1	0	1	2	0	0	2	1	1	2	10	1	0	11	57.9%
Total	5	0	5	3	0	3	3	1	4	3	0	1	4	1	2	3	15	3	1	19	100.0%


Figure 15 presents a graphical representation of the annual crashes. As provided in the figure, the highest number of annual crashes, five (5), was reported during the 2017–2018 period. Three (3) crashes were reported for the 2018–2019 period, 40% lower than the preceding year. For the 2019–2020 period, reported crashes increased from three (3) to four (4), a 33.3% increase. For the 2020–2021 period, reported crashes remained the same as for the preceding year. During the most recent one-year period from October 31, 2021, to October 31, 2022, reported crashes decreased from four (4) for the preceding 12-month period to seven (3), a 25% decrease. It appears from the data that crash frequency on NB SR1 has remained lower for the last four years than they were for the 2017–2018 period and have not fluctuated significantly.

Figure 15: Northbound SR1 Annual Crashes

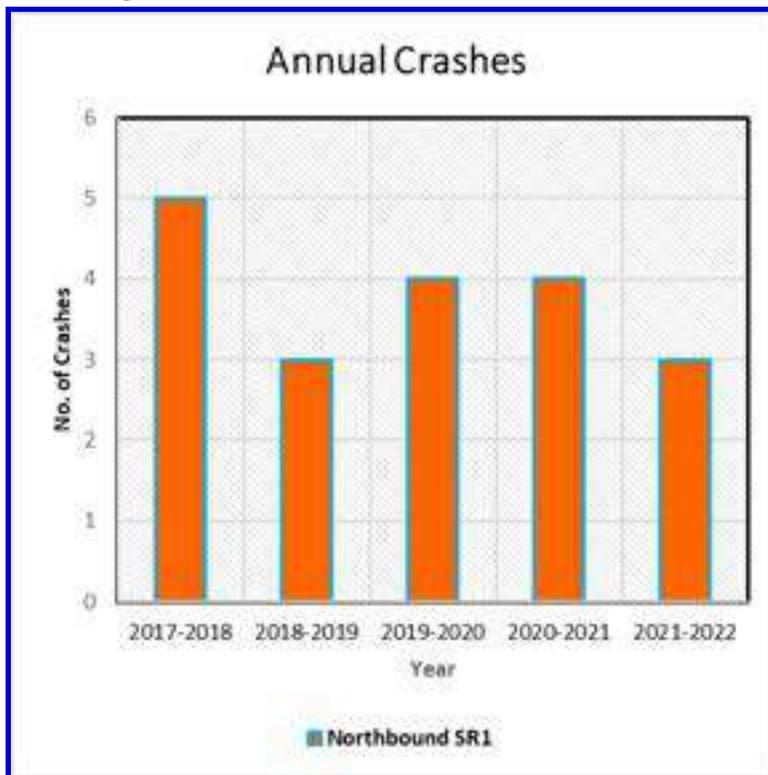

The five-year crashes by day of the week are presented in **Figure 16** and shows that Thursday is the day with the highest reported number (5 / 26.3%) of crashes on NB SR1. Monday and Wednesday were the days with the next highest number (4 / 21.1%) of reported crashes. No crashes were reported as occurring on Sunday. Three (3 / 15.8%) crashes occurred on Friday, two (2 / 10.5%) on Saturday and one (1 / 5.2%) on Tuesday.

Figure 16: Northbound SR1 Time of Day Crashes

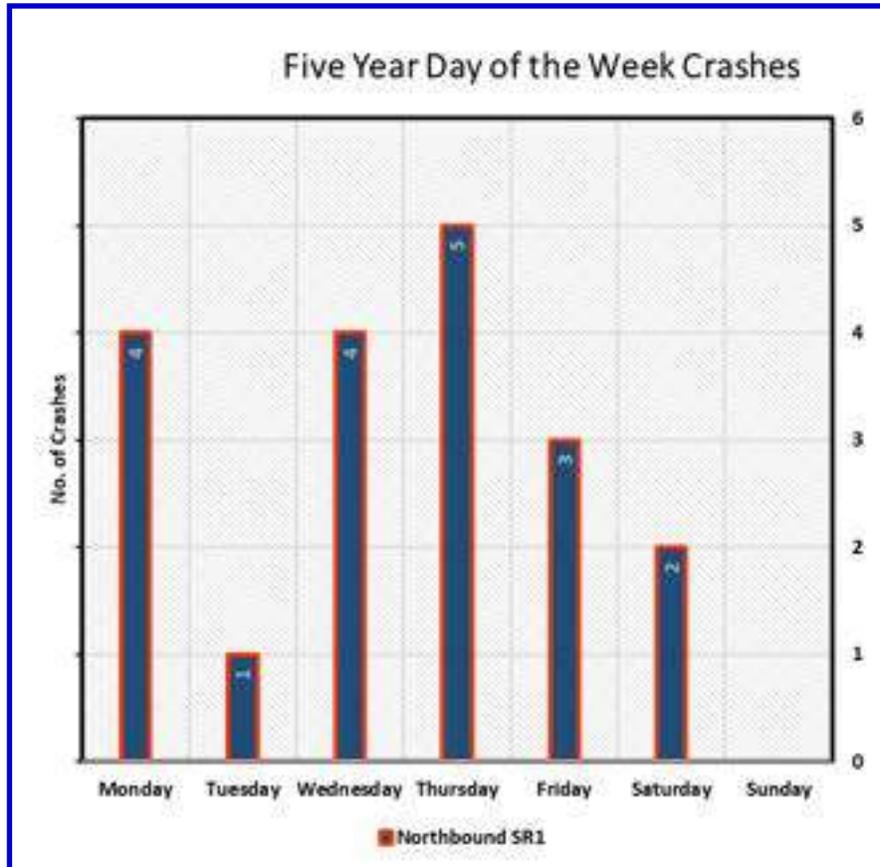

All reported crashes on NB SR1 by time of day are presented in **Figure 17**. As shown, for the 5-year period there appears to be one crash for the most part for the hours of the day that crashes were reported except for three (3) distinct peaks. For the hour beginning at midnight and that beginning at 11:00 A.M., there were 3 reported crashes each. For the hour beginning at 10:00 A.M., there were two (2) reported crashes.

Figure 17: Northbound SR1 Time of Day Crashes

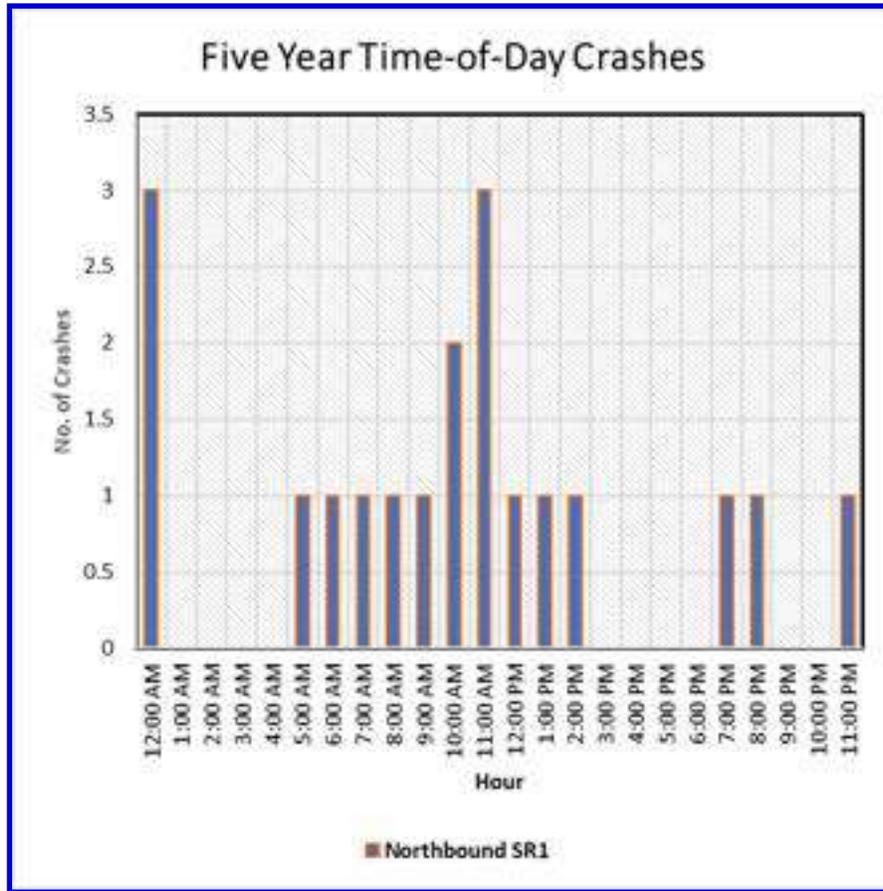


Table 17: Northbound SR1 Provided Reasons for Crashes

Primary Reason for Crash		
Description	No. of Crashes	% Crash
Animal in Roadway - Deer	3	15.8%
Failure to Yield Right of Way	1	5.3%
Driving in an Aggressive Manner	1	5.3%
Driving in a Careless or Reckless Manner	2	10.5%
Driver Inattention, Distraction, or Fatigue	1	5.3%
Driving Under the Influence	2	10.5%
Improper Lane Change	3	15.8%
Other Environmental Circumstances - Weather and/or Glare	2	10.5%
Other	1	5.3%
Unknown	3	15.8%
Total	19	100.0%

There does not appear to be wide variations in the number of crashes reported for each of the primary contributing factors for crashes on NB SR1 within the study limits as summarized in **Table 12**. As provided in the table, “Animal in Roadway”, “Improper Lane Change” and “Unknown” reasons were the most frequent with three (3 / 15.8%) each. The next most frequent were “Driving in a Careless or Reckless Manner”, “Driving Under the Influence” and “Other Environmental Circumstances” with two (2 / 10.5% each) reported. were the most frequent reason provided

for reported crashes on SB SR1. This was followed closely by (6 / 17.1%). There was one (1 / 5.3%) crash reported for each of the other reasons provided in the table. The attributed reasons provided in **Table 17**, are driver behaviors and circumstances that are not necessarily susceptible to correction with physical improvements/measures.

As shown in **Table 18**, majority of the reported crashes (14 / 73.7%) occurred during daylight and dark but lighted conditions. It appears therefore that lighting may probably not be a significant contributing factor associated with the frequency of crashes on NB SR1 within the study limits. Twelve (12) of the reported crashes, 63.2%, occurred under dry road surface conditions on NB SR1. Seven (7 / 36.8%) occurred on road surface that was wet or snow-covered or slushy. It is likely therefore that the road surface conditions may to some extent be a contributing factor to the frequency of crashes on NB SR1. As presented in **Table 18**, fifteen (15 / 78.9%) of reported crashes on NB SR1 occurred under clear and cloudy, i.e., no-precipitation weather conditions while four (4 / 21.1%) of the reported crashes occurred during rain and snow i.e., precipitation weather conditions. It is probable therefore that weather conditions may be a lesser contributing factor to the frequency of reported crashes on NB SR1.

Table 18: Northbound SR1 Lighting, Surface and Weather Conditions

Lighting Conditions			Surface Conditions			Weather Conditions		
Description	No. of Crashes	% of Total Crashes	Description	No. of Crashes	% of Total Crashes	Description	No. of Crashes	% of Total Crashes
Daylight	11	57.9%	Dry	12	63.2%	Clear	11	57.9%
Dark-Lighted	3	15.8%	Wet	4	21.1%	Cloudy	4	21.1%
Dark-Not Lighted	2	10.5%	Snow	2	10.5%	Rain	1	5.3%
Dawn	3	15.8%	Slush	1	5.3%	Snow	3	15.8%
Total	19	100.0%	Total	19	100.0%	Total	19	100.0%

Crash Rates

Crash rates for the length of the study roadways within the study area were computed for 2018, 2019, 2020 and 2021 and compared to the 2018, 2019, 2020 and 2021 crash rates obtained from DelDOT for roadways with similar characteristics in Kent County and statewide. The entire length of Trap Shooters Road was considered as being with the study length. The rates were computed for the years identified for which the five-year crash data includes a full calendar year in addition to current availability of annual average daily traffic (AADT) from DelDOT. Since the crash rates for Kent County and State of Delaware are based on calendar year data, this allows for a fair comparison. The crash rates are measured in crashes per million vehicle miles travelled (C/MVMT).

Available DelDOT gateway AADT for SR1 is bidirectional. Based on Wavetronix device data in the vicinity of the study area, NB SR1 and SB SR1 diurnal traffic volumes average out close to even. The directional AADT were therefore assigned according to a 50% directional distribution.

SR1 (northbound and southbound) is functionally classified as Other Expressway & Freeway. Northbound SR1 and Southbound SR1 crash rates were compared to the crash rates for similar Other Expressways and Freeway in Kent County and statewide. Trap Shooters Road and Barkers Landing Road are both two-lane roadways classified as Major Collectors. Since the current setting in which these two roads are located is more rural than urban, their crash rates were compared to the crash rates for similar Rural Major Collectors in Kent County and statewide. **Table 19**, **Table 20**, **Table 21** and **Table 22** respectively present the 2018, 2019, 2020 and 2021 crash rates for the study roadways and the 2018, 2019, 2020 and 2021 crash rates for similar roadways in Kent County and statewide.

SR1, Trap Shooters Roads Study
Traffic Report

Table 19: 2018 Study Roadways Crash Rate

Road	Functional Class	2018 AADT	No of Crashes (2018)	Length	Roadway Crash Rate (C/MVMT) (2018)	2018 Kent County Crash Rate (C/MVMT)	2018 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	18,664	4	0.65	0.90	0.77	0.67
Southbound SR1	Other Expressway & Freeway	18,664	5	0.65	1.13	0.77	0.67
Trap Shooters Rd	Rural Major Collector	1,784	7	0.44	24.43	2.47	2.88
Barkers Landing Rd	Rural Major Collector	1,898	2	0.16	18.04	2.47	2.88

Table 20: 2019 Study Roadways Crash Rate

Road	Functional Class	2019 AADT	No of Crashes (2019)	Length	Roadway Crash Rate (C/MVMT) (2019)	2019 Kent County Crash Rate (C/MVMT)	2019 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	18,808	4	0.65	0.90	0.17	0.13
Southbound SR1	Other Expressway & Freeway	18,808	5	0.65	1.12	0.17	0.13
Trap Shooters Rd	Rural Major Collector	1,847	5	0.44	16.86	0.75	0.76
Barkers Landing Rd	Rural Major Collector	1,989	0	0.16	0.00	0.75	0.76

Table 21: 2020 Study Roadways Crash Rate

Road	Functional Class	2020 AADT	No of Crashes (2020)	Length	Roadway Crash Rate (C/MVMT) (2020)	2020 Kent County Crash Rate (C/MVMT)	2020 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	14,962	3	0.65	0.85	0.18	0.15
Southbound SR1	Other Expressway & Freeway	14,962	13	0.65	3.66	0.18	0.15
Trap Shooters Rd	Rural Major Collector	1,468	5	0.44	21.21	0.54	0.67
Barkers Landing Rd	Rural Major Collector	1,581	0	0.16	0.00	0.54	0.67

Table 22: 2020 Study Roadways Crash Rate

Road	Functional Class	2021 AADT	No of Crashes (2021)	Length	Roadway Crash Rate (C/MVMT) (2021)	2021 Kent County Crash Rate (C/MVMT)	2021 State of Delaware Crash Rate (C/MVMT)
Northbound SR1	Other Expressway & Freeway	19,533	5	0.65	1.08	0.15	0.14
Southbound SR1	Other Expressway & Freeway	19,533	8	0.65	1.73	0.15	0.14
Trap Shooters Rd	Rural Major Collector	1,714	2	0.44	7.27	0.54	0.67
Barkers Landing Rd	Rural Major Collector	2,018	0	0.16	0.00	0.54	0.67

The ratio of each study roadway crash rate to the rate for Kent County and the State of Delaware for similar roadways in 2018, 2019, 2020 and 2021 were also computed. The 2018, 2019, 2020 and 2021 crash rate comparisons are respectively provided in **Table 23**, **Table 24**, **Table 25** and **Table 26**.

Table 23: 2028 Study Roadways Crash Rates Ratio to County and State Rates

Functional Class	Ratio of 2018 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2018 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	1.17	1.35
Southbound SR1	1.47	1.69
Trap Shooters Rd	9.89	8.48
Barkers Landing Rd	7.31	6.27

Table 24: 2019 Study Roadways Crash Rates Ratio to County and State Rates

Functional Class	Ratio of 2019 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2019 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	5.27	6.90
Southbound SR1	6.59	8.62
Trap Shooters Rd	22.47	22.18
Barkers Landing Rd	0.00	0.00

Table 25: 2020 Study Roadways Crash Rates Ratio to County and State Rates

Functional Class	Ratio of 2020 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2020 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	4.70	5.63
Southbound SR1	20.35	24.41
Trap Shooters Rd	39.27	31.65
Barkers Landing Rd	0.00	0.00

As provided in the tables, the 2018 crash rates for all the study roadways are higher than those for similar roadways in the County and Statewide. For 2019, 2020 and 2021, no crashes were reported on Barkers Landing Road for the segment assessed as part of this study, therefore crash rates were zero, lower than for the Kent County and statewide. As the ratios show, for NB SR1, SB SR1 and Trap Shooters Road, the crash rates for 2019, 2020 and 2021 are much higher than for similar roadways in Kent County and statewide.

Northbound SR1

As provided in **Table 23** through **Table 26**, the NB SR1 crash rates ratios to the Kent County and statewide rates increased sharply in 2019 compared to the 2018 ratios. The 2020 ratios dropped a little compared to the 2019 ratios, then increased more than they dropped for 2021.

Table 26: 2021 Study Roadways Crash Rates Ratio to County and State Rates

Functional Class	Ratio of 2021 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2021 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	7.19	7.71
Southbound SR1	11.51	12.33
Trap Shooters Rd	13.45	10.84
Barkers Landing Rd	0.00	0.00

Southbound SR1

As provided in **Table 23** through **Table 26**, the SB SR1 crash rates ratios to the Kent County and statewide rates increased sharply in 2019 compared to the 2018 ratios. The 2020 rates increased steeply from the 2019 6.59 times the Kent County rate of 0.17 and 8.62 times the statewide rate of 0.13, to 22.47 times the Kent County rate of 0.18 and 22.18 times the statewide rate of 0.15. For 2021, the ratios dropped almost halve, but the crash rate was still 11.51 times the Kent County rate of 0.15 and 12.33 times the statewide rate of 0.14.

Trap Shooters Road

As provided in **Table 23** through **Table 26**, the Trap Shooters crash rates ratios to the Kent County and statewide rates increased steeply in 2019 compared to the 2018 ratios. The 2019 rates increased from the 2018 9.89 times the Kent County rate of 2.47 and 8.48 times the statewide rate of 2.88, to 22.47 times the Kent County rate of 0.75 and 22.18 times the statewide rate of 0.76. The 2020 rates again increase sharply from the 2019 rates to 39.27 times the Kent County rate of 0.54 and 31.65 times the statewide rate of 0.67. For 2021, the ratios dropped, but the crash rate was still 13.45 times the Kent County rate of 0.54 and 10.84 times the statewide rate of 0.67.

Safety Improvement / Crash Reduction Benefit

Crashes for calendar year 2018 through 2021 was used to assess the safety benefits of the proposed improvements in terms of their potential for crash reduction. Only crashes susceptible to correction with the geometric improvements were included in the assessment. All four proposed alternatives allow for access to and from SR1 via ramps with AASHTO compliant acceleration and deceleration lanes, therefore the crash reduction potential would be the same irrespective of the alternative that is selected and built. The 2010 AASHTO Highway Safety Manual was used to determine the crash modification factor (CMF) used in computing the potential crash reduction. Estimated annual monetary value of the reduction in crashes was obtained using the US Department of transportation (USDOT) suggested 2021 base year dollar rates. The results

are summarized in **Table 27**. As provided in the table, the project would yield an estimated annual crash reduction benefit of approximately \$3.5 million.

Table 27: Project Estimated Annual Safety Improvement / Crash Reduction Benefit

	No. of Vehicles involved in Property Damage Crashes	Injury Crashes	Fatal Crashes	Annual Crash Reduction Benefit
2018 through 2021 Calendar Years*	72	11	1	
HSM CMF	0.84	0.84	0.84	
Crashes after Project	60.48	9.24	0.84	
Annual Crash Reduction	15.12	2.31	0.21	
USDOT Monetized Value per crash**	\$4,800.00	\$307,800.00	\$13,046,800.00	
Annual Crash Benefit Reduction	\$72,576.00	\$711,018.00	\$2,739,828.00	

SR1 and Trap Shooters Road Interchange

Appendix D: Public Workshop Summaries

Trap Shooters Road SR1 Interchange Public Workshop #1

01/23/2023 – Virtual Meeting via Zoom

The Dover Kent County MPO in partnership with DeIDOT initiated a study to develop and evaluate alternatives at the intersection of SR1 and Trap Shooter Road to improve safety and capacity at this intersection. This initial workshop was virtual via Zoom held on January 23, 2023, provided the public with an overview of the existing conditions and solicited comments and feedback from the public on their experience at the intersection.

January 23, 2023
6:00 PM – 7:30 PM
Virtual Zoom Meeting



The public workshop was advertised for approximately 30 days prior to the workshop dates. Flyers and mailers were created and emailed to the elected officials and project partners for posting on their social media and web pages. The workshops were also advertised on the MPO's and DeIDOT's webpage and the State's public meeting calendar. In addition, over 500 direct mailings were sent out to area residents to inform them of the upcoming workshop.

The workshop format was a virtual meeting on the Zoom platform. The virtual meeting started with a welcome video with instructions on how to participate in the public meeting. The formal presentation started at 6:10 pm. Drew Boyce provided the formal presentation with interactive polling questions throughout the presentation and a question-and-answer session at the end of the presentation. The information presented included the following:


- Study Area
- Purpose and Need
- Work Plan
- Existing Conditions
- Current DeIDOT Efforts
- Schedule
- Questions

A total of 13 people registered in advance of the workshop and 8 people attended the public workshop. No elected officials attended the workshop. There was a good cross


section of people that used the intersection to access SR1. Several polling questions were used to engage the participants and the results are as follows:

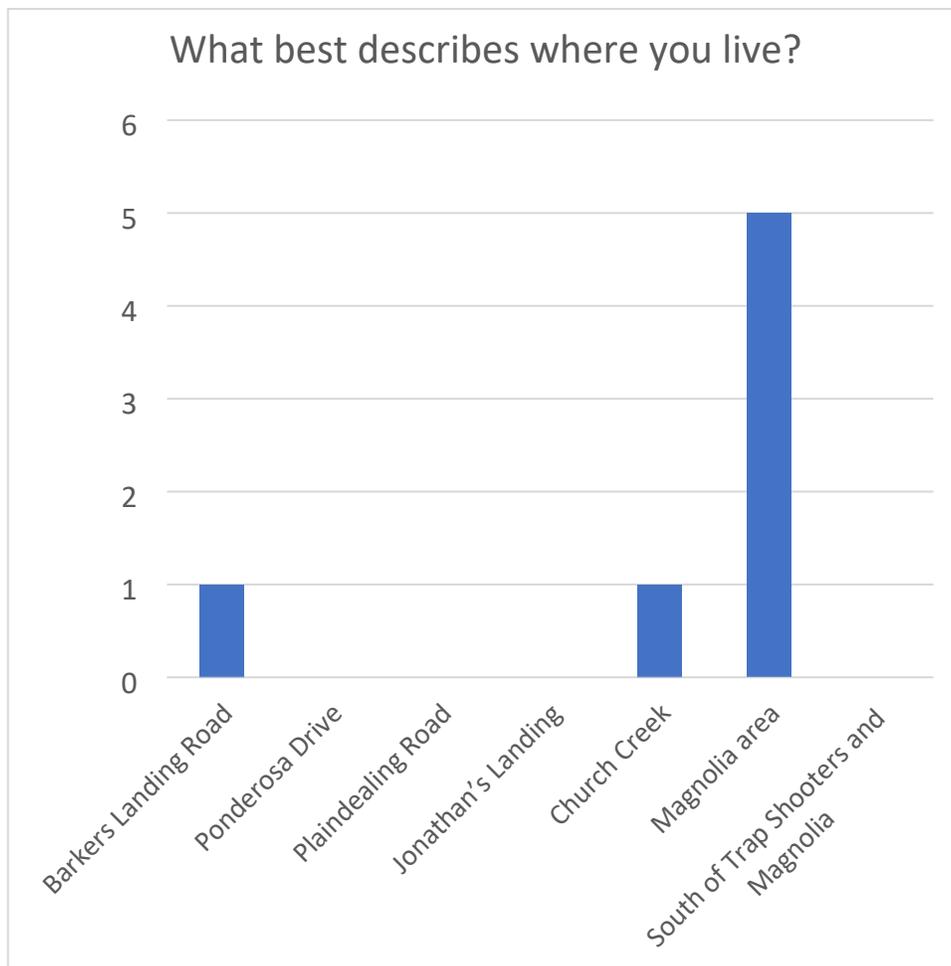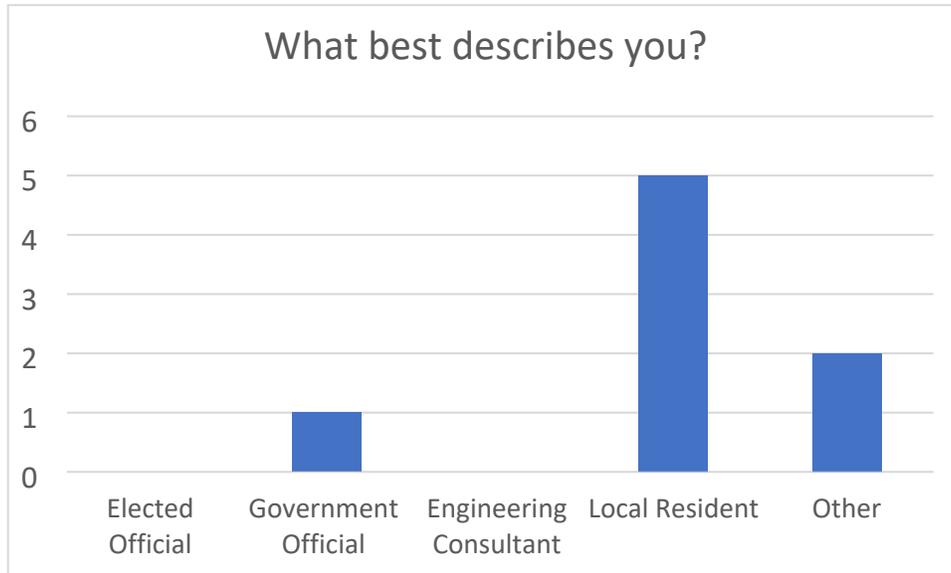

How many times a week to you drive through this intersection?

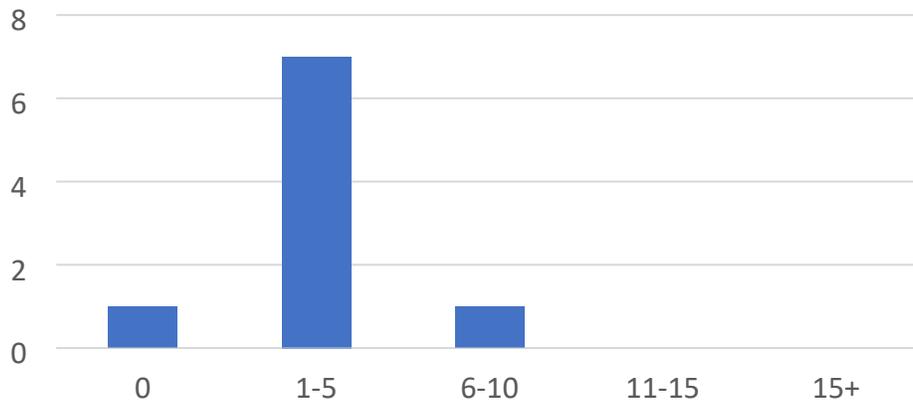


Have you or someone you know ever been in a crash or a near miss at this intersection?

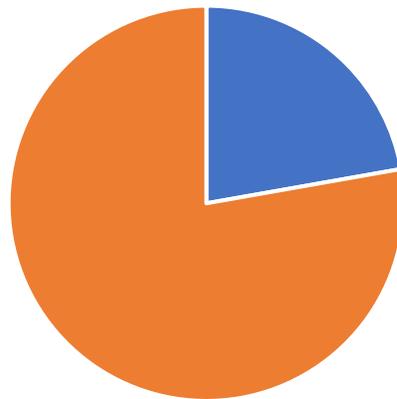

■ Yes ■ No

Did you think there would be more crashes on SR1
in the SB direction than in the NB

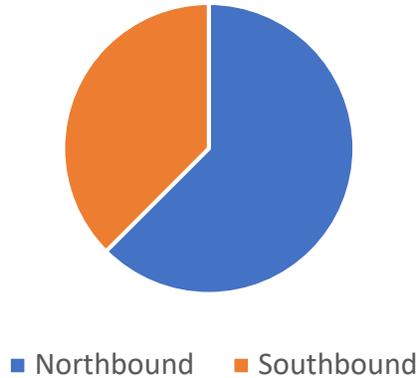

Are you familiar with DeIDOT's Corridor Capacity
Preservation Program?



In general, the feedback received was positive. Most of attendees acknowledged that the intersection needed to be improved.

The following pages contain the presentation presented at the workshop, attendees list, and post workshop survey.

All workshop materials are available on the Dover/Kent County MPO's website.

Flyer and Mailer

Trap Shooters Road Public Workshop

Help us develop the new plan for Trap Shooters Road!



Join Us!

Join us for an informational meeting to understand issues and concerns.

We want to hear from you!

January 23rd
6:00 PM
On Zoom
Register at:



https://us02web.zoom.us/webinar/register/WN_NcHs5xtiTuydiSPDA_K-Lw



Presentation

SR1 and Trap Shooters Road Planning Study

Public Workshop #1
Existing Conditions

January 23, 2023



How to Participate

- How Can I Participate in this Workshop?
 - You Can Listen Using Your Computer Speakers or by Calling in on Your Phone
- To Listen to the Audio Using Your Phone, Please Call:
 - Phone Number: 1 305 224 1968
 - Webinar ID: 869 8564 4765
 - Passcode: 942031
- All Attendees, Whether on the Phone or Using Computer Speakers, will be Joining this Session in Listen-Only Mode





- *9 - Raise Hand



- *6 - Unmute/Mute

To Ask A Question

During the Session, Please Type All Questions and Comments in the Q&A Box which is Located on the Bottom Bar at the Bottom of Your Screen. Move Your Mouse to the Bottom of the Screen and the Bar will Appear.

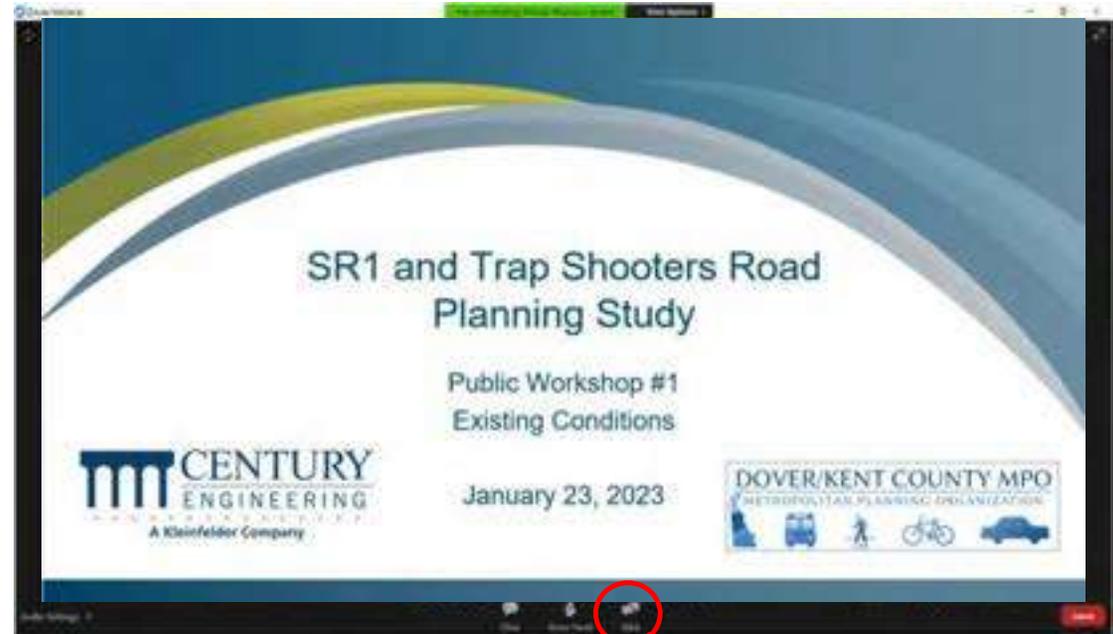

To Ask A Question

- If you cannot use the Q&A function, please email questions directly to:
- James.Galvin@doverkentmpo.org
- Each question will be reviewed by the moderator, and panelists will respond verbally to the questions that are chosen
- Specific questions may be answered directly within the Q&A function

Agenda

- Study Area
- Purpose and Need
- Work Plan
- Existing Conditions
- Current DeIDOT Efforts
- Schedule
- Questions



Study Area

- SR1
- Trap Shooter Road
- Barkers Landing Road



Poll Question #1

- What best describes you?
 - Elected Official
 - Government Official
 - Engineering Consultant
 - Local Resident
 - Other




Poll Question #2


- What best describes where do you live?
 - Barkers Landing Road
 - Ponderosa Drive
 - Plaindealing Road
 - Jonathan's Landing
 - Church Creek
 - Magnolia area
 - South of Trap Shooters and Magnolia
 - Other



Purpose and Need

- Purpose
 - Improve safety and capacity at the intersection of SR1 and Trap Shooters Road
- Need
 - The intersection is experiencing high crash rates
 - The intersection reducing the overall capacity of SR1

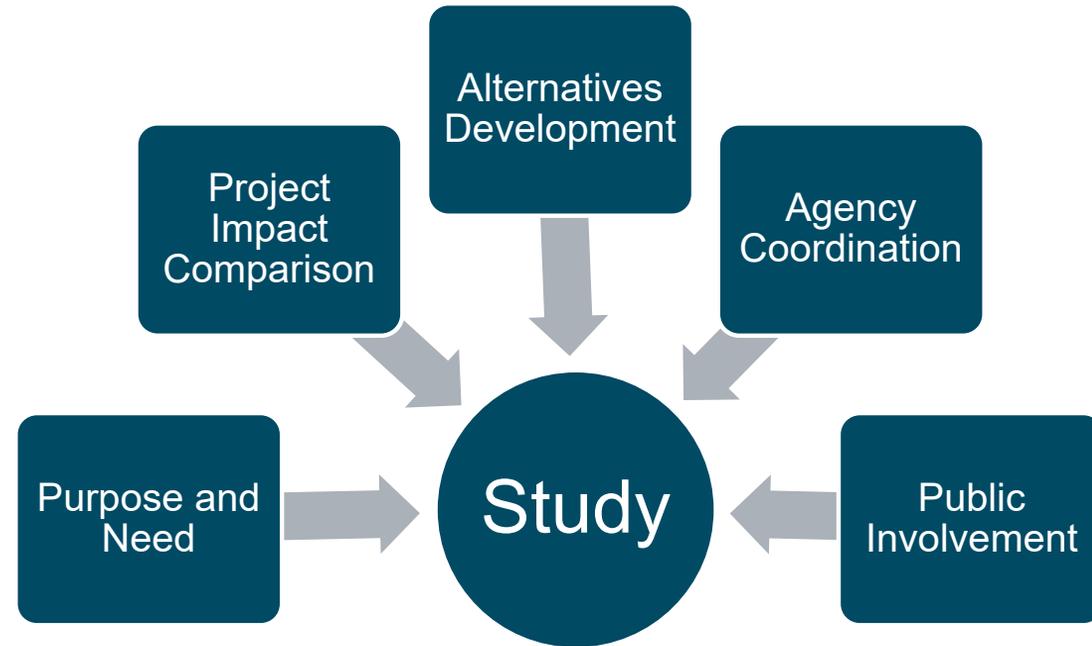

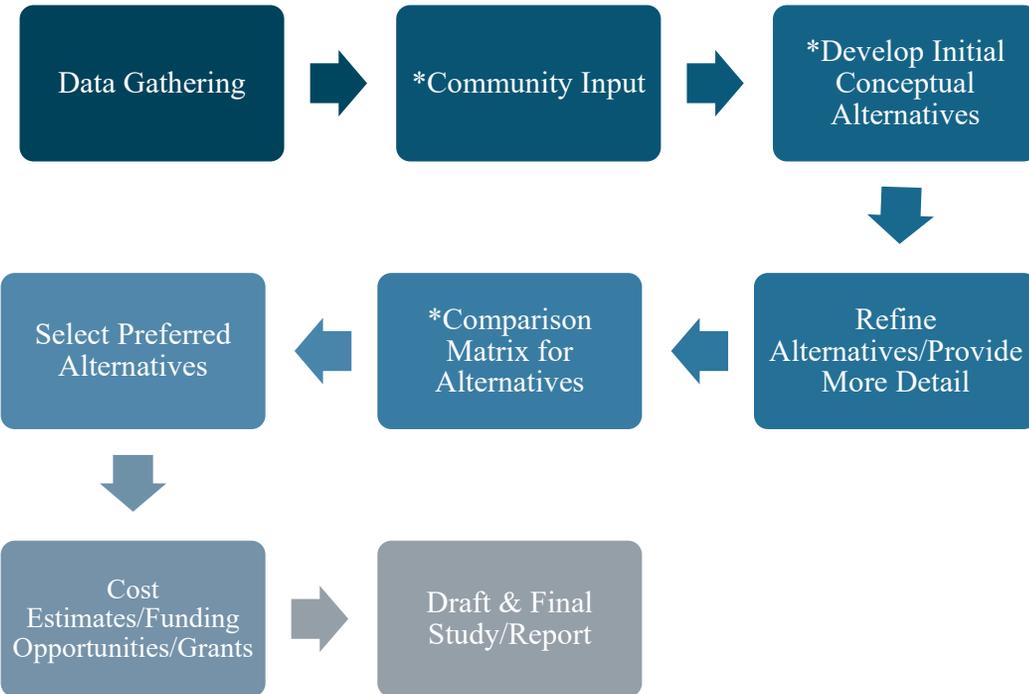

Comparison Matrix

- Level of service
- Safety
- Environmental Impacts
- Stormwater management
- Others as appropriate for the proposed design(s)

Public Outreach (Continuous Throughout)

Existing Conditions



Existing Conditions



Poll Question #3

- How many times a week to you drive through this intersection?
 - 0
 - 1-5
 - 6-10
 - 11-15
 - >15




Existing Conditions

- Traffic Counts
 - Oct and Nov 2022
 - DeIDOT data was used to calculate Summer Saturday turning movement volumes



Existing Conditions

- Summer Saturday peak hour turning movements
- About 1/2 of the volumes during a weekday peak hour

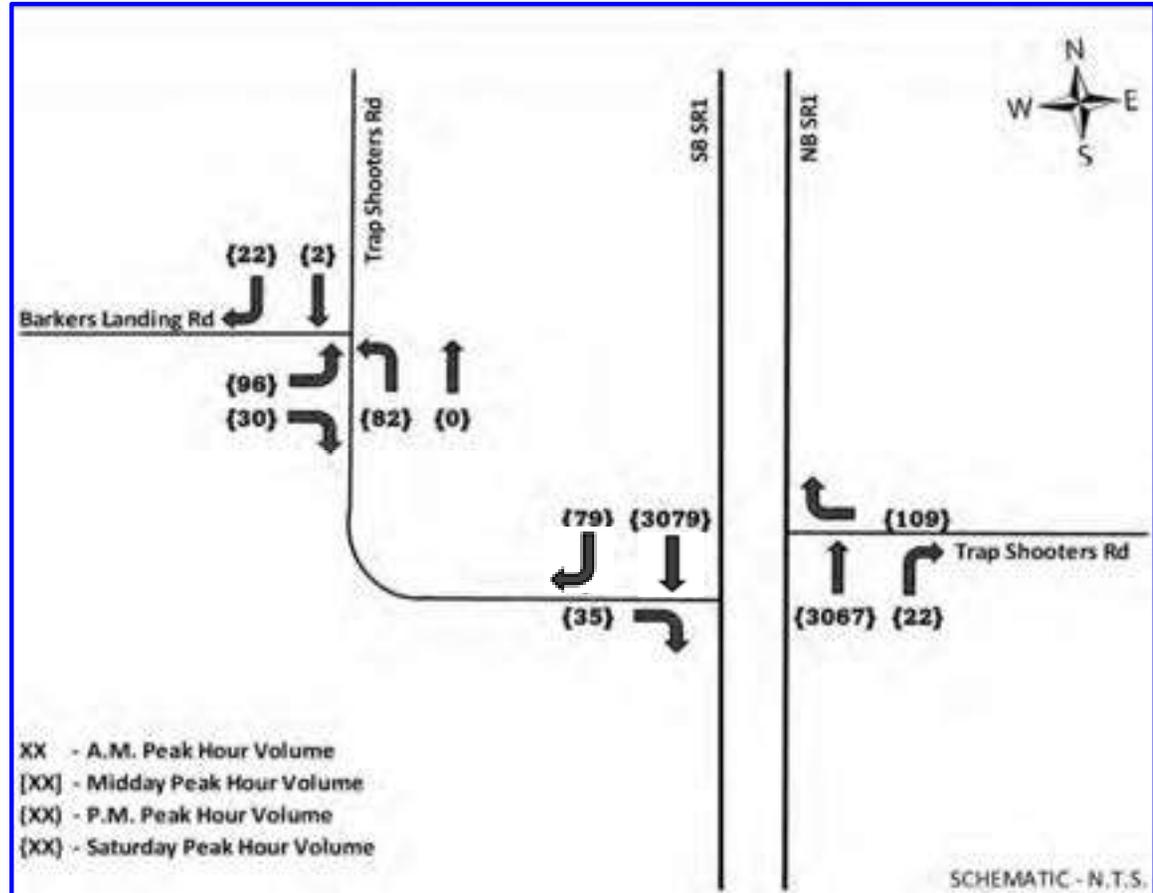

Existing Conditions

Level of Service
(LOS)

What is it?

A measure of delay



Existing Conditions

SB SR1 and Trap Shooters Rd

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	EBR Trap Shooters Rd	17.4	C	15	16.4	C	8	27.6	D	15	21.5	C	13	93.5	F	53

NB SR1 and Trap Shooters Rd

Control Type	Movement	Measures of Effectiveness under Existing 2022 Traffic Conditions														
		Weekday AM			Weekday Midday			Weekday PM			Non-Summer Saturday			Summer Saturday		
		Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)	Delay (Sec)	LOS	95th % Queue (ft)
Two-Way Stop	WBR Trap Shooters Rd	87.6	F	198	16.9	C	23	27.1	D	38	35.6	E	70	301.4	F	213

Existing Conditions

- Crash Data
 - October 21, 2017, to October 31, 2022



***Traffic Advisory* State Police Investigating Serious Crash- Magnolia**


Map data ©2017 Google, Imagery ©2017 Google



Poll Question #4



- Have you or someone you know ever been in a crash or a near miss at this intersection?
 - Yes
 - No



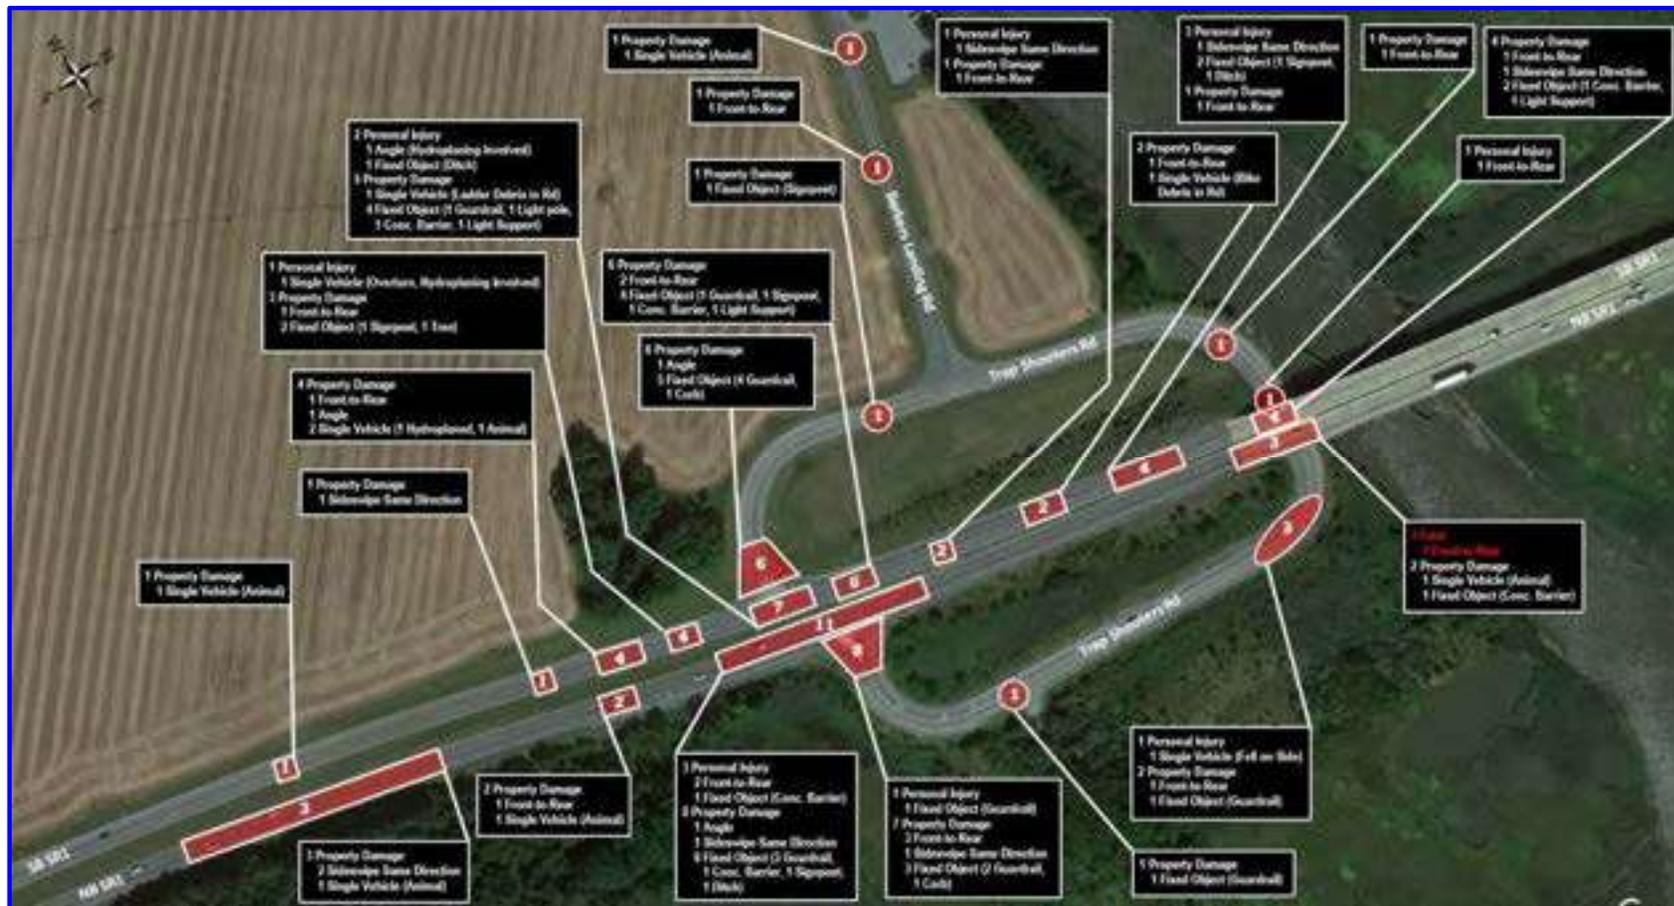



Existing Conditions

- SR1 Southbound Crashes
 - Total of 35 crashes
 - 2020 experienced an abnormally high number of crashes
 - Friday has a higher number of crashes

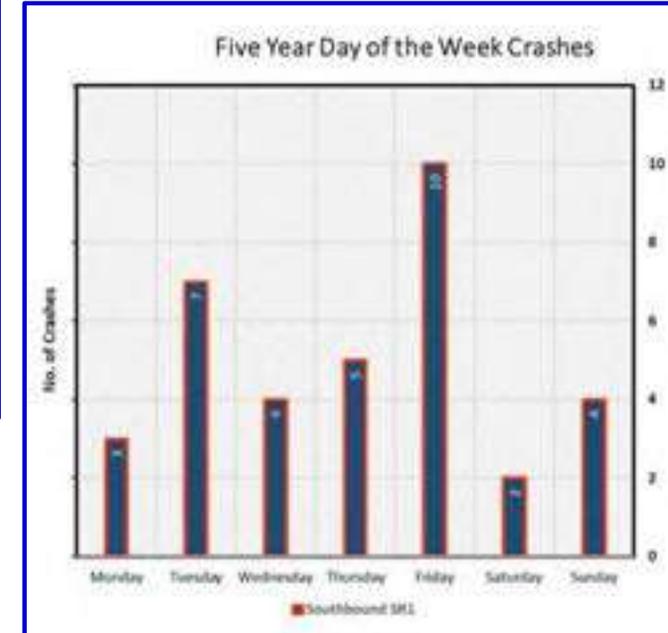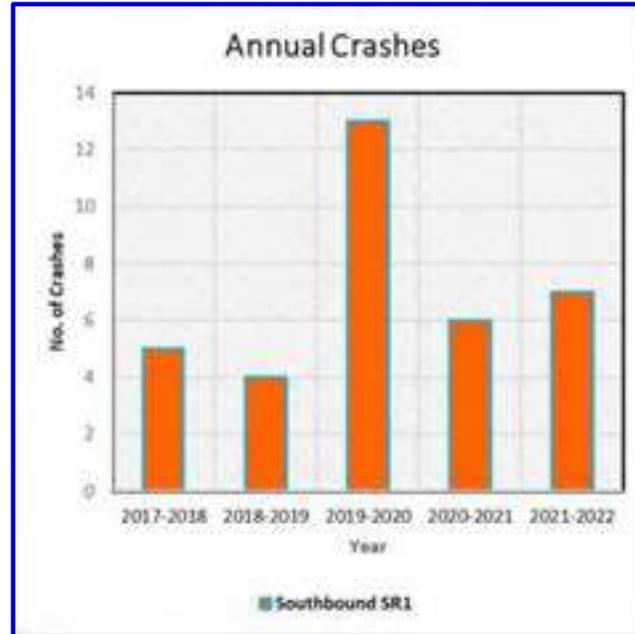

Existing Conditions

- SR1 Northbound Crashes
 - Total of 19 crashes
 - Relatively consistent number of crashes across the 5 years

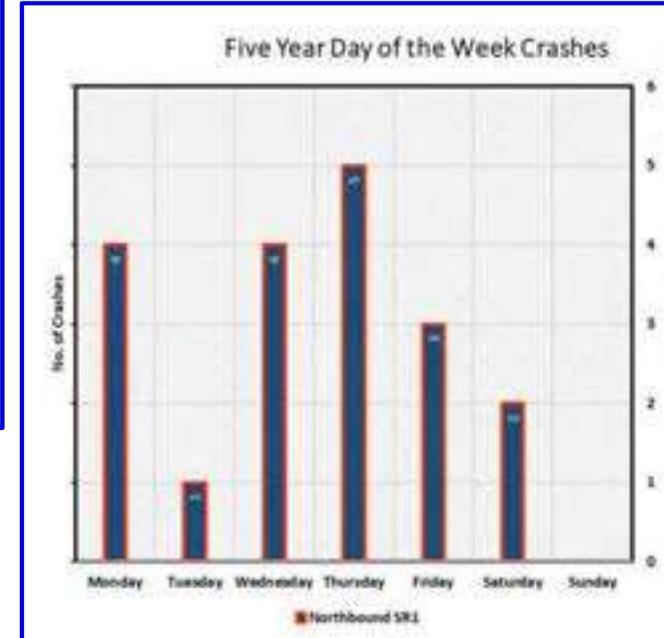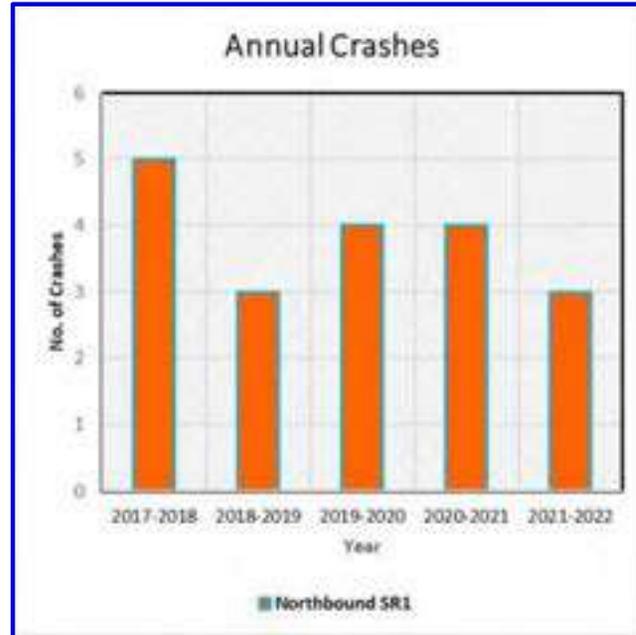

Existing Conditions

- **Crash Rates**
 - Overall the area experiences higher than average crashes
 - 2020 to 2021 comparison shows crash rates are trending down – except SR1 NB

Functional Class	Ratio of 2020 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2020 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	4.70	5.63
Southbound SR1	20.35	24.41
Trap Shooters Rd	39.27	31.65
Barkers Landing Rd	0.00	0.00

Functional Class	Ratio of 2021 Roadway Crash Rate to Similar Roads in Kent County	Ratio of 2021 Roadway Crash Rate to Similar Roads Statewide
Northbound SR1	7.19	7.71
Southbound SR1	11.51	12.33
Trap Shooters Rd	13.45	10.84
Barkers Landing Rd	0.00	0.00

Poll Question #5

- Did you think there would be more crashes on SR1 in the SB direction than in the NB
 - Yes
 - No




Existing Conditions

- No groundwater recharge areas near the study area
- Wells and underground tanks are located in the project area



Existing Conditions

- DNERR is located adjacent to the project site
- The interchange area is identified as a buffer

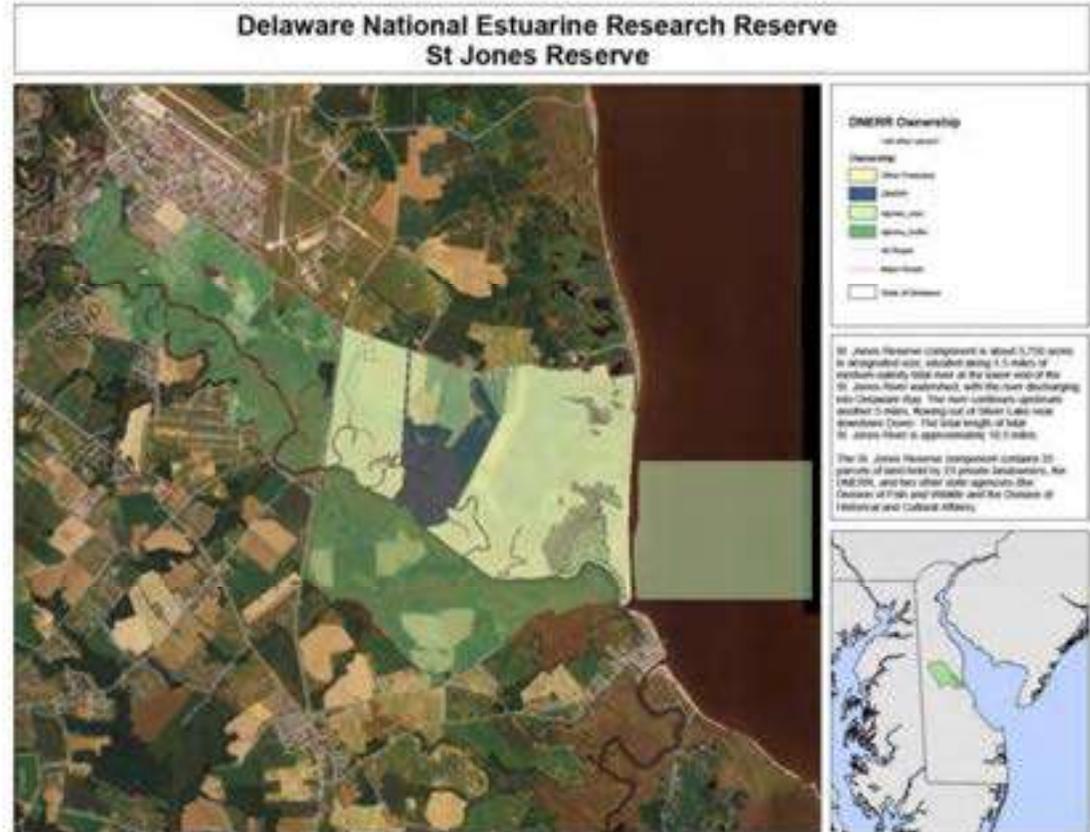

Existing Conditions

- DNREC Protected resources were identified
- The Northern boundary is in a National Estuarine Research Reserve




Existing Conditions

- There are known historic and archaeological resources in the area
- Most of the area is large lot farms



Current DeIDOT Efforts

- CCPP – SR1 Plan Update
 - Public workshops 11/15/2022
- SR1 Capacity Analysis
 - 6/20/2020
 - Triggers the need for a 3rd lane on SR1
 - 2035 - 2045

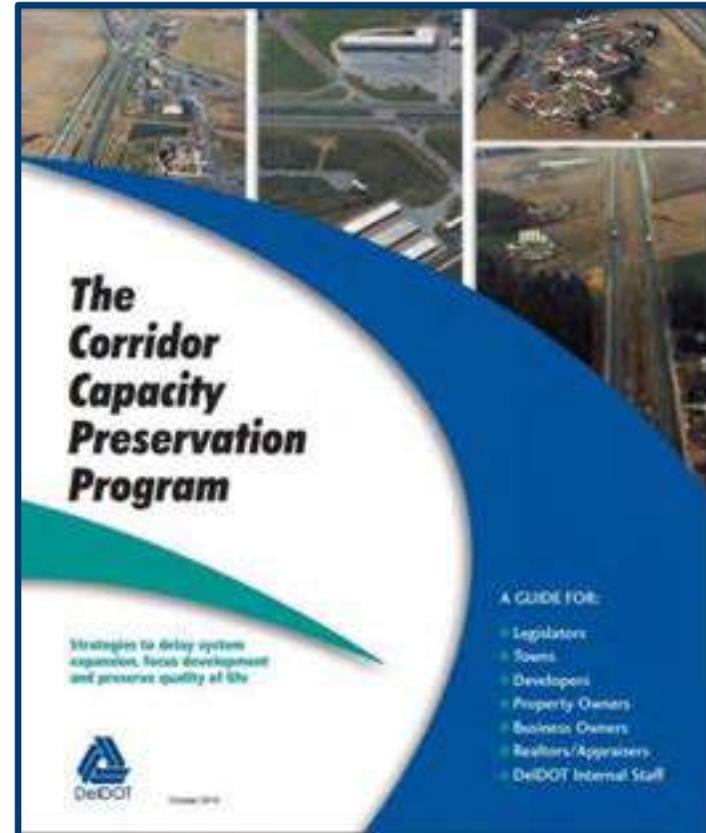

Poll Question #6

- Are you familiar with DeIDOT's Corridor Capacity Preservation Program?
 - Yes
 - No



Current DeIDOT Efforts




Current DeIDOT Efforts



Current DeIDOT Efforts



Schedule

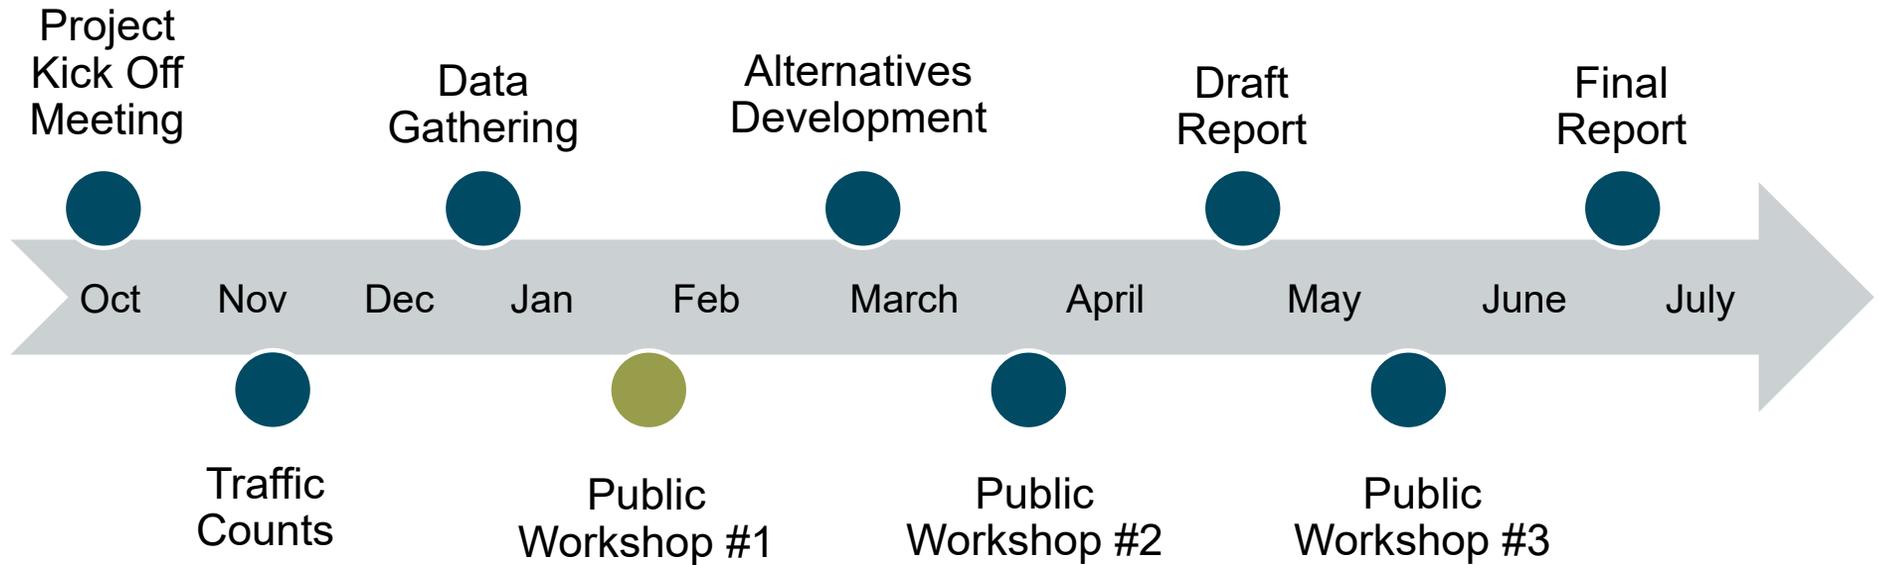



*9 - Raise Hand

*6 - Unmute/Mute



James.Galvin@doverkentmpo.org



<https://doverkentmpo.delaware.gov/projects/>



Jim Galvin
302-387-6030
James.Galvin@doverkentmpo.org



Drew Boyce
302-734-9188
dboyce@kleinfelder.com

Thank You!

Participant List

Attendee Report

Report Generated: 1/24/2023 10:14

Topic	Webinar ID	Actual Start Time	Actual Duration (min)	# Registered
Trap Shooters Road	869 8564 4765	1/23/2023 17:42	88	21

Panelist Details

Attended	User Name (Original Name)	Email	Join Time	Leave Time
Yes	Sonia Marichic	smarichicgoudy@kleinfelder.com	1/23/2023 17:42	1/23/2023 19:09
Yes	Drew Boyce	dboyce@kleinfelder.com	1/23/2023 17:44	1/23/2023 19:09
Yes	MarilynSmith	marilyn.smith@doverkentmpo.org	1/23/2023 18:03	1/23/2023 19:09
Yes	MalcolmJacob	malcolm.jacob@doverkentmpo.org	1/23/2023 17:59	1/23/2023 18:06
Yes	HelenWiles	Helen.wiles@doverkentmpo.org	1/23/2023 17:58	1/23/2023 18:06
Yes	Ted Foglietta	tfoglietta@kleinfelder.com	1/23/2023 18:07	1/23/2023 19:09
Yes	JAMESGalvin	james.galvin@doverkentmpo.org	1/23/2023 18:11	1/23/2023 19:09
Yes	Humaira Yusuf Nabeela	humaira.nabeela@delaware.gov	1/23/2023 18:25	1/23/2023 19:09

Attendee Details

Attended	User Name (Original Name)	First Name	Last Name	Email
Yes	Anne Brown	Anne	Brown	anne.brown@delaware.gov
Yes	Marilyn Smith	Marilyn	Smith	marilyn.smith@doverkentmpo.org
Yes	Ian Peters	Ian	Peters	ipeters61@gmail.com
Yes	Jeffrey Miller	Jeffrey	Miller	Jeffrey_miller@live.com
Yes	Josh Thomas	Josh	Thomas	joshua.thomas@delaware.gov
Yes	James Frazier	James	Frazier	Jrfcrm4@gmail.com
Yes	Malcolm Jacob	Malcolm	Jacob	malcolm.jacob@doverkentmpo.org
Yes	Malcolm Jacob	Malcolm	Jacob	malcolm.jacob@doverkentmpo.org
Yes	Ron Cantrell	Ron	Cantrell	roninorbit@icloud.com
Yes	Helen Wiles	Helen	Wiles	Helen.wiles@doverkentmpo.org
Yes	Helen Wiles	Helen	Wiles	Helen.wiles@doverkentmpo.org
Yes	Helen Wiles	Helen	Wiles	Helen.wiles@doverkentmpo.org
Yes	Ted Foglietta	Ted	Foglietta	tfoglietta@kleinfelder.com
Yes	Rick Mazol	Rick	Mazol	rick@chesapeaketurf.com
Yes	JAMES Galvin	JAMES	Galvin	james.galvin@doverkentmpo.org
Yes	Kristina DeRobertis	Kristina	DeRobertis	kderobertis@wboc.com
Yes	Humaira Yusuf Nabeela	Humaira	Yusuf Nabeela	humaira.nabeela@delaware.gov
No	Breanna	Breanna	Kovach	breanna.kovach@delaware.gov
No	Roger	Roger	McCLean	rpm030650@gmail.com
No	Beau	Beau	Zebley	beau@emeraldc21.com
No	Brian	Brian	Howard	bhmusic302@gmail.com
No	Lisamarie	Lisamarie	Doughten	lisamariedoughten@comcast.net
No	Rigoberto	Rigoberto	Perez	rgbtperez344@gmail.com

Post Workshop Survey

Survey Report

Report Ger 1/24/2023 10:13
Topic Webinar ID Actual Start Time Actual Duration (minutes)
Trap Shoot 869 8564 4765 1/23/2023 17:42 88

Survey Details

#	User Name	User Email	Submitted Time	Do you agree with the purpose and need for this study?	How well do you feel that tonight's workshop provided you the opportunity to share your ideas, thoughts and concerns related to SR1 and Trap Shooters Road Study?	How was the video quality of the workshop?	How was the audio quality of the workshop?
1	Anonymous	Anonymous	1/23/2023 19:11	Yes I agree	I feel good about tonight's meeting	5	5
2	Anonymous	Anonymous	1/23/2023 19:10	yes	Very well, lots of opportunities to comment.	5	5

Trap Shooters Road SR1 Interchange Public Workshop #2

03/28/2023 – Magnolia, DE

The Dover Kent County MPO in partnership with DeIDOT initiated a study to develop and evaluate alternatives at the intersection of SR1 and Trap Shooter Road to improve safety and capacity at this intersection. The initial workshop held on January 23, 2023 was a virtual meeting via Zoom, provided the public with an overview of the existing conditions and solicited comments and feedback from the public on their experience at the intersection and what the design team should be considering as we developed alternatives.

This second workshop presented information on the alternatives developed to meet the purpose and need of the project taking into account the information gained from the first public workshop.

March 28, 2023
6:00 PM – 7:30 PM
McIlvaine Elementary School
Magnolia, Delaware

The public workshop was advertised for approximately 30 days prior to the workshop dates. Flyers and mailers were created and emailed to the elected officials and project partners for posting on their social media and web pages. The workshops were also advertised on the MPO's and DeIDOT's webpage and the State's public meeting calendar. In addition, over 1000 direct mailings were sent out to area residents to let them know about the upcoming workshop.

The workshop format was an in-person open house style information session. There was no formal presentation, but staff personally explained the project to attendees as they arrived. Staff were positioned at four stations to provide additional information on the alternatives presented and to answer any questions. The information presented on the information boards included the following:

- Project Location
- Agenda Purpose and Need Statement
- Vehicle Volume Data
- Crash Data


- Overview of the Alternatives
- Detailed Plans of the 4 Alternatives
- Comparison Matrix
- Anticipated Travel Time and Safety Benefits for Each Alternative

A total of 39 people attended the public workshop. No elected officials attended the workshop. There was a good cross section of people that used the intersection to access SR1. The magnolia fire company had several people attend and provided good feedback on the alternatives presented. The effected property owners were also in attendance and were able to share their opinions on the proposed alternatives.

At the end of the workshop the attendees were encouraged to fill out a comment form and provide their input on the proposed alternatives. Twenty six comment forms were received the night of the workshop.

In general, the feedback received through the formal comment forms and conversations during the public workshop was positive. There was general agreement that changes were needed at the intersection to improve both safety and capacity. There were five comment questions, one asking for an opinion on each of the four alternatives presented, as well as space for additional comments. The 4 alternatives presented included:

- Alternative 1 – Extension of Trap Shooters Road with Wetland Fill
- Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland
- Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange
- Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange

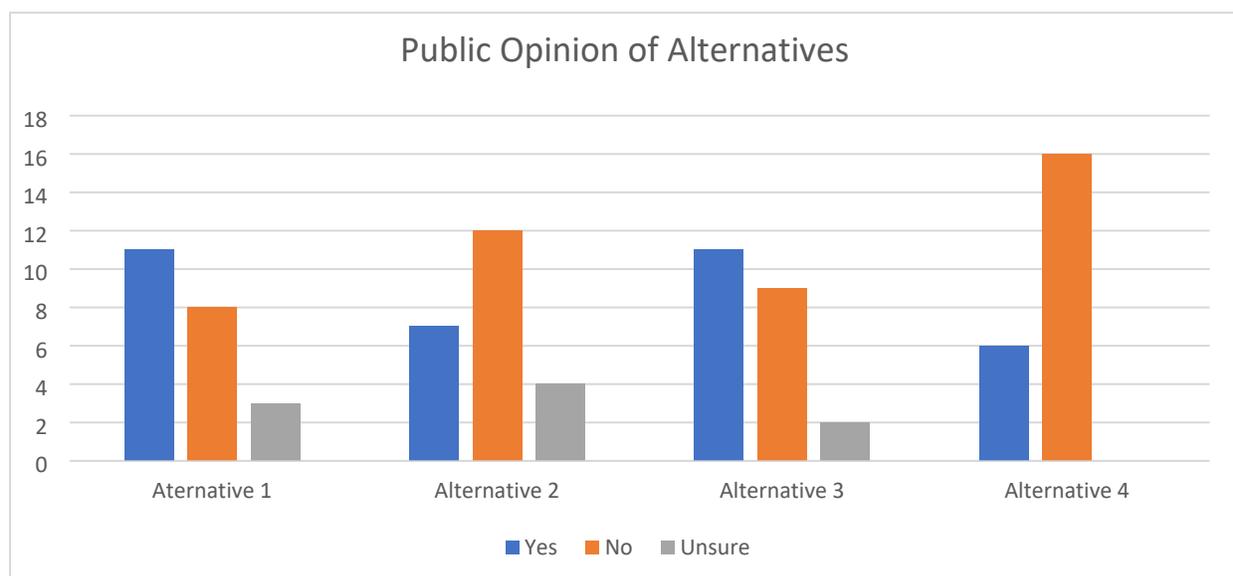

Some of the highlights of public comments include:

- Ramps need to be moved south, all alternatives are an inconvenience
- Reduce speeds on SR1
- Limit how far south you need to go before heading north
- Need temporary signage as an interim improvement
- Don't impact the farm land
- The new overpass options are good
- Need interim improvement

Based on the public opinion Alternatives 2 and 4 received the most support.

After the workshop we received 2 additional e-mails expressing opinions about the alternatives presented at the workshop. There were additional ideas proposed in the e-mails. One was to reinstall the merge lane NB to allow cars to accelerate. This condition was previously removed by DeIDOT for safety reasons. Any addition of an acceleration lane will need to meet AASHTO design requirements. The second email received proposed a tight radius design with a bridge over SR1. This idea would meet the purpose and need, however the geometrics would not need AASHTO design requirements. This alternative would also be more expensive and provide little benefit over Options 1 and 2.

All of the alternatives, including a description of each, are available for review on the MPO website.

The following pages contain the boards presented at the workshop, sign-in sheets and comment forms received.

Flyer and Mailer

SR1 Trap Shooters Road Interchange - Public Workshop #2



Join us for the 2nd public workshop to explore possible solutions to traffic safety



Open house format:
Come anytime to review concepts and ideas and provide your input

We want to hear from you!

March 28, 2023

**McIlvaine Elementary School
11 E. Walnut St.
Magnolia, DE 19962**

6:00pm – 7:30pm



<https://doverkentmpo.delaware.gov/sr-1-trap-shooters-intersection-study-page/>

Display Boards

SR1 and Trap Shooters Road Planning Study

Public Workshop #2 Alternatives



March 28, 2023




Overview of Information Presented Tonight

- Purpose and Need
- Summary of Existing Conditions
- Overview Map
- 4 Alternatives
 - Extend Existing Trap Shooters
 - Extend Existing Trap Shooters with Bridge
 - New Connection with Diamond Interchange
 - New connection with Trumpet Intersection
- Comparison Matrix
- Schedule




Purpose and Need

- Purpose
 - Improve safety and capacity at the intersection of SR1 and Trap Shooters Road
- Need
 - The intersection is experiencing high crash rates
 - The intersection reducing the overall capacity of SR1

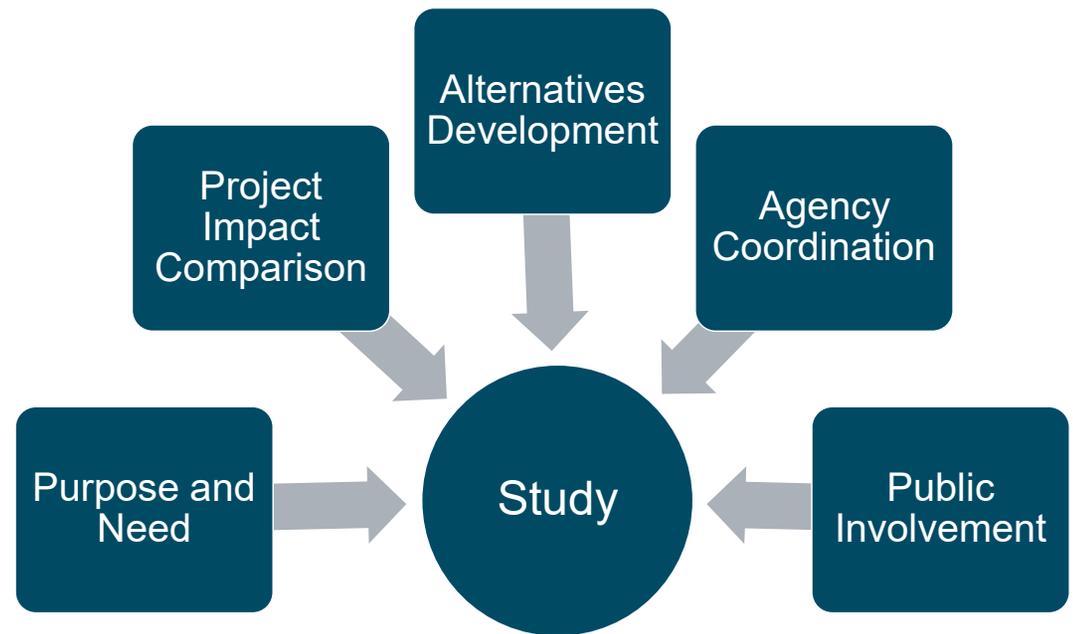


Process

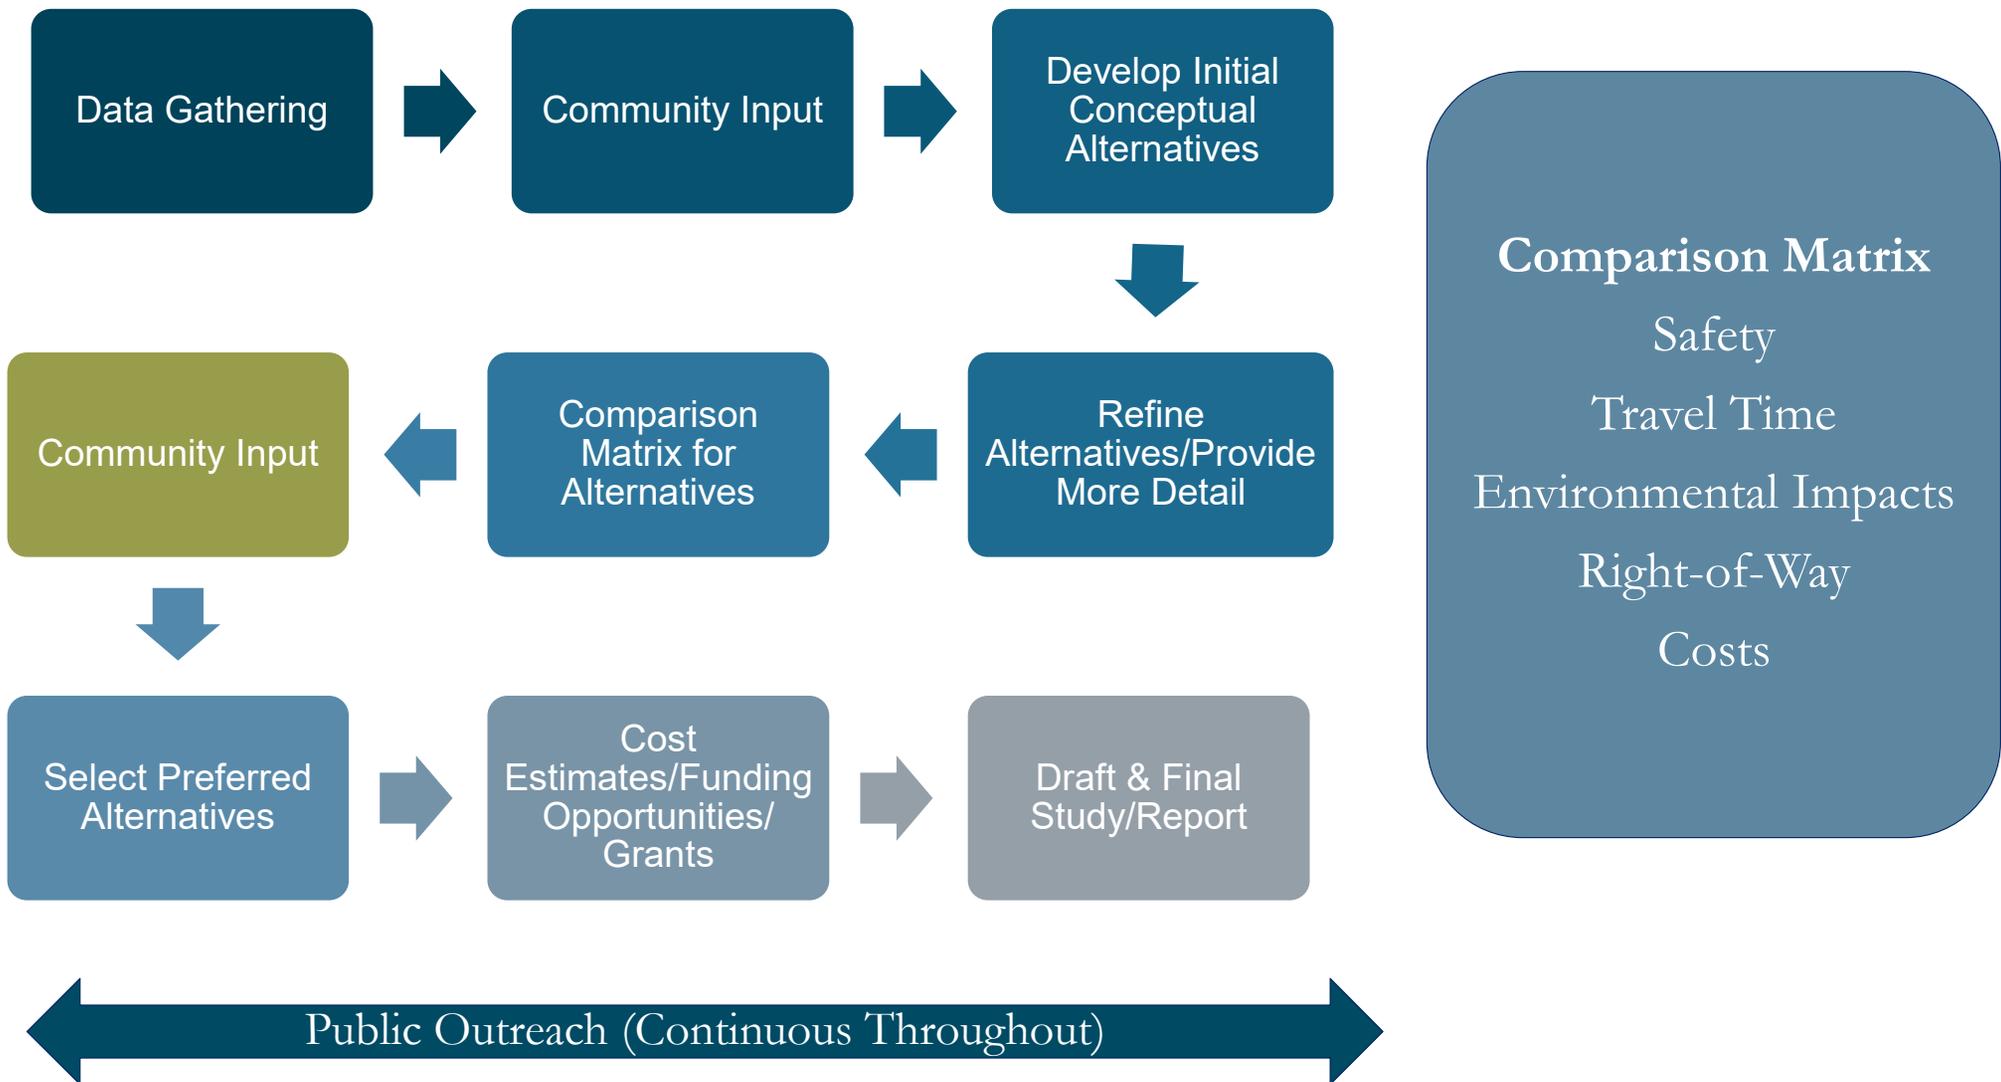



Existing Conditions

Non summer peak hour turning movements

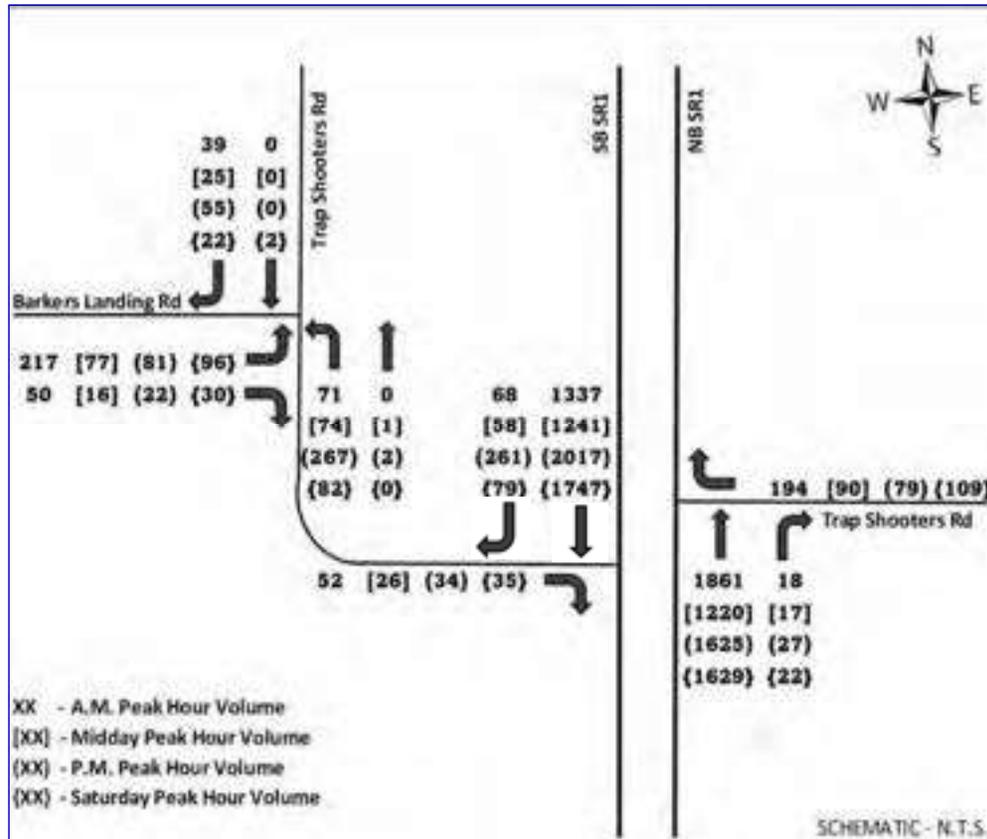


Summer Saturday peak hour turning movements

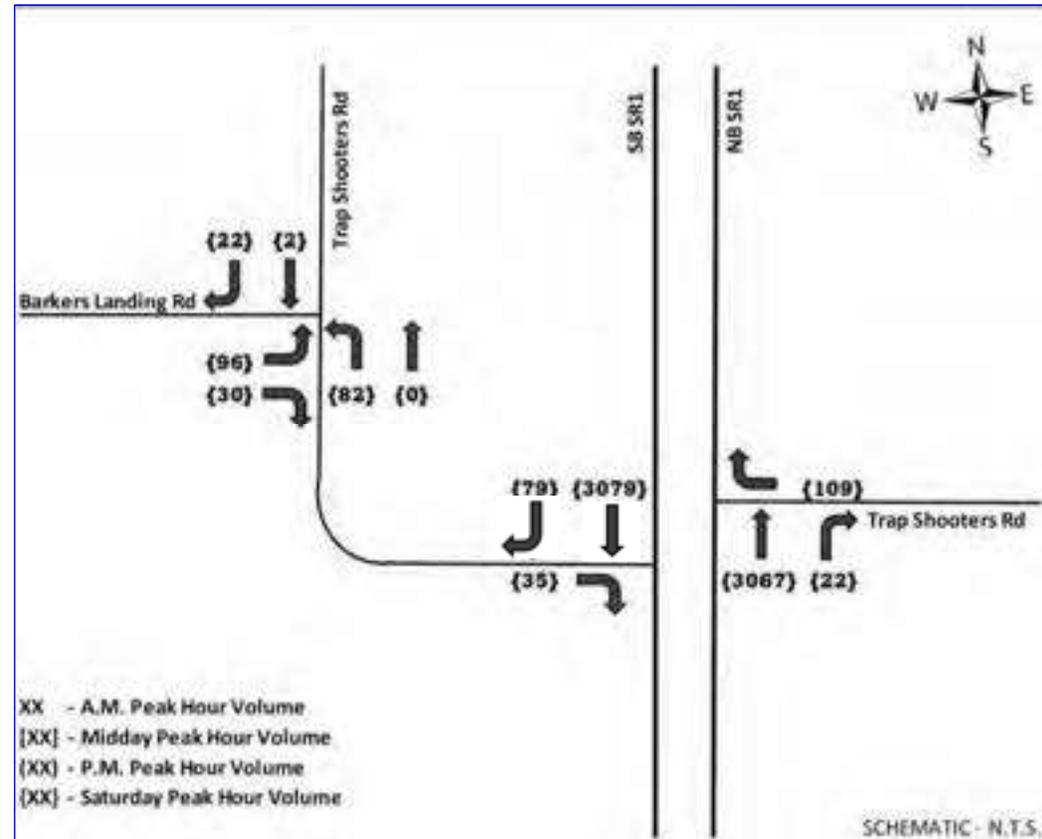

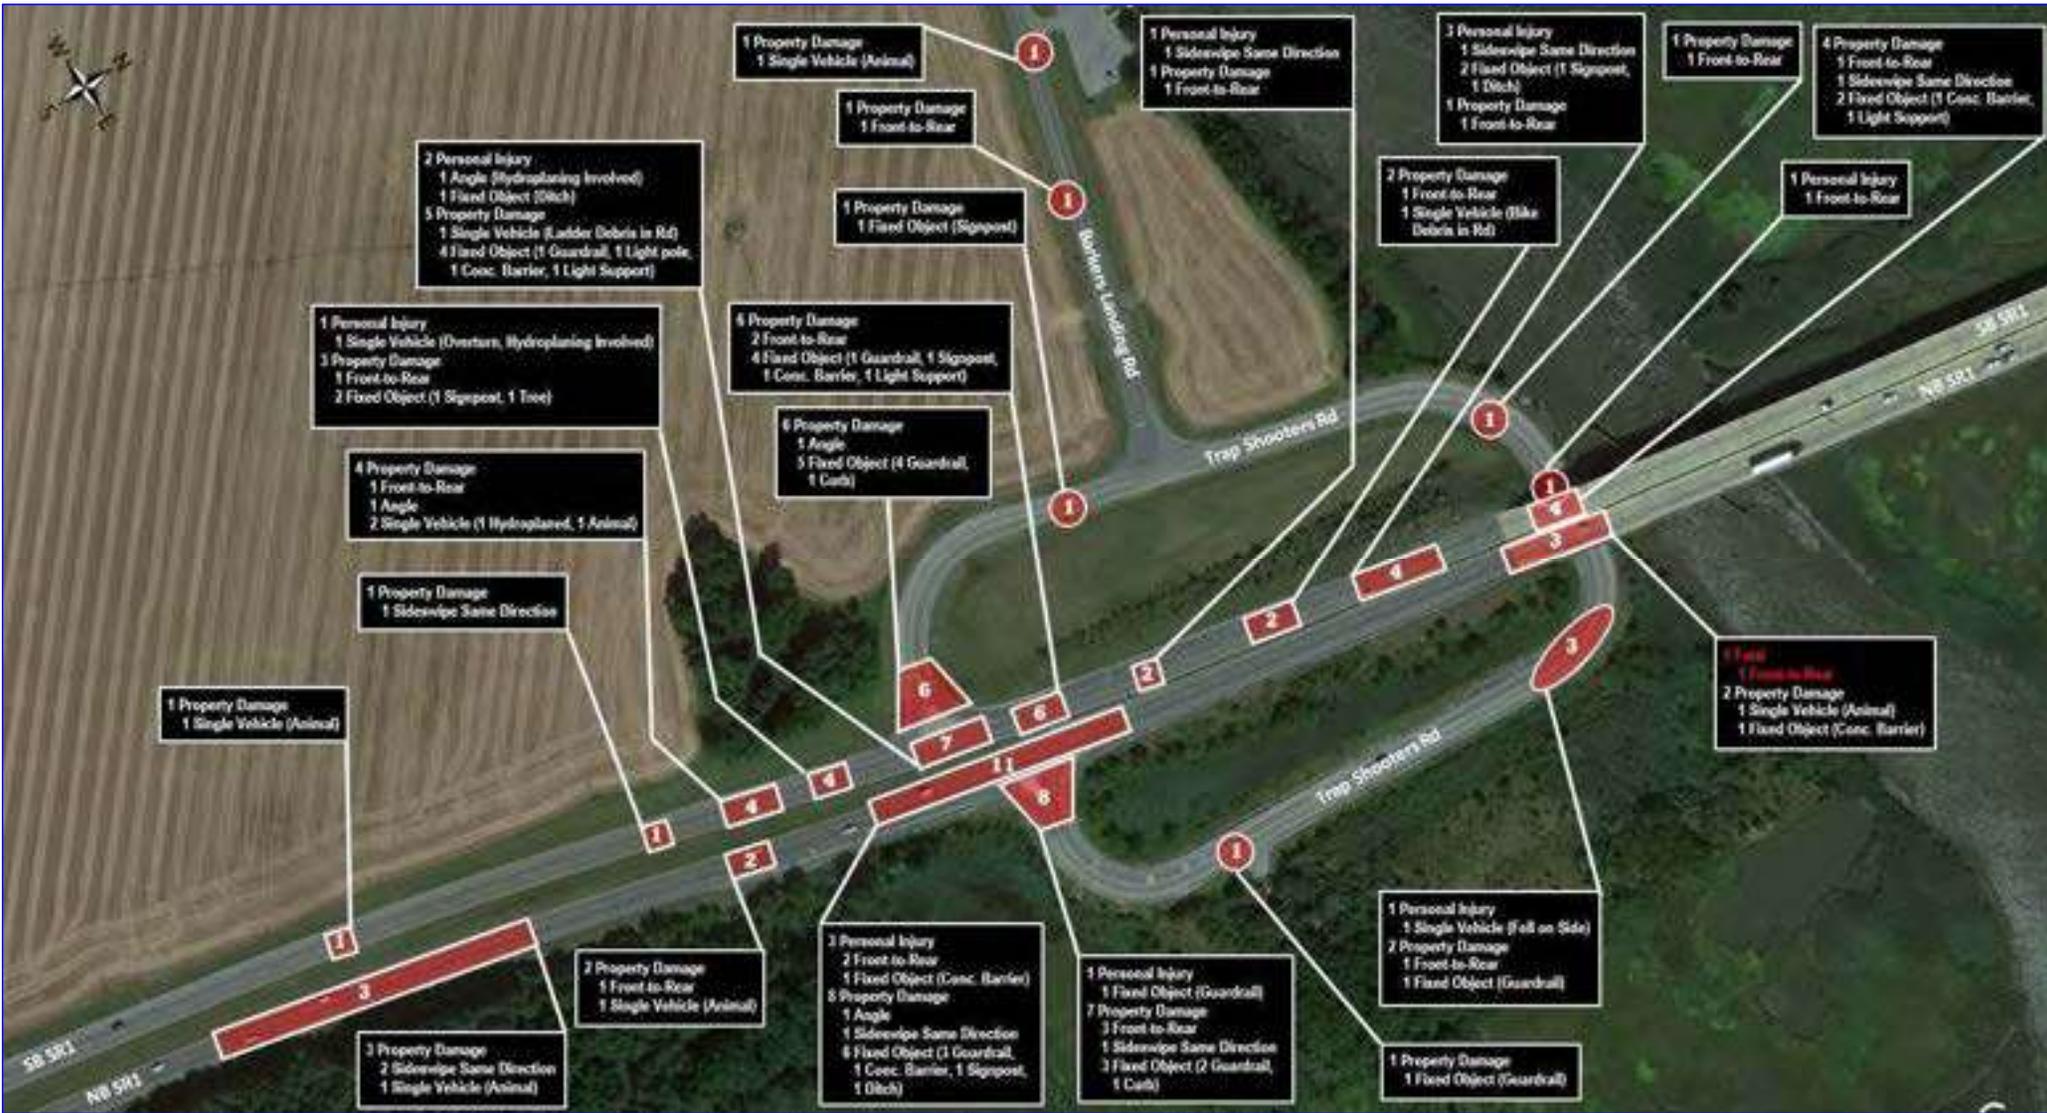

Existing Conditions


Annual Crashes

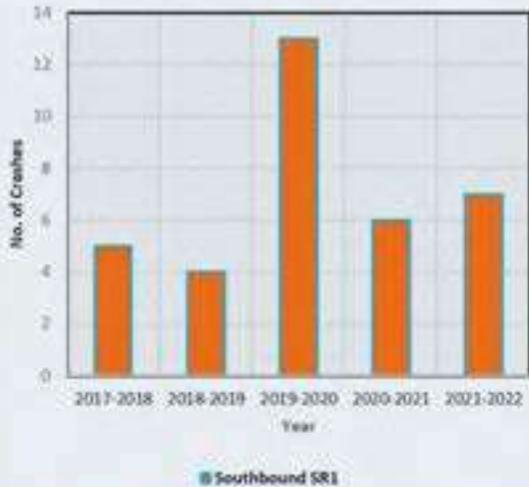


SR1 Southbound Crashes

- Total of 35 crashes
- 2020 experienced an abnormally high number of crashes
- Friday has a higher number of crashes

Annual Crashes

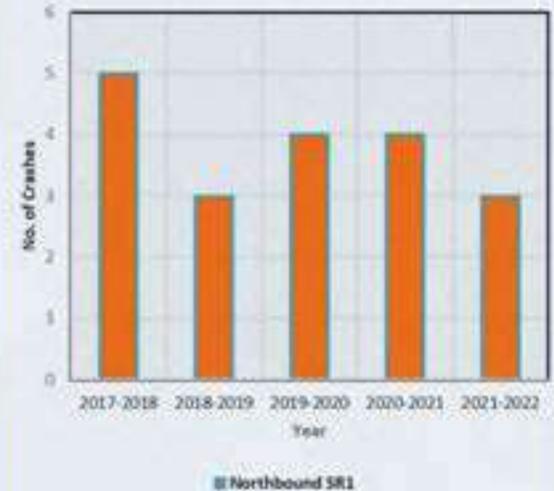


Five Year Day of the Week Crashes

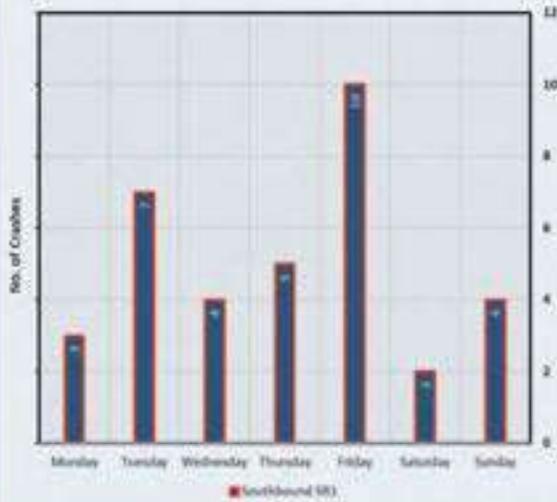

SR1 Northbound Crashes

- Total of 19 crashes
- Relatively consistent number of crashes across the 5 years

Five Year Day of the Week Crashes

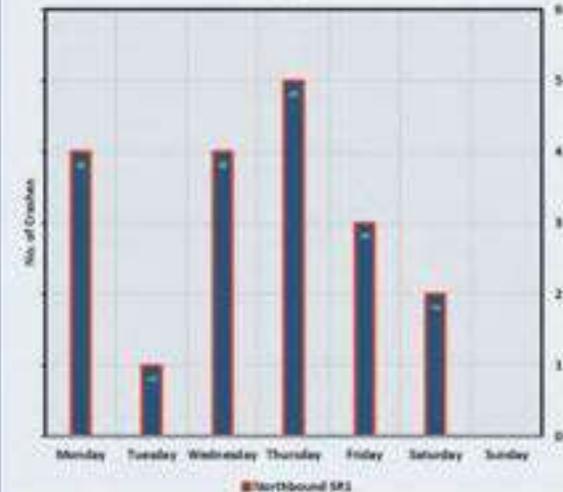

TRAP SHOOTERS ROAD - ALTERNATIVES OVERVIEW



ALTERNATE 2 - TRAP SHOOTERS ROAD EXTENDED W/ BRIDGE



ALTERNATIVE 3 - SPUR ROAD WITH DIAMOND INTERCHANGE




ALTERNATIVE 3 - SPUR ROAD WITH DIAMOND INTERCHANGE



ALTERNATIVE 4 - SPUR ROAD WITH TRUMPET INTERCHANGE



ALTERNATIVE 4 - SPUR ROAD WITH TRUMPET INTERCHANGE

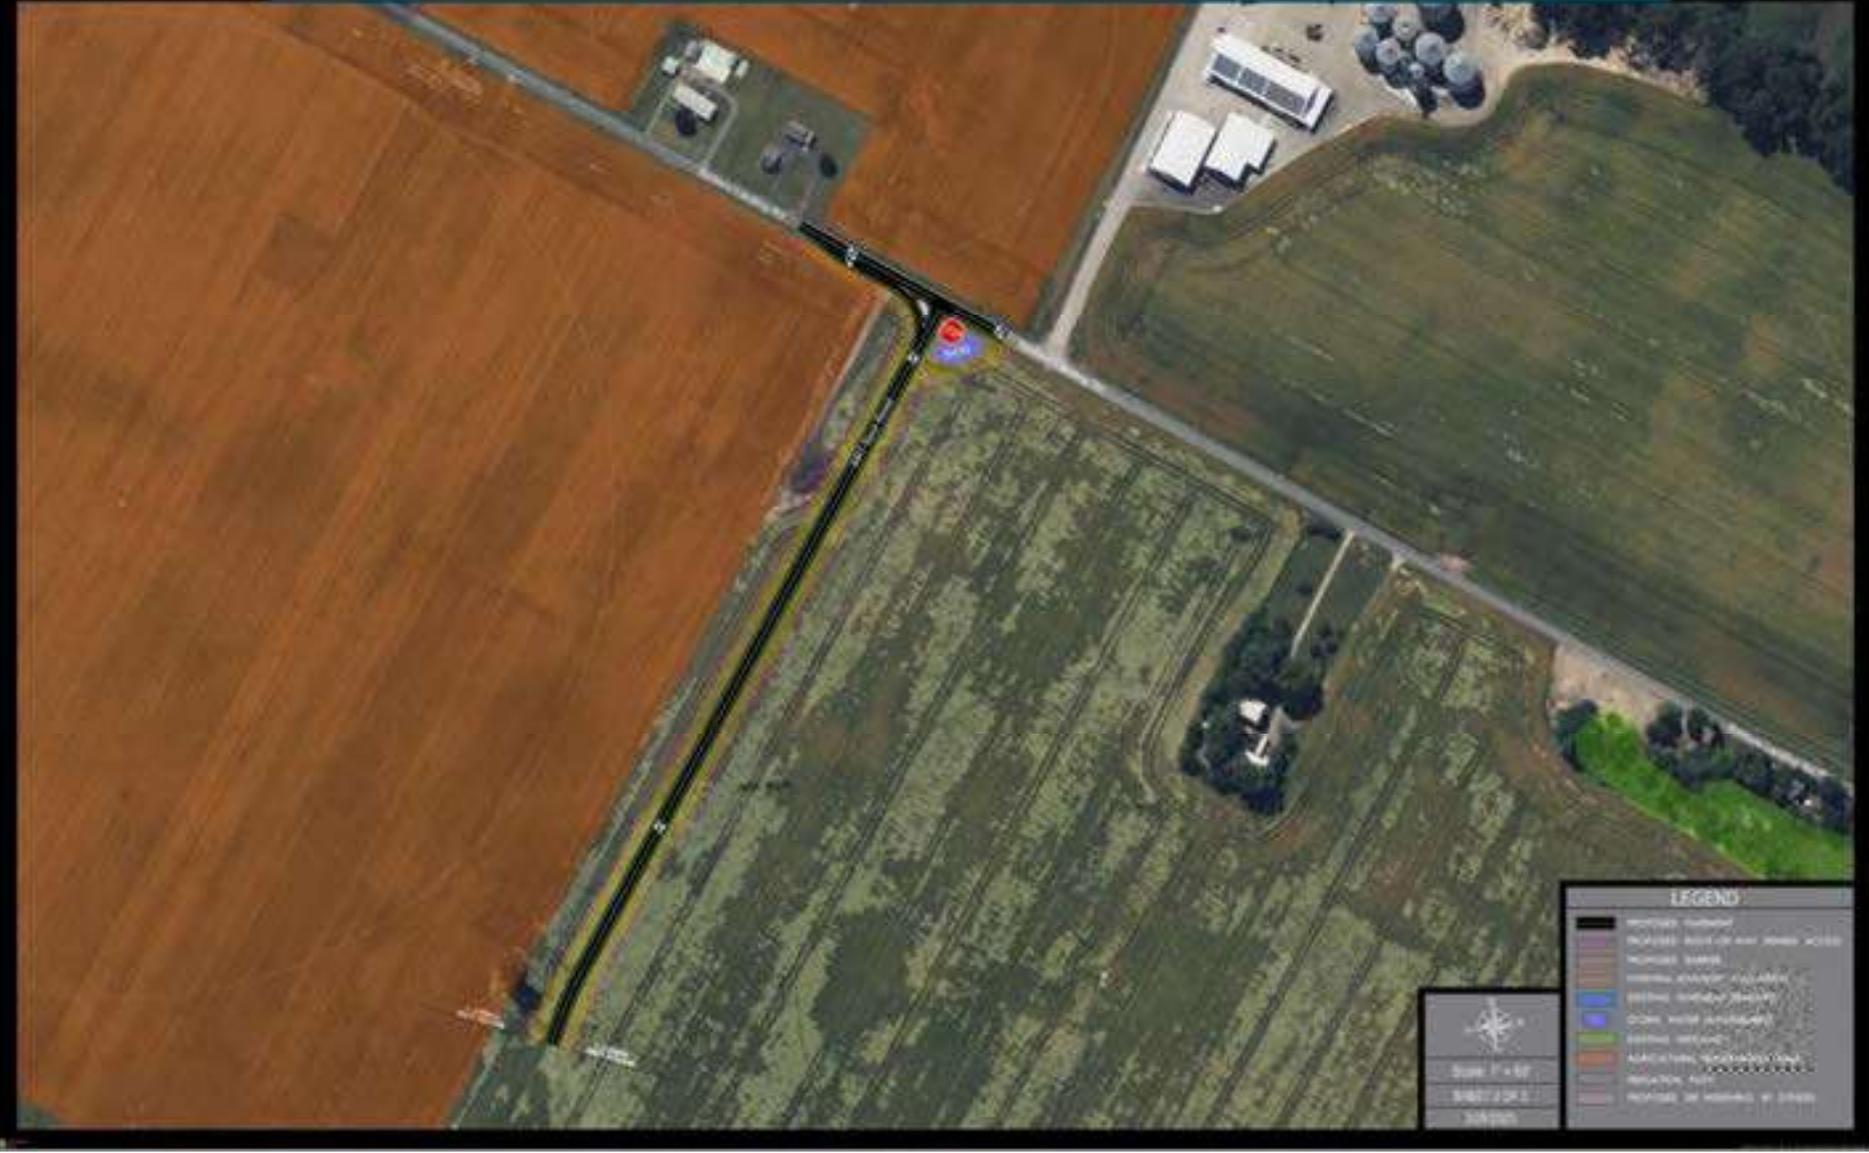

Alternatives Comparison Matrix

SR1 Trap Shooters Road Interchnage Study									
Measures of Effectiveness - Physical Impacts									
Measure	UOM	Move SR1 Access Points South No Bridge		Move SR1 Access Points South With Bridge		Alternate 3 New Spur Road to SR1 with Diamond Interchnage		Alternate 4 New Spur Road to SR1 with Trumpet Interchnage	
		Wetland Impacts Permanent	Square Feet / Ac	10,155	0.23	786	0.02	0	0.00
Wetland Impacts Temp	Square Feet / Ac	0	0.00	6,621	0.15	0	0.00	0	0.00
Forested Land Impacts	Square Feet / Ac	278,036	6.38	287,930	6.61	357,621	8.21	326,427	7.49
Agricultural Land Impacts	Square Feet / Ac	164,408	3.77	164,408	3.77	549,855	12.62	558,526	12.82
Ag. Land Preservation Impacts	Square Feet / Ac	0	0.00	0	0.00	5,294	0.12	5,294	0.12
Irrigation Impacts	Square Feet / Ac	10,482	0.24	10,482	0.24	123,248	2.83	123,248	2.83
Right-of-way Area	Square Feet / Ac	519,455	11.93	553,971	12.72	919,292	21.10	969,772	22.26
Costs	Thousands Dollars	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

Alternatives Comparison Matrix

Crash Reduction Benefits Due to Project (All Alternatives)

	No. of Vehicles involved in Property Damage Crashes	Injury Crashes	Fatal Crashes	Total Annual Crash Reduction Benefit
2018 through 2021 Calendar Years*	72	11	1	
Crash Modification Factor (CMF)	0.84	0.84	0.84	
Crashes after Project	60.48	9.24	0.84	
Annual Crash Reduction	15.12	2.31	0.21	
USDOT Monetized Value per crash**	\$4,800.00	\$307,800.00	\$13,046,800.00	
Annual Crash Reduction Benefit	\$72,576.00	\$711,018.00	\$2,739,828.00	

* Excluding Crashes with animals as they are not susceptible to reduction with any geometric changes

** 2021 Base Year Dollars


Travel Time Change with Magnolia Origin-Destination

Travel Time Change (Seconds)	Alt 1 Geometry				Alt 2 Geometry				Alt 3 Geometry				Alt 4 Geometry			
	Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip	
	Inbound	Outbound	Inbound	Outbound												
XX = Increase; (XX) = Decrease	11.7	20.6	12.5	6.7	0.2	9.2	9.7	5.7	(72.8)	(72.4)	13.3	(47.5)	(71.9)	(53.2)	12.7	(47.3)

Travel Time Change with Ponderosa Drive Origin-Destination

Travel Time Change (Seconds)	Alt 1 Geometry				Alt 2 Geometry				Alt 3 Geometry				Alt 4 Geometry			
	Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip		Northbound Trips		Southbound Trip	
	Inbound	Outbound	Inbound	Outbound												
XX = Increase; (XX) = Decrease	11.7	20.6	12.5	6.7	0.2	9.2	9.7	5.7	(22.6)	(15.9)	63.5	9.0	(21.7)	4.5	62.6	10.4

Schedule

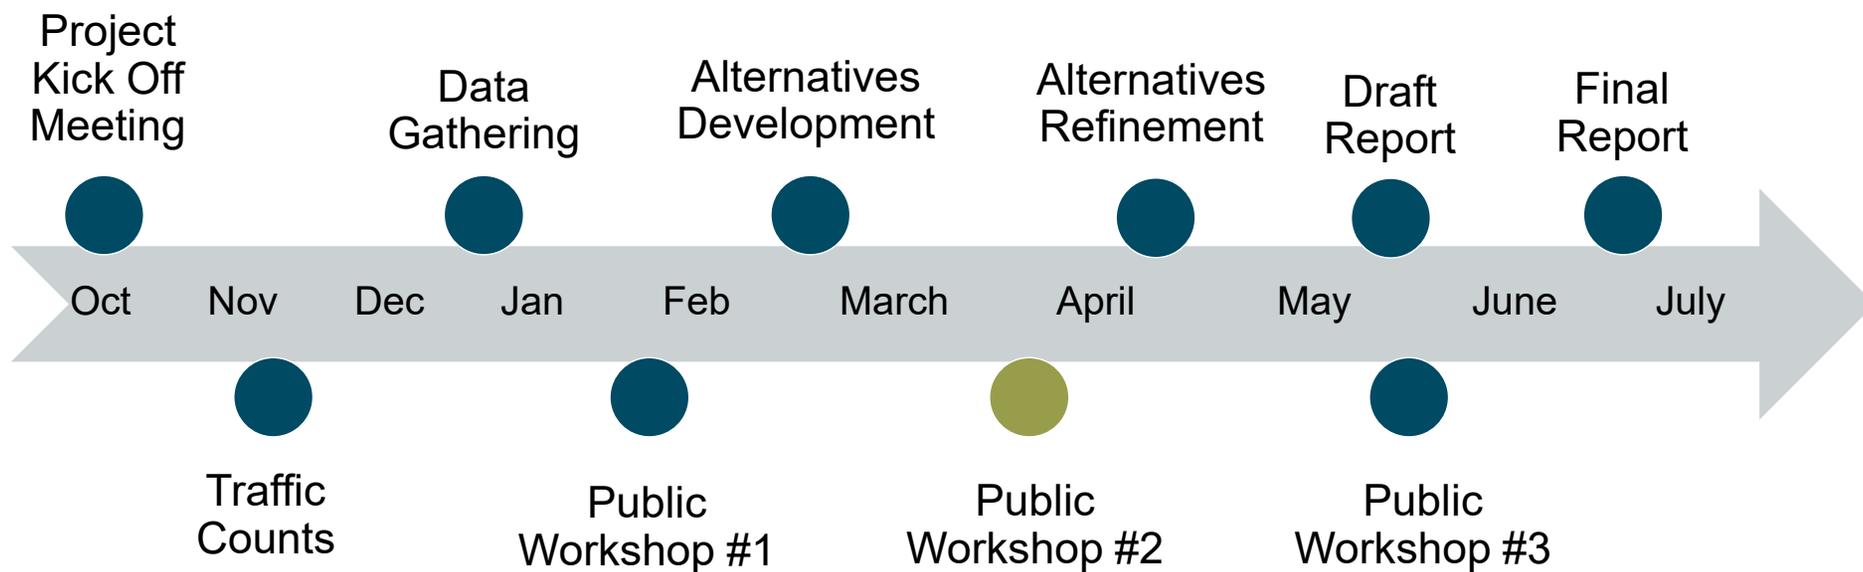



<https://doverkentmpo.delaware.gov/sr-1-trap-shooters-intersection-study-page/>



Jim Galvin
302-387-6030
James.Galvin@doverkentmpo.org



Drew Boyce
302-734-9188
dboyce@kleinfelder.com

Thank You!

Thank you for taking the time to participate in today's community workshop.

Your comments are important to us and will be considered along with comments from government and regulatory agencies. Safety and operational requirements will also be considered.

Therefore, while all comments are considered, some comments may not be incorporate into the project.

Thank you again for your participation.

Please remember to complete the survey before you leave tonight.

**Thank
You!**

Sign in Sheets

**SR1 / Trap Shooters Road Interchange Study
Public Workshop 2**

March 28, 2023



Magisto 1.0

	Name	Address	Phone
1	Ralph Doherty Sr. Retired	2449 Woodlytown Rd KIDAS33@comcast.net	302 270 4724
2	Nyan Buff Fire chief Magnolia	411 W Birch Ln, Magnolia, DE 19968 2203 Ponderosa Dr Magnolia DE 19962 Greenbldeirrigation@gmail.com	302-535-0064
3	Todd Burger	1266 woodlytown Rd magnolia DE 19962	302-270-8417
4	Robert Helmer Magnolia Fire Co	4758 South Side Street magnolia 19962 1850 197A End. Com	302-532-8126
5	Robert Ojemiller	49 JESTER Dr Paraymes62@hotmail.com	302-617-2367
6	Patrick Raymond	1578 MCGINNIS FORD RD, MAGNOLIA, DE /WILLIAMS1@GMAIL.COM	302 399 1041
7	LADOG WILSON		302-222-4006

**SR1 / Trap Shooters Road Interchange Study
Public Workshop 2**

March 28, 2023



Name	Address	Phone
8 Paula Zimmerman Organization	696 Plain Dealing Road, Magnolia, DE Email Address: CZ111252@AOL.COM	(302) 724-0062
9 John Sgro Organization	192 BAY HILL ROAD MAGNOLIA DE Email Address: SGROJ@OUTLOOK.COM	973 945-8531
10 RON CANTRELL Organization	38 N MAIN ST MAGNOLIA DE BOX 67 Email Address: RONINORBITE@ICLOUD.COM	302 222 1351
11 Roberto Perez Organization	17 S MAWLD ST MAGNOLIA Email Address: robertperez34@gmail.com	302 399 1929
12 James Frazier Organization	37 S. MAIN ST. Email Address: jfrantz@gmail.com	302-947-1099
13 JANE M. PILET Organization	130 QUAKER HILL RD MAGNOLIA Email Address: JPALETO@COMCAST-NET	302-698-0349
14 Khyllis Green Organization	110 MASTERS LANE Email Address: GREEN110@COMCAST.NET	201-280-8317

SR1 / Trap Shooters Road Interchange Study
Public Workshop 2

March 28, 2023



	Name	Address	Phone
15	Brian Howard Organization	9 S Main St Magnolia Email Address	302-310-2055 Phone
16	Talita Vitor Organization	275 Main St Magnolia Email Address	302 270.2325 Phone
17	Ros + MAUREEN REID Organization	241 NICKLAUS LANE MAGNOLIA DE 19962 Email Address	302-270-8670 Phone
18	Shari Cravy Organization	178 Plaudensley Road Magnolia Email Address	302-697-8793 Phone
19	Scott Vardard Organization	99 Big Hat Lane Email Address	(302) 270 - 7942 Phone
20	Mike Hershberger Organization	602 plaudensley RD Magnolia DE Email Address	302 270-2853 Phone
21	Patricia Cerchio Organization	763 Augusta National Magnolia Email Address	302-387-1309 Phone

SR1 / Trap Shooters Road Interchange Study
Public Workshop 2

March 28, 2023



50 22	Name Eileen O'Connell Organization Eileen O'Connell	Address 553 Wekivawo Lane, Magnolia Email Address EileenOConnell@msn.com	Phone 302-697-1542
51 23	Name ED MARVEL Organization Ed Marvel	Address 403 BARBERS LANE Email Address EdMarvel@comcast.net	Phone 302-352-1077
52 24	Name Bernie Sarnoski Organization Bernie Sarnoski	Address 787 Augusta National Drive, Magnolia Email Address Fudgeclay@comcast.net	Phone 302-331-5882
53 25	Name Mona Bennett Organization Mona Bennett	Address 36 N. Maple St., Magnolia, DE Email Address MonaBennett@aol.com	Phone 302-535-8478
54 26	Name ROSE CRANE Organization Rose Crane	Address 100 CHERRY HILL RD, MAGNOLIA Email Address RoseCrane@comcast.net	Phone 302-698-0443
55 27	Name Patrice Hartung Organization Patrice Hartung	Address 767 Windrow Way Magnolia DE Email Address dsterling@aol.com	Phone 302-284-3316
56 28	Name Kate Meire Organization Kate Meire	Address 804 BUNKER HILL RD MAGNOLIA, DE 19962 Email Address kate@comcast.net	Phone 302-698-0443

SR1 / Trap Shooters Road Interchange Study
Public Workshop 2

March 28, 2023



29	Name Brandon Bent Organization Bent Farms	Address 472 Barkers larkes RD Magnolia	Phone 302 542 2431
30	Name Dorie Redding Organization	Address 475 Concessionary St, Magnolia Email Address pdr@dedyahoo.com	Phone 603-918-0403
31	Name Judi & Carl Cioppo Organization	Address 99 Cherry Hill Rd, Magnolia Email Address	Phone 302-697-3630
32	Name Lisamarie Doughten Organization	Address 458 Tullamore Rd. Email Address Magnolia De 19962	Phone 302-363-9947
33	Name Patty Webb Organization	Address 151 Quaker Hill Ad Magnolia, De Email Address pattiswebb@gmail.com	Phone 302-382-1179
34	Name Rebecca Campbell Organization	Address 21 N. MAIN ST Magnolia, De Email Address	Phone 856 207 4896
35	Name Amy Zote Organization	Address 13 S. main St Magnolia Email Address Le20710@yahoo.com	Phone —

**SR1 / Trap Shooters Road Interchange Study
Public Workshop 2**

March 28, 2023



54 36	Name Ron Webb	Address 151 Quaker Hill Rd Magswade	Phone 302-222-0551
	Organization R Webb @ ezol.com		
56 37	Name David Nicol	Address 14U Renee Dr. Fethen DE	Phone 302-382-9848
	Organization		
59	Name		
	Organization		
60	Name		
	Organization		
61	Name		
	Organization		
62	Name		
	Organization		
63	Name		
	Organization		

Comment Sheets



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: *JUDI CACIOPPO*
 Address: *99 CHERRY HILL RD, MARGISO/IA, DE 19962*
 Email: *STARSPRO @ AOL.COM*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: *Keliph Saltoufield*
 Address: *2419 Woodlawn Rd* *Maguire*
 Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:
James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Length of north Road off Ramp to Trap Shooter Road. widen bridge to leather south of SR1 and north on ramp

Additional Comments: (please use the back of this form if you need additional space)

Reduce speed on Rt 1 to 35 miles an hour

Please provide your contact information to stay informed about this project:

Name: Robert Overmiller
 Address: 4759 South State Street, Magnolia DE 19962
 Email: ROO1979@Aol.com

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
A. Yes
B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
A. Yes
B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
A. Yes
B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
A. Yes
 B. No
C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name:

Address:

Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)
CVIRRENT SIVAGE - NORTH & SOUTH OF RT 1 -
IS POSS

Please provide your contact information to stay informed about this project:
 Name: DAVID READING
 Address: 47 CONROSSHOWE CT., HUNTSVILLE
 Email: PREAD@yahoo.com

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:
James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 - A. Yes
 - B. No
 - C. Unsure
2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 - A. Yes
 - B. No
 - C. Unsure
3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 - A. Yes
 - B. No
 - C. Unsure
4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 - A. Yes
 - B. No
 - C. Unsure
5. Is there another configuration for the corridor you prefer?
If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Safety

Cost Spenders? There is NO mention

Please provide your contact information to stay informed about this project:

Name: *J. Green*
 Address: *110 W. Main St. Dover*
 Email: *green110@comcast.net*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
A. Yes
 B. No
C. Unsure
2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
A. Yes
 B. No
C. Unsure
3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
A. Yes
 B. No
C. Unsure
4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
A. Yes
 B. No
C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

THE RAMP'S NEED TO BE MOVED SOUTHWARD TO ALLOW
SOUTHBOUND DECELERATION AND NORTHBOUND ACCELERATION.
ALL OF THE PROPOSED SOLUTIONS ARE AN INCONVENIENCE
TO RESIDENTS.

Additional Comments: (please use the back of this form if you need additional space)

I SUGGEST A FLYOVER FROM BARKERS LANDING RD TO SOUTHBOUND
SR1.

Please provide your contact information to stay informed about this project:

Name: ROGER CRAIG
Address: 100 CHERRY HILL RD. MARRIETTA
Email: ROG197@GMAIL.COM

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 - A. Yes
 - B. No
 - C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 - A. Yes
 - B. No
 - C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 - A. Yes
 - B. No
 - C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 - A. Yes
 - B. No
 - C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Until then "SILVAGE ALARMS TRAFFIC TO BE
CARRIERS OF MARGING TRAFFIC"

Please provide your contact information to stay informed about this project:

Name: Maria C Bennett
 Address: POB 77, 36 W. Main St., Magnolia, DE 19962
 Email: MariaCBennettReactor@gmail.com

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:
James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

I don't want to go far south before going north

Please provide your contact information to stay informed about this project:

Name: *Paula Zimmerman*
 Address: *686 Maindealing Road, Magnolia DE 19962*
 Email: *CZ111252@AOL.com*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 B. No
 A. Yes
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

If you want to spend an excessive amount of money we need ADA compliant sidewalks in mainline. New water pipes, roads fixed and trucks to be prohibited through town.

Please provide your contact information to stay informed about this project:

Name: *Rebecca Campbell*
 Address: *21N. MAIN ST Magnolia De 19962*
 Email: *BS1020741896*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

- 1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

- 2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

- 3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

- 4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

- 5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

FOR NB RT 1, AS AN INTERIM MEASURE, PLACE SIGNS IN ADVANCE OF EXIST TRAPSHOOTERS ON RAMP THAT SAY " ~~NO~~ TRAFFIC ENTERING FROM THE RIGHT" TO HELP W/ TRAFFIC TRYING TO ENTER AND AVOID ON RAMP @ BRIDGE.

Please provide your contact information to stay informed about this project:

Name: LANCE WILGUS
 Address: 1578 MCGINNIS POND RD, MCGONUA, DE 19962
 Email: LWILGUS1@GMAIL.COM

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: PATRICK RAYMOND
 Address: 49 JOSHUA DR MAGNOLIA DE 19962
 Email: PR.RAYMOND62@HOTMAIL.COM

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

 Signs for "Merging" For Now

Additional Comments: (please use the back of this form if you need additional space)

 DO NOT Go Thru the Farm LANDS

Please provide your contact information to stay informed about this project:

Name: SAMARIE DOUGHTEN
 Address: 458 TULLAMORE Rd MAGNOLIA DE 19962
 Email: _____

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name:

Address:

Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

*Better Hwy Sign hope better than
 Dover beach signs*

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: *Roberto Perez*
 Address: *17 Sycamore St Magnolia*
 Email: *RobertoPerez344@gmail.com*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

*Like the proposed overpass with alternative 3.
 I think this would be the best option*

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: *Maureen Rob*
 Address: *247 Dicklans Lane, Magnolia*
 Email: *maureen@thekobs.net*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 - A. Yes
 - B. No
 - C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 - A. Yes
 - B. No
 - C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 - A. Yes
 - B. No
 - C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 - A. Yes
 - B. No
 - C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: *Colton Vartan*
 Address: *775 Main St Maryland DE*
 Email: *ColtonV8423@gmail.com*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes *ok to bridge wetland ^{on west side} to avoid mitigation - bridge that wetland if necessary - see blue sticky*
 B. No
 C. Unsure
2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No *Farmer suggested*
 C. Unsure
3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure
4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: _____

Address: _____

Email: _____

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:
James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?

- A. Yes
- B. No
- C. Unsure

Biggest concern is New trap Shooters have speed enforcement

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?

- A. Yes
- B. No
- C. Unsure

Bridge will be too expensive

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?

- A. Yes
- B. No
- C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?

- A. Yes
- B. No
- C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Have we learned anything from the Wyoming Spur @ Row MIA.

Please provide your contact information to stay informed about this project:

Name:

Address:

Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 - A. Yes
 - B. No
 - C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 - A. Yes
 - B. No
 - C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 - A. Yes
 - B. No
 - C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 - A. Yes
 - B. No
 - C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name: Mike Hershberger
 Address: Gosple Indenting RD Magnolia DE 19962
 Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner

james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 - A. Yes
 - B. No
 - C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 - A. Yes
 - B. No
 - C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 - A. Yes
 - B. No
 - C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 - A. Yes
 - B. No
 - C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

My 2nd choice is the 2

Please provide your contact information to stay informed about this project:

Name: *Patricia Cerchi*
 Address: *763 Augusta National Magnolia*
 Email: *patricia@patricia-vieira.com*
pat@navy.wn.com

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?

- ① A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?

- ③ A. Yes
 B. No
 C. Unsure *worry about speeding to get to the entrance to NB1*

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?

- ② A. Yes
 B. No
 C. Unsure *I like the budge but dont like taking away the farmers land.*

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?

- ④ A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Thanks for having this I hope our community shows up to use their voice!

Please provide your contact information to stay informed about this project:

Name: *Amy Zook*
Address: *135 main St Magnolia*
Email: *LeB770@yahoo.com*

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 - A. Yes
 - B. No
 - C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 - A. Yes
 - B. No
 - C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 - A. Yes
 - B. No
 - C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 - A. Yes
 - B. No
 - C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name:

Address:

Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner


james.galvin@doverkentmpo.org - Ph: 302.387.6030

1783 Friends Way, Ste 3, Camden, DE 19934

<http://www.doverkentmpo.org>

Samia's notes

Need interim improvements
if these alternatives don't
have funding

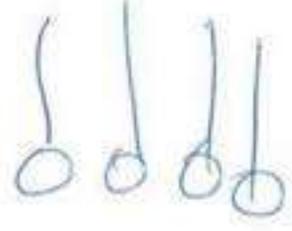- ① Need merge ahead signs so people
on SR1 know to move over - This
is done very well in Milford
- ② Everyone ignores signs do something more
- ③ Why no interim alts?
- ④ Why do you make me face straight out
when I need to go right - you made
things worse
- ⑤ DO ANY of these NOW 



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2

March 28, 2023

Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
If so, please describe: (please use the back of this form if you need additional space)

Additional Comments: (please use the back of this form if you need additional space)

NEW SIGNAGE NOW would Be VERY HELPFUL
UNTIL THE CONSTRUCTION STARTS.
SEE BACK FOR SOME IDEAS

Please provide your contact information to stay informed about this project:

Name: John Sgro
Address: 192 BAY HILL ROAD MAGNOLIA DE
Email: SGROJ@OUTLOOK.COM

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>

~~Signage~~

Signage :

- 1) LARGER MAGNOLIA EXIT SIGNS
BOTH WAYS AND A BIT
EARLIER THAN THE CURRENT
SIGNS (WHICH COULD REMAIN)
- 2) CAUTION
MERGING TRAFFIC SIGNS
ON RT 1 NORTH AND SOUTH



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?

If so, please describe: (please use the back of this form if you need additional space)

See Back


Additional Comments: (please use the back of this form if you need additional space)

Please provide your contact information to stay informed about this project:

Name:
 Address:
 Email:

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:

James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>

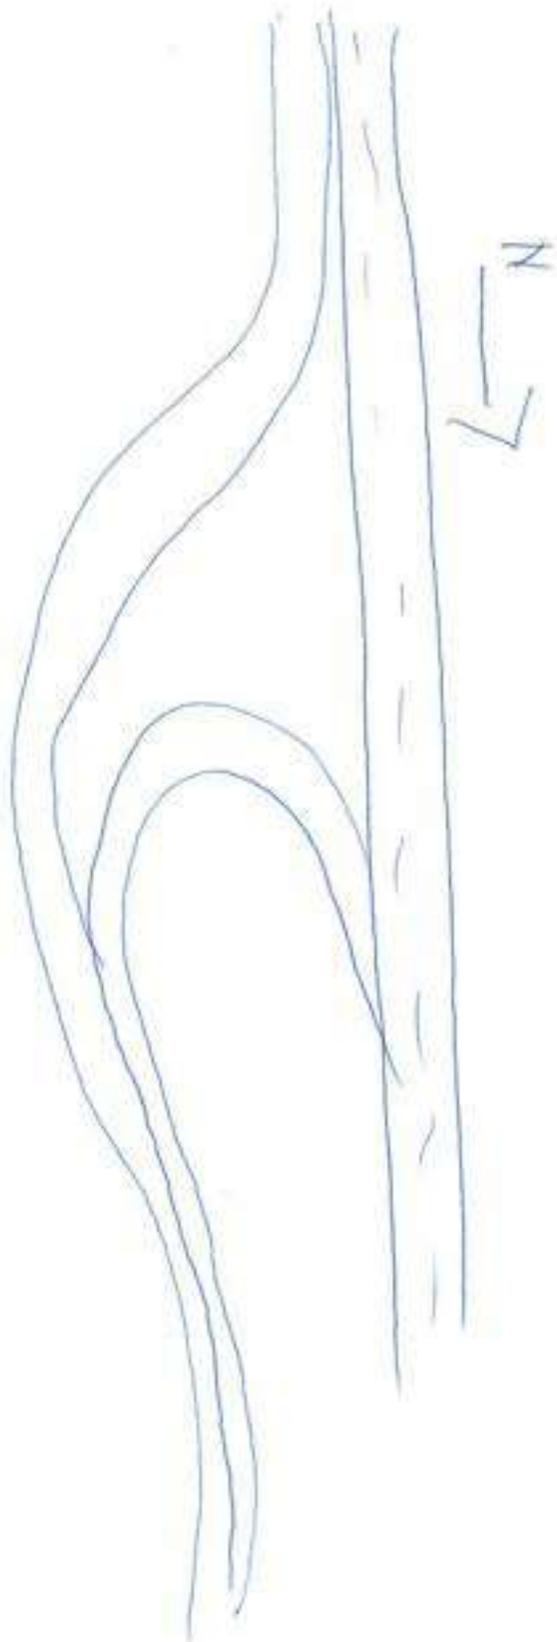



SR1 / Trap Shooters Road Interchange Study - Public Workshop 2
March 28, 2023
Comment Form

1. Do you support Alternative 1 – Extension of Trap Shooters Road with Wetland Fill?
 A. Yes
 B. No
 C. Unsure

2. Do you support Alternative 2 – Extension of Trap Shooters Road with Bridge Spanning Wetland?
 A. Yes
 B. No
 C. Unsure

3. Do you support Alternative 3 – New Spur Road from Barkers Landing Road to SR1 with Diamond Interchange?
 A. Yes
 B. No
 C. Unsure

4. Do you support Alternative 4 – New Spur Road from Barkers Landing Road to SR1 with Trumpet Interchange?
 A. Yes
 B. No
 C. Unsure

5. Is there another configuration for the corridor you prefer?
 If so, please describe: (please use the back of this form if you need additional space)

CLOSE THIS AND USE EXIT 88

Additional Comments: (please use the back of this form if you need additional space)

WE JUST BUILT A NEW INTERCHANGE
1/2 MILE SOUTH OF PROPOSED END OF

Please provide your contact information to stay informed about this project:
 Name: BRIAN HOWARD
 Address: 95 MAIN ST MAGNOLIA
 Email: BHUSIC302@GMAIL

THIS MESS!

Please turn-in your comment sheets at the workshop or mail/email prior to April 25, 2023 to:
James Galvin, AICP – Dover/Kent Co MPO Principal Planner
james.galvin@doverkentmpo.org - Ph: 302.387.6030
 1783 Friends Way, Ste 3, Camden, DE 19934
<http://www.doverkentmpo.org>

~~WHY ARE~~

WE JUST SPENT MILLIONS
FOR THE NEW INTERCHANGE (*88)
WHY SPEND ALL THIS TO DO
THE SAME THING?

P.S. ALL MAPS +
CHARTS ARE
NORTH UP



From: Melissa Anderson <mastiller1@yahoo.com>
Sent: Tuesday, March 21, 2023 1:16 PM
To: James Galvin <james.galvin@doverkentmpo.org>
Subject: Trap Shooters Rd exit

Hello,

I am not sure I will be able to attend the upcoming meeting, but I wanted to pass along my quick thoughts. Yes, I knew that southbound would have more accidents, but I do not think that you know why that it is. As someone who takes that exit and entrance daily, the exit lane is too short and the curve at the end is too sharp in slippery conditions. I see this plan partially rectifies the issue, but it doesn't seem to extend the exit lane/ramp, not to mention it increases the land you will be using to only partially fix this issue. Extending the exit lane would fix the issue without utilizing more land.

As for the northbound entrance, you could simply add a merge lane and fix the issue completely because the issue there is that cars entering Rt. 1 spin their tires when entering, causing a delayed entrance and accidents. Adding traction and a merge lane would fix that issue.

Any reason why these things can't be done without taking up more land? Seems like widening the bridge is all that it would take to fix both. I hope you personally drive this route going northbound Monday mornings between 7:30-8:30am and exit Southbound Thursdays between 4-5pm starting March and ending in December. Those are the worst times.

Also, the bowers beach exit, can we please talk about the timing of those lights? Why do we have to hit every single light every time going southbound.

Thanks,

A magnolia home owner

From: Roger Craig <rogc197@gmail.com>

Sent: Sunday, April 2, 2023 5:48:52 PM

To: dboyce@centuryeng.com <dboyce@centuryeng.com>

Cc: Sen. Eric Buckson <eric.buckson@delaware.gov>; Hon. Kerri Evelyn Harris <kerrievelyn.harris@delaware.gov>; Robert Scott <Robert.Scott@kentcountyde.gov>; Terry L. Pepper <terry.pepper@kentcountyde.gov>

Subject: Barkers Landing Rd./Trap Shooters Rd. Interchange

Hello Mr. Boyce,

Thank you for informing residents of Century Engineering's 4 proposals to improve the Barkers Landing Rd./Trap Shooters Rd. interchange on DE Rte 1. Northbound entry onto DEL-1 is certainly one of the most serious driving hazards in the area (it makes one long for "3 deuces and a 4-speed, and a 389"). The primary problems with the existing interchange, as I see it, is northbound entry and southbound exit.

The solutions presented on March 27th would, I believe, mitigate these problems but at great expense and inconvenience to the public. I'd like to suggest a much easier and possibly less expensive solution to the problem.

As the attached drawing suggests, I believe that forking off the southbound entrance (blue line), erecting an inclined ramp parallel to the southbound roadway long enough to clear the roadway, then bridging across and down onto the roadway would provide safe, efficient access to northbound DEL-1. Distances shown are not to scale as I don't know the proscribed specifications, but the ramp's length would be adjusted to meet grade and clearance requirements. The radius of the turn would be approximately what is found at, for instance, the northbound Rte 12 – Frederica interchange.

An issue exists, though, with exiting northbound traffic. I've considered several solutions and think that moving the deceleration ramp to the right of the descending northbound entrance ramp is the cleanest and safest.

A feature noted in the exhibits is to extend the southbound exit ramp further south to provide a longer deceleration ramp. I concur that the existing ramp is much too short especially since it is on a downhill grade. I normally pull onto the shoulder as soon as I clear the bridge to give me more room for slowing with less vigorous braking. Other than moving the proposed northbound ramp bridge further south, I don't think such an adjustment represents a problem.

I realize that the sketch is crude and I'm sure that the talented and creative engineers that developed the 4 alternative proposals presented last week will make it even more workable.

Note that I believe this solution would:

- save money,
- reduce construction time,
- reduce driving time,
- reduce disruption to travel patterns,
- reduce pollution,
- reduce incursion into preserved wetlands, and
- reduce property condemnations

Yet it will still achieve the improved safety goals of the project. Did I mention save taxpayers money?

Again, I appreciate your keeping the public informed regarding plans to improve this very hazardous interchange and look forward to hearing more as the plans develop.

Regards,

Roger A. Craig

“You can’t promote principled anti-corruption action without pissing off corrupt people.”
George Kent, Former Dep. Asst. Sec. of State



Workshop Pictures





Appendix E: Preferred Alternatives



ALTERNATIVE 3 AND 4
NEW SPUR ROAD WITH A
DIAMOND OR TRUMPET
INTERCHANGE AT SRI
ALT 4 - TRUMPET SHOWN

ALTERNATIVE 1 AND 2
RELOCATE RAMP FOR
TRAP SHOOTERS ROAD
TO THE SOUTH
ALT 2 WITH BRIDGE SHOWN

LEGEND	
	PROPOSED PAVEMENT
	PROPOSED RIGHT-OF-WAY DENIED ACCESS
	PROPOSED BARRIER
	POTENTIAL ADVANCED ACQUISITION
	EXISTING PAVEMENT REMOVED
	STORM WATER MANAGEMENT
	EXISTING WETLAND
	AGRICULTURAL PRESERVATION AREA
	IRRIGATION PATH
	PROPOSED SRI WIDENING BY OTHERS

Scale: 1" = 200'
March 28, 2023



LEGEND	
	PROPOSED PAVEMENT
	PROPOSED RIGHT-OF-WAY DEHED ACCESS
	PROPOSED BARRIER
	POTENTIAL ADVANCED ACQUISITION
	EXISTING PAVEMENT REMOVED
	STORM WATER MANAGEMENT
	EXISTING WETLAND
	AGRICULTURAL PRESERVATION AREA
	IRRIGATION PATH
	PROPOSED SRI WIDENING BY OTHERS

Scale: 1" = 60'

SHEET 1 OF 2

3/28/2023



LEGEND

-  PROPOSED PAVEMENT
-  PROPOSED RIGHT-OF-WAY DENIED ACCESS
-  PROPOSED BARRIER
-  POTENTIAL ADVANCED ACQUISITION
-  EXISTING PAVEMENT REMOVED
-  STORM WATER MANAGEMENT
-  EXISTING WETLAND
-  AGRICULTURAL PRESERVATION AREA
-  IRRIGATION PATH
-  PROPOSED SRI WIDENING BY OTHERS



Scale: 1" = 60'

SHEET 2 OF 2

3/28/2023



LEGEND

- PROPOSED PAVEMENT
- PROPOSED RIGHT-OF-WAY DEHED ACCESS
- PROPOSED BARRIER
- POTENTIAL ADVANCED ACQUISITION
- EXISTING PAVEMENT REMOVED
- STORM WATER MANAGEMENT
- EXISTING WETLAND
- AGRICULTURAL RESERVATION AREA
- IRRIGATION PATH
- PROPOSED SRI WIDENING BY OTHERS



Scale: 1" = 60'
SHEET 1 OF 2
3/28/2023




LEGEND	
	PROPOSED PAVEMENT
	PROPOSED RIGHT-OF-WAY DEHED ACCESS
	PROPOSED BARRIER
	POTENTIAL ADVANCED ACQUISITION
	EXISTING PAVEMENT REMOVED
	STORM WATER MANAGEMENT
	EXISTING WETLAND
	AGRICULTURAL PRESERVATION AREA
	IRRIGATION PATH
	PROPOSED SRI WIDENING BY OTHERS

Scale: 1" = 60'

SHEET 2 OF 2

3/28/2023

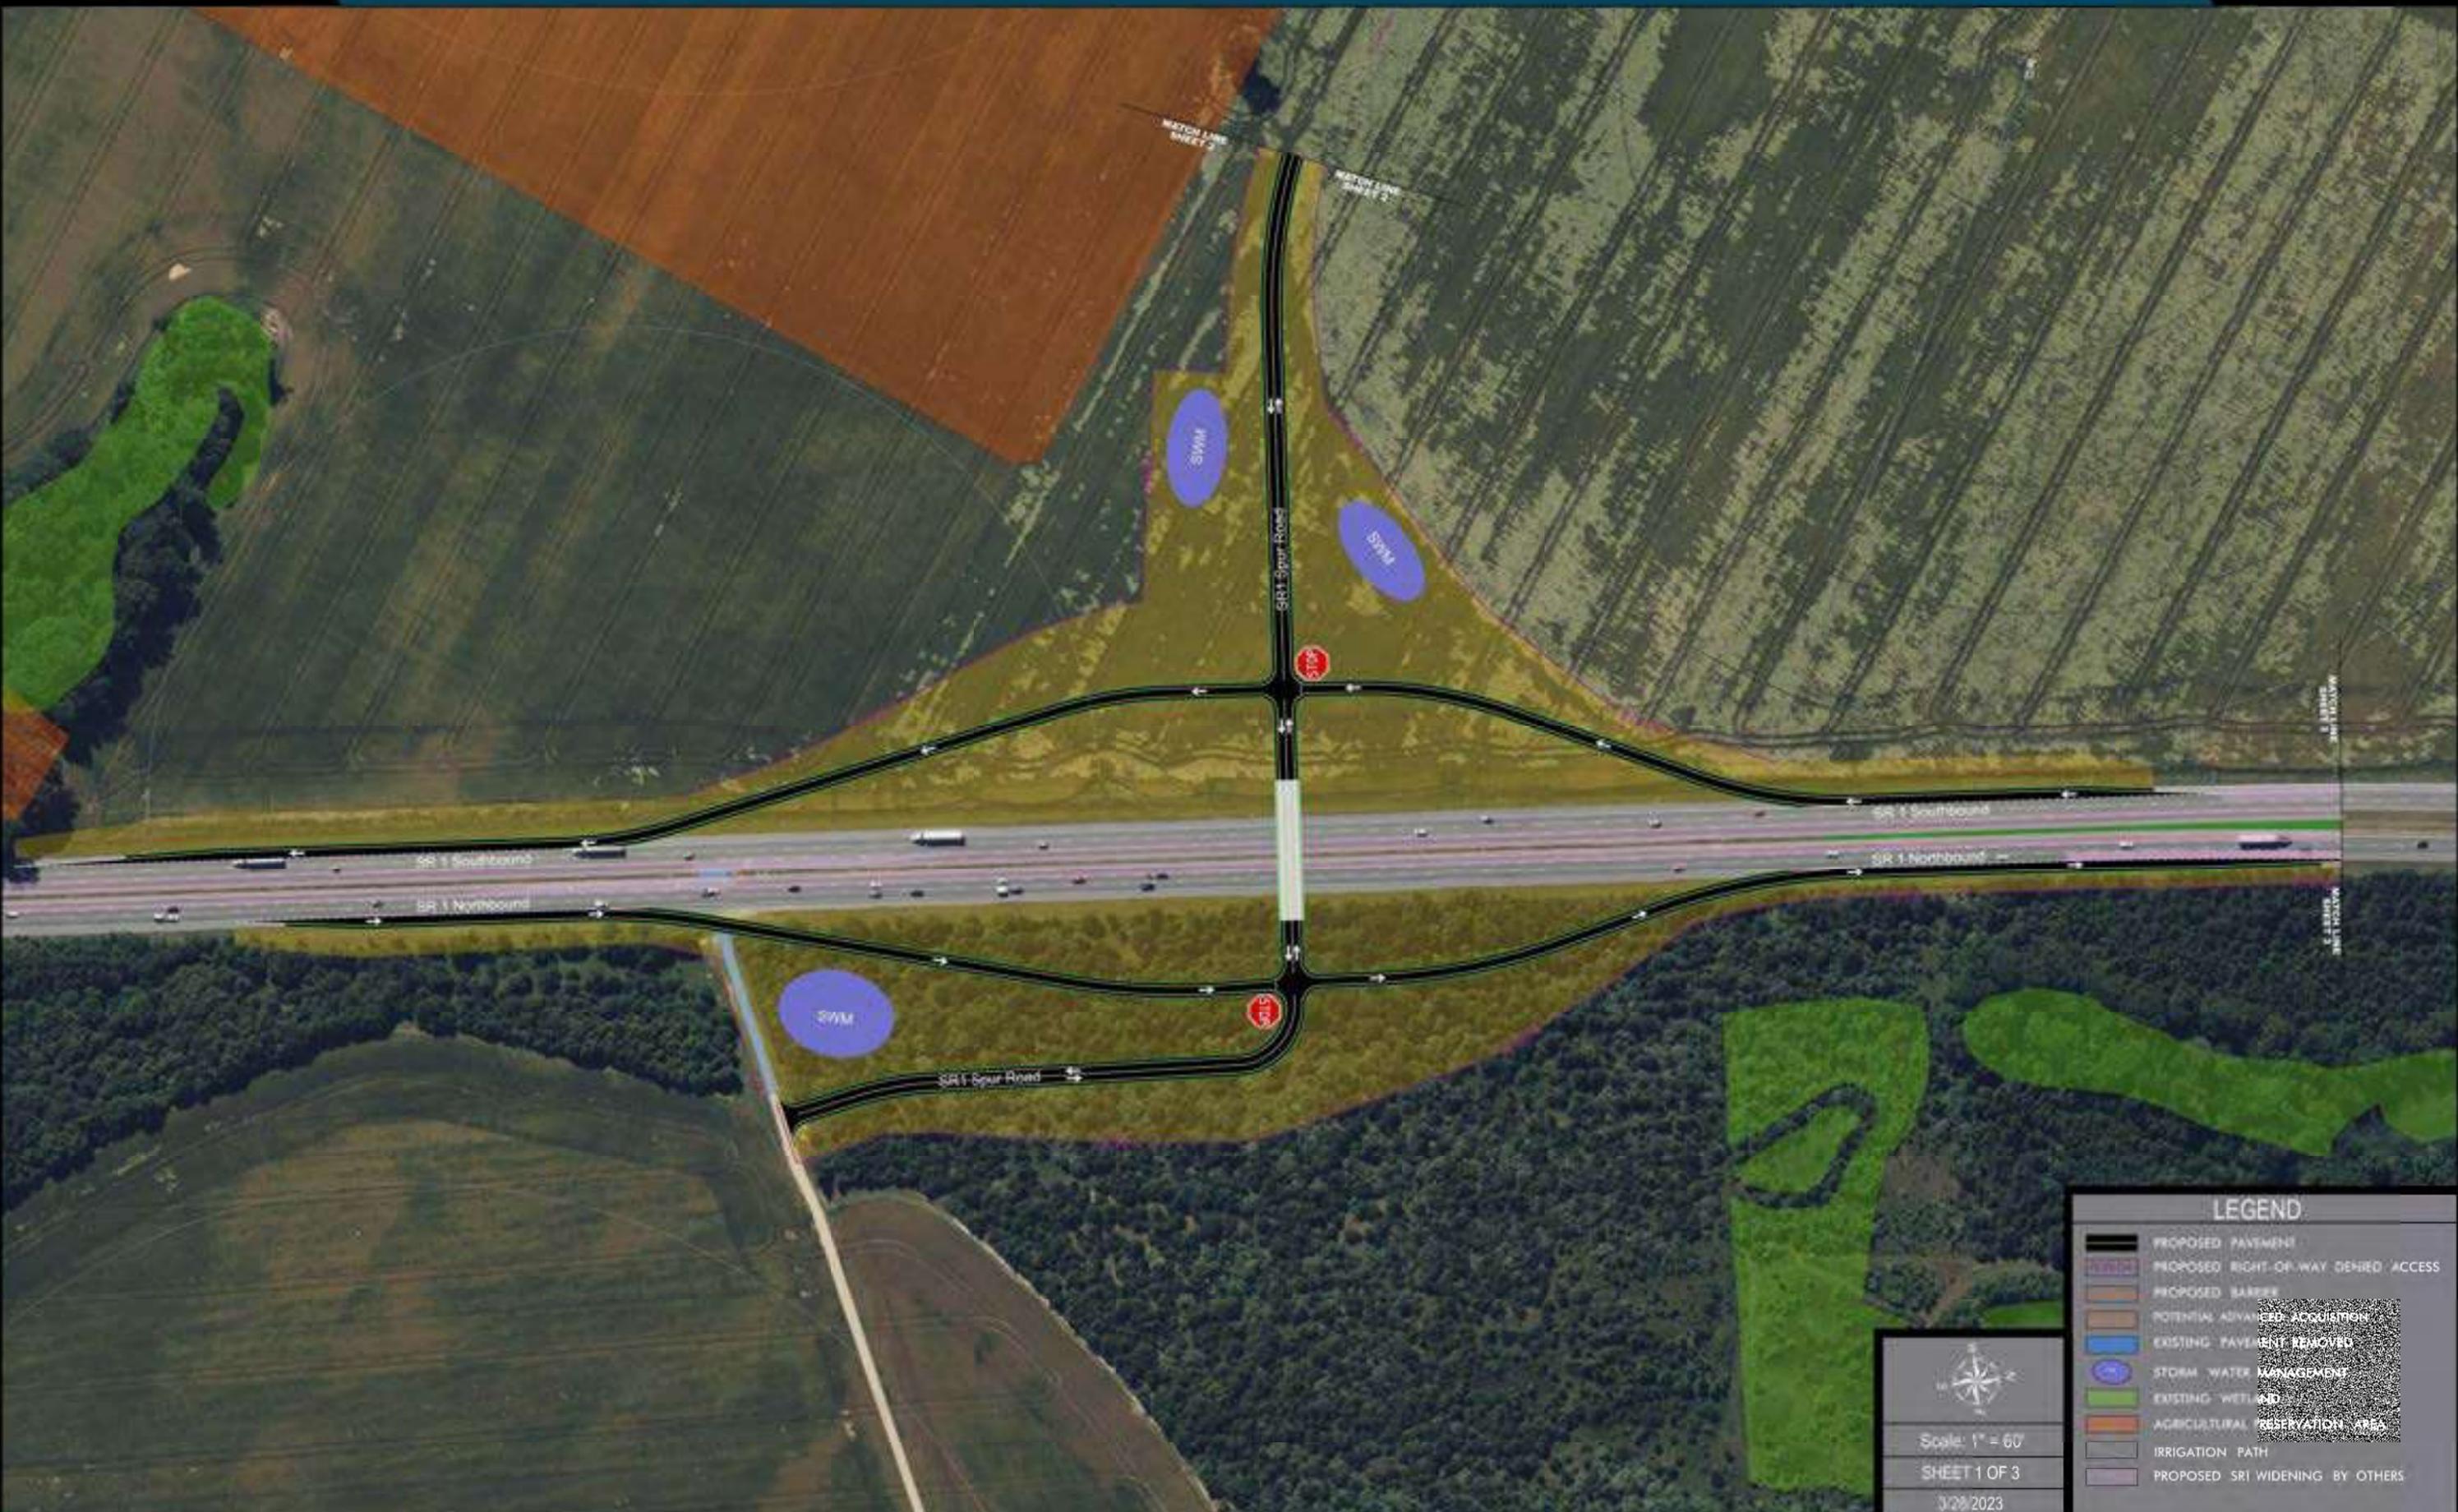


LEGEND

	PROPOSED PAVEMENT
	PROPOSED RIGHT-OF-WAY DEHED ACCESS
	PROPOSED BARRIER
	POTENTIAL ADVANCED ACQUISITION
	EXISTING PAVEMENT REMOVED
	STORM WATER MANAGEMENT
	EXISTING WETLAND
	AGRICULTURAL RESERVATION AREA
	IRRIGATION PATH
	PROPOSED SRI WIDENING BY OTHERS

Scale: 1" = 60'

SHEET 1 OF 3

3/28/2023

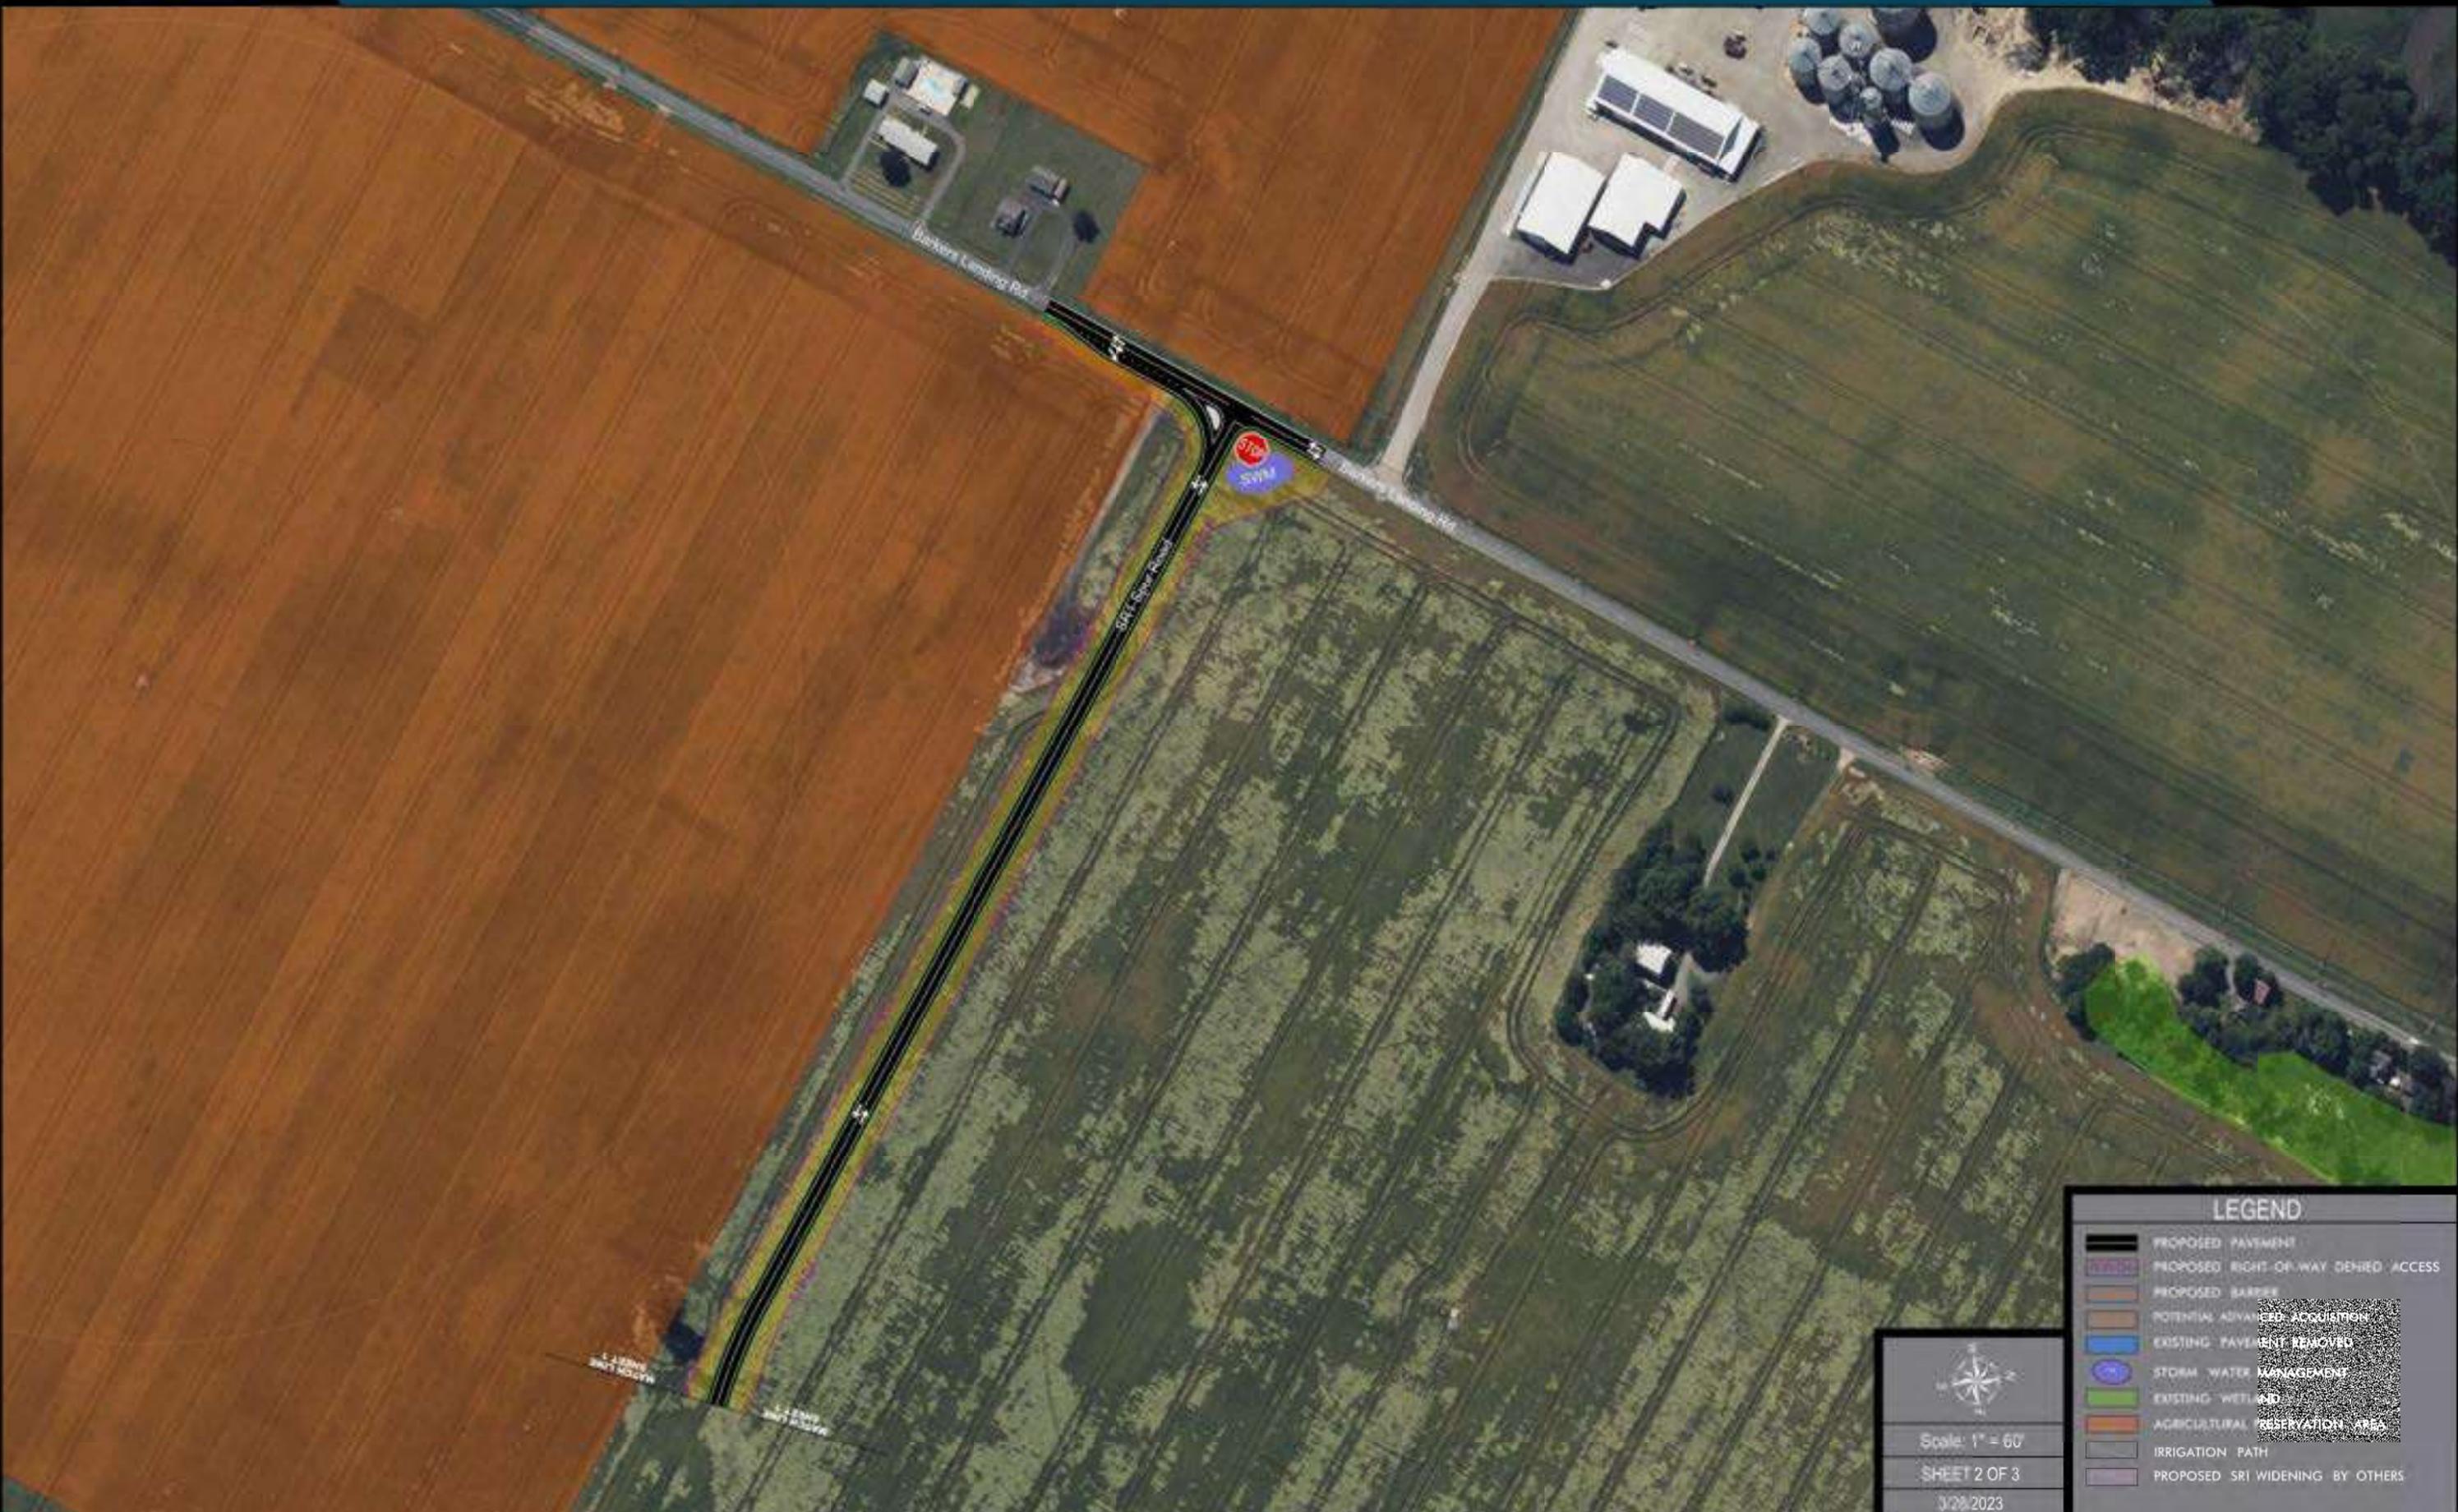


LEGEND

- PROPOSED PAVEMENT
- PROPOSED RIGHT-OF-WAY DEHED ACCESS
- PROPOSED BARRIER
- POTENTIAL ADVANCED ACQUISITION
- EXISTING PAVEMENT REMOVED
- STORM WATER MANAGEMENT
- EXISTING WETLAND
- AGRICULTURAL PRESERVATION AREA
- IRRIGATION PATH
- PROPOSED SRI WIDENING BY OTHERS

Scale: 1" = 60'

SHEET 2 OF 3

3/28/2023

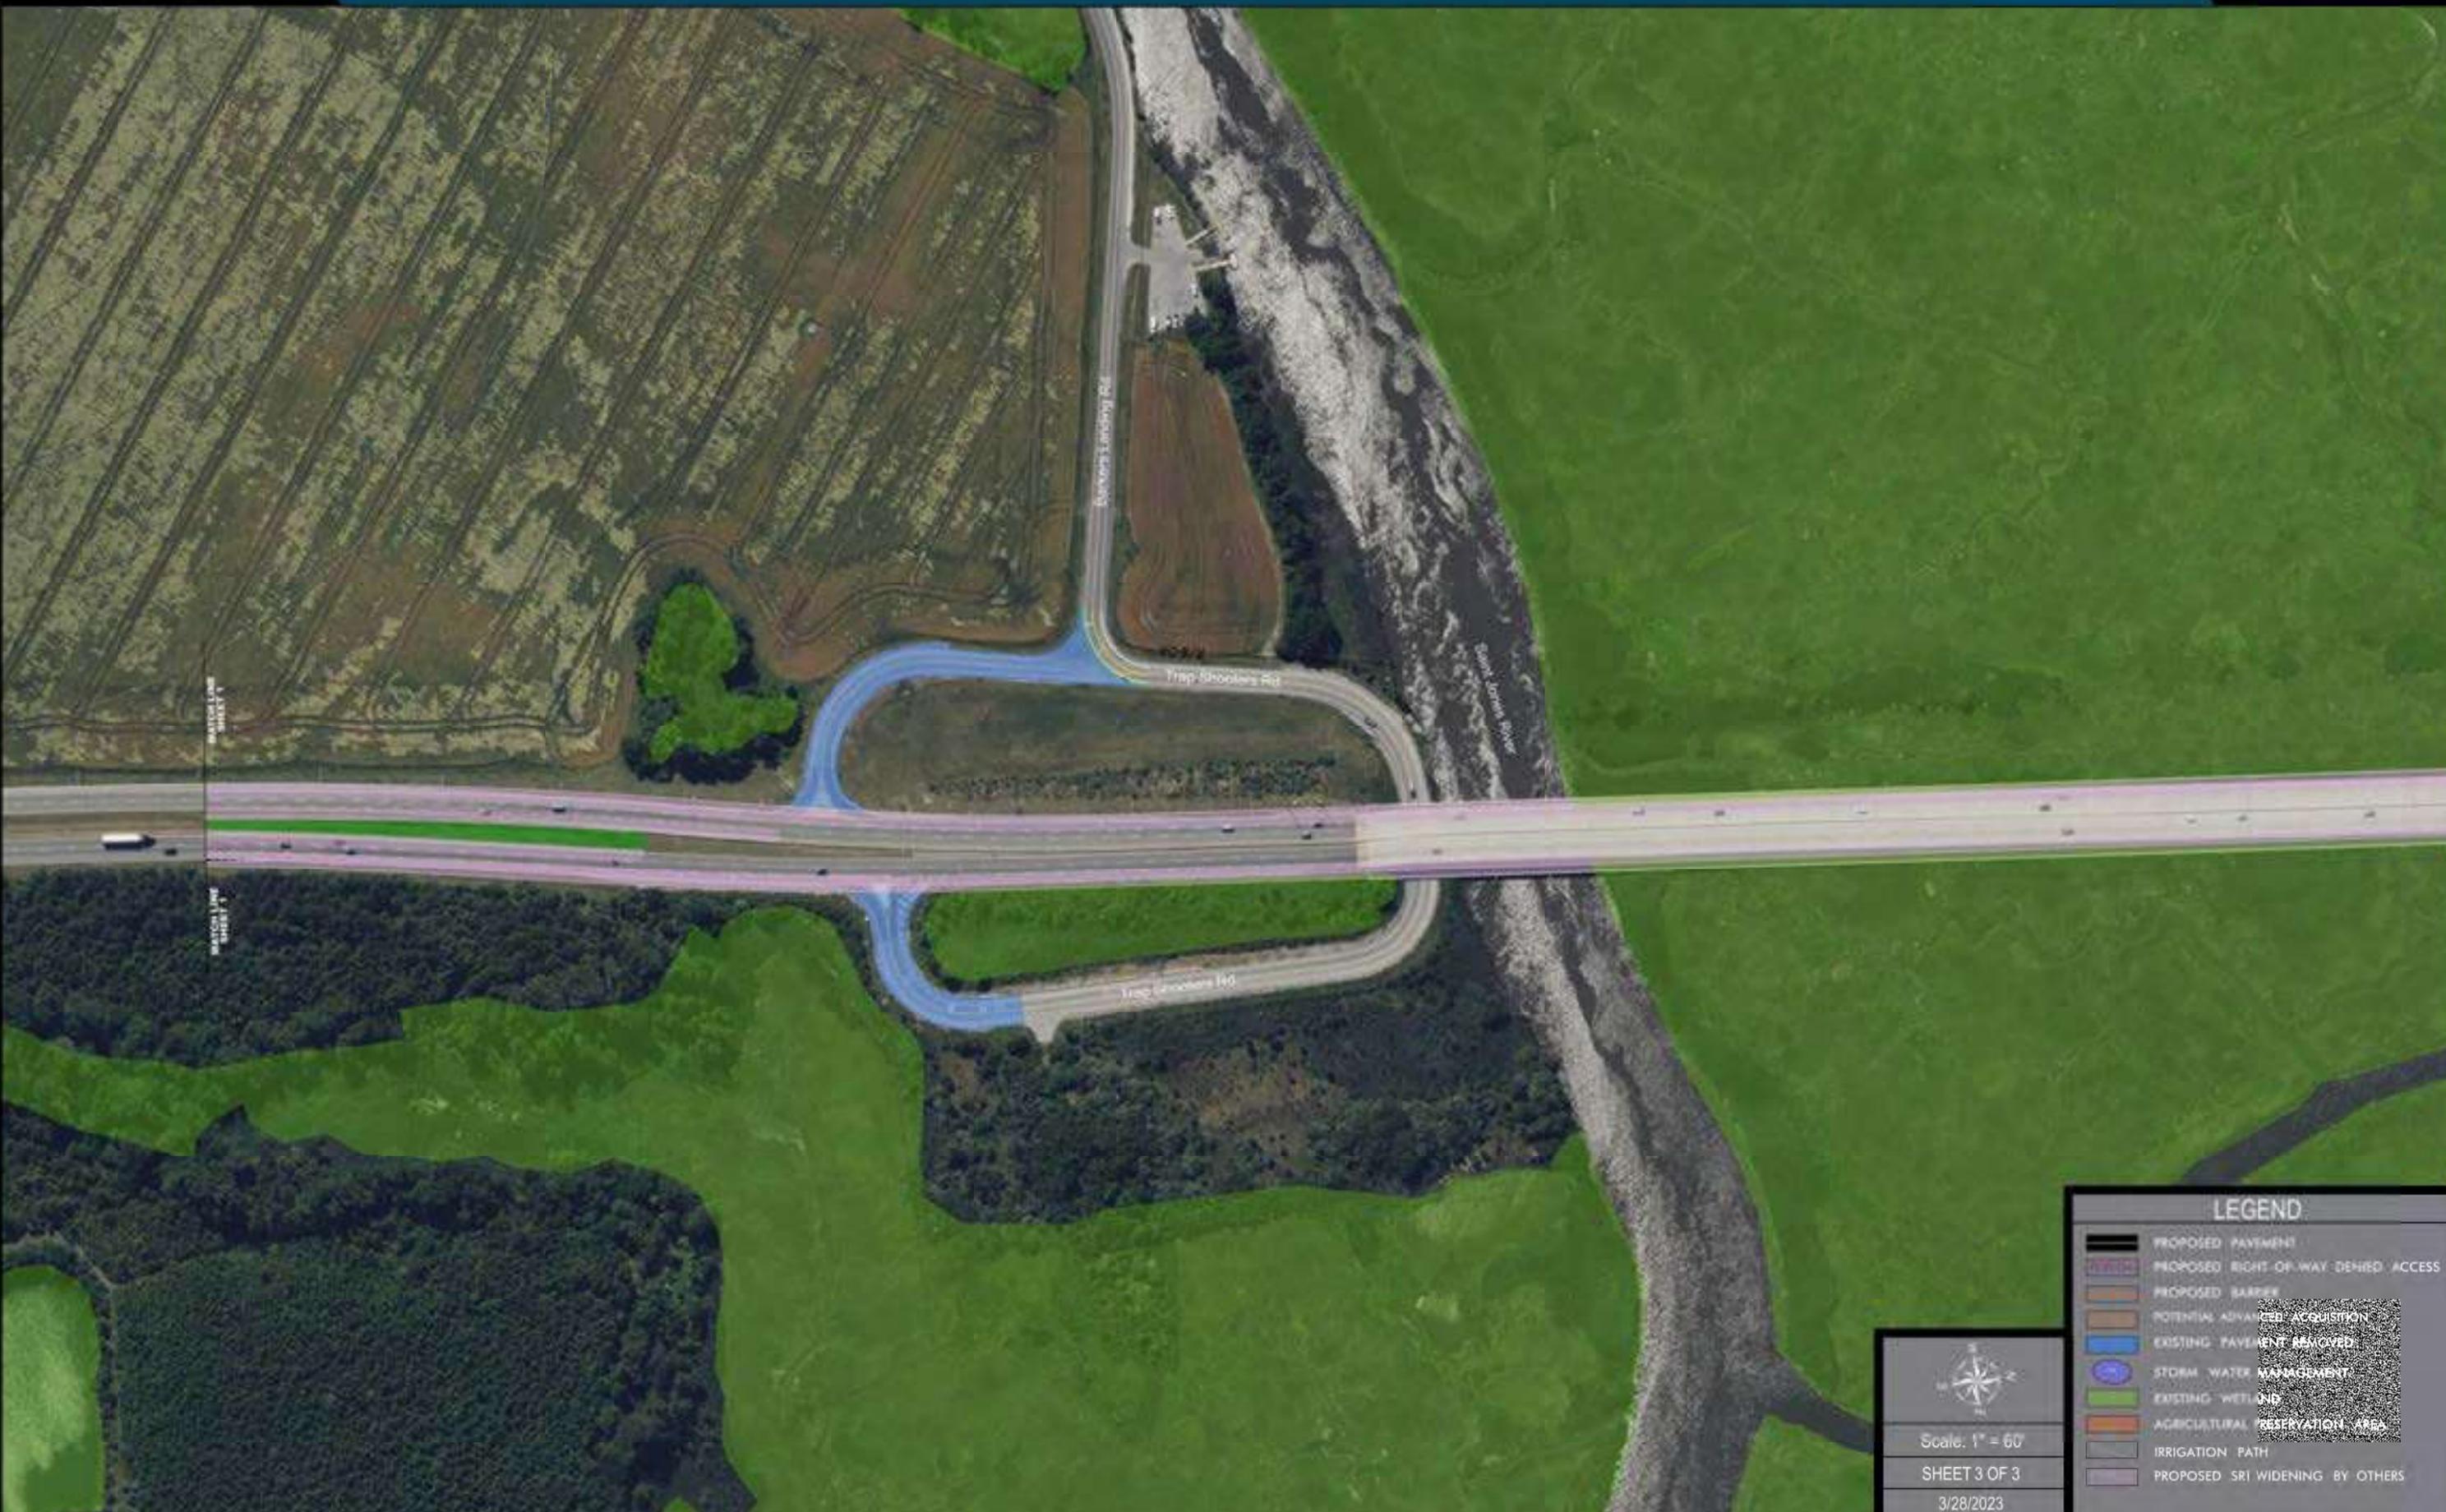

LEGEND

-  PROPOSED PAVEMENT
-  PROPOSED RIGHT-OF-WAY DEHIED ACCESS
-  PROPOSED BARRIER
-  POTENTIAL ADVANCED ACQUISITION
-  EXISTING PAVEMENT REMOVED
-  STORM WATER MANAGEMENT
-  EXISTING WETLAND
-  AGRICULTURAL PRESERVATION AREA
-  IRRIGATION PATH
-  PROPOSED SRI WIDENING BY OTHERS



Scale: 1" = 60'

SHEET 3 OF 3

3/28/2023



LEGEND

- PROPOSED PAVEMENT
- PROPOSED RIGHT-OF-WAY DEHIED ACCESS
- PROPOSED BARRIER
- POTENTIAL ADVANCED ACQUISITION
- EXISTING PAVEMENT REMOVED
- STORM WATER MANAGEMENT
- EXISTING WETLAND
- AGRICULTURAL PRESERVATION AREA
- IRRIGATION PATH
- PROPOSED SRI WIDENING BY OTHERS

Scale: 1" = 60'

SHEET 1 OF 3

3/28/2023




LEGEND

-  PROPOSED PAVEMENT
-  PROPOSED RIGHT-OF-WAY DENIED ACCESS
-  PROPOSED BARRIER
-  POTENTIAL ADVANCED ACQUISITION
-  EXISTING PAVEMENT REMOVED
-  STORM WATER MANAGEMENT
-  EXISTING WETLANDS
-  AGRICULTURAL PRESERVATION AREA
-  IRRIGATION PATH
-  PROPOSED SRI WIDENING BY OTHERS



Scale: 1" = 60'
SHEET 2 OF 3
3/28/2023

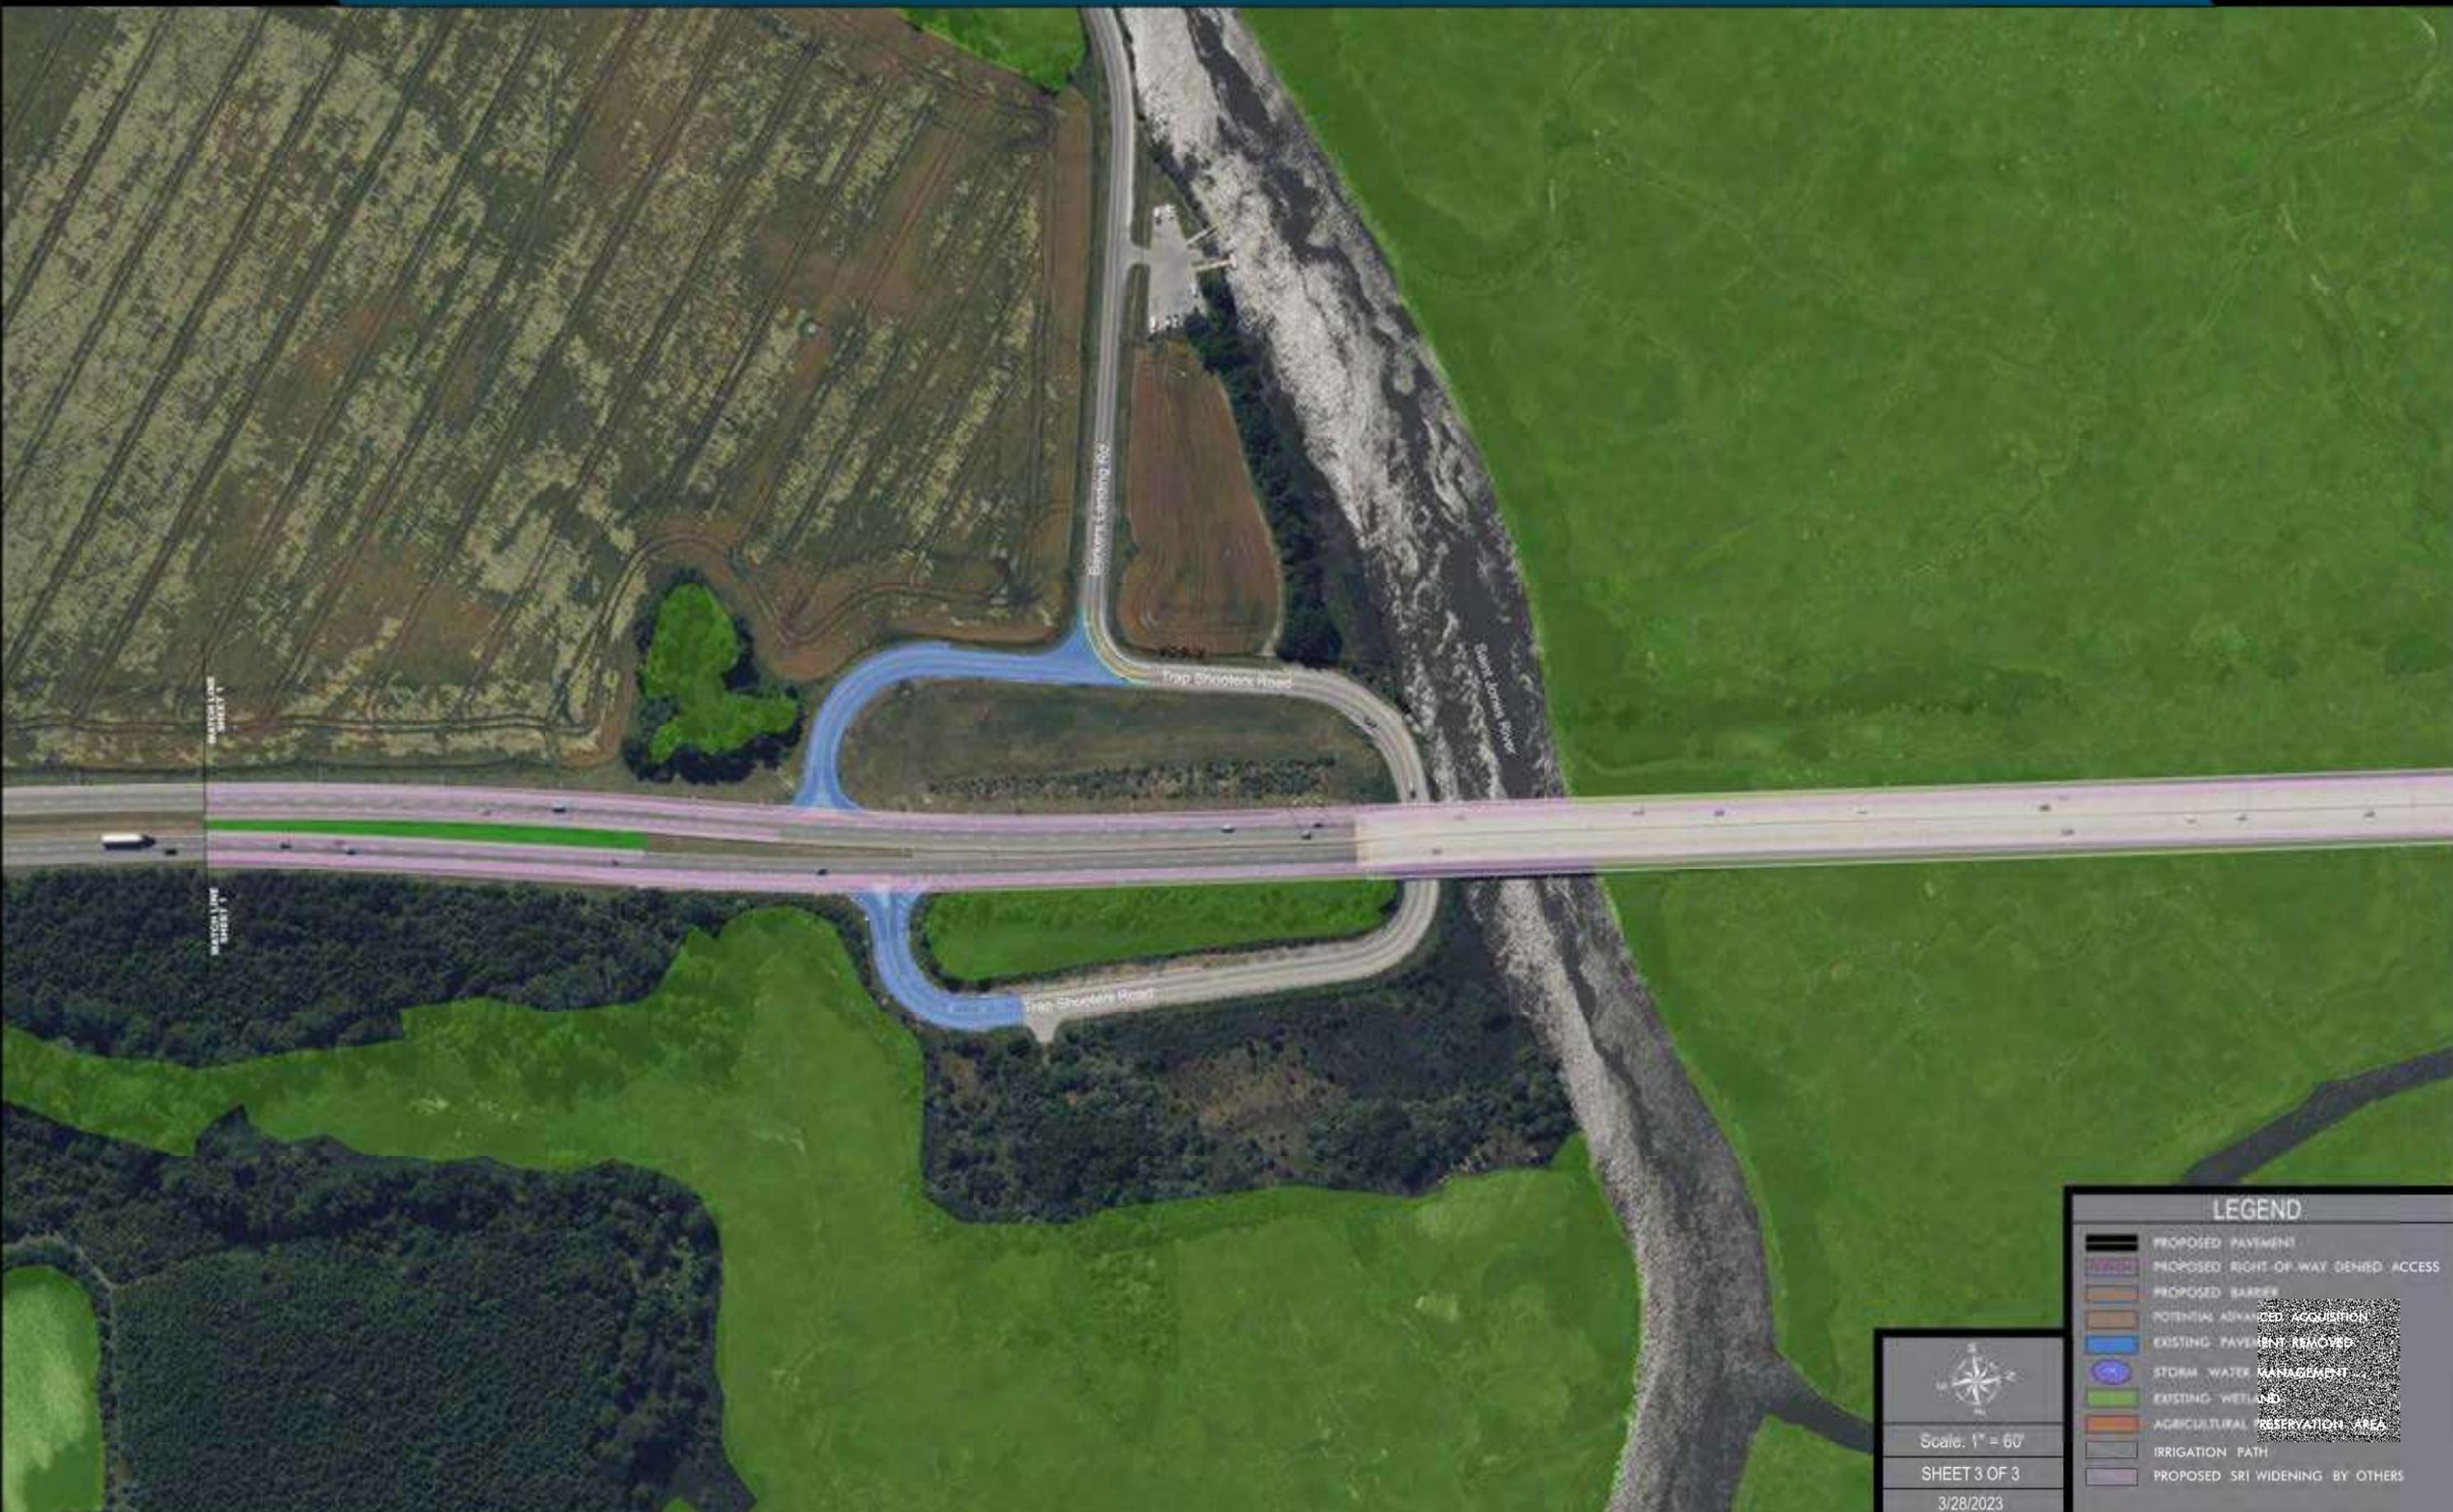

LEGEND

-  PROPOSED PAVEMENT
-  PROPOSED RIGHT-OF-WAY DENIED ACCESS
-  PROPOSED BARRIER
-  POTENTIAL ADVANCED ACQUISITION
-  EXISTING PAVEMENT REMOVED
-  STORM WATER MANAGEMENT
-  EXISTING WETLAND
-  AGRICULTURAL RESERVATION AREA
-  IRRIGATION PATH
-  PROPOSED SRI WIDENING BY OTHERS



Scale: 1" = 60'

SHEET 3 OF 3

3/28/2023

SR1 and Trap Shooters Road Interchange

Appendix F: Cost Estimates

Cost Estimate Summary

Trap Shooters Road and SR1 Interchnage improvements - Alternative 1

	Funded Amount (CTP):	Current Estimate	% Difference
Preliminary Engineering		\$2,248,360.00	
Right-of-Way		\$1,300,000.00	
Total Construction		\$13,877,220.10	

Contractor Items*	\$8,993,436.13		* From TrnsPort
Const. Contingency	\$2,248,359.03	@	25.00%
CE**	\$2,327,359.03	@	25.88%
Traffic	\$50,000.00		
Utilities	\$150,000.00		
Planting	\$20,000.00		
Env. Performance	\$0.00		
QA/QC for HMA	\$7,982.10		
Asphalt Cost Adj	\$80,083.80		

Total Need: \$13,877,220.10

** CE costs consist of the following:

Advertisement	\$1,000.00
Construction inspection services	\$1,349,015.42
Construction engineering services	\$899,343.61
E&S Inspection services	\$63,000.00
Pipe Video Inspection Services	\$0.00
Materials and Research Insp. Services	\$15,000.00
Misc. Construction Items	\$0.00

Primavera Estimate Data

Preliminary Engineering	\$2,248,360.00
Right-of-Way	\$1,300,000.00
Construction	\$13,877,220.10
Contingency	\$2,336,424.93
CE	\$2,327,359.03
Traffic	\$50,000.00
Utilities	\$150,000.00

Trap Shooters Road and SR1 Interchnage improvements - Alternative 1

TBD

Conceptual Cost Estimate 4/18/2023

ITEM #	TITLE	UNIT	ESTIMATE COST	UNIT QUANTITY	TOTAL	
201000	CLEARING AND GRUBBING	LS	\$150,000.00	1.00	\$150,000.00	
202000	EXCAVATION AND EMBANKMENT	CY	\$40.00	45740.00	\$1,829,600.00	
202003	UNDERCUT EXCAVATION	CY	\$35.00	2179.00	\$76,265.00	
204000	TEST HOLE	CY	\$200.00	11.00	\$2,200.00	
209001	BORROW, TYPE A	CY	\$30.00	11622.00	\$348,660.00	
209006	BORROW, TYPE F	CY	\$25.00	1271.00	\$31,775.00	
301001	GABC	CY	\$65.00	7818.00	\$508,170.00	
302002	DELAWARE NO. 3 STONE	TON	\$60.00	107.00	\$6,420.00	
401006	SUPERPAVE TYPE C, PG 70-22 (CARBONATE STONE)	TON	\$140.00	3778.00	\$528,920.00	
401015	SUPERPAVE TYPE B, PG 70-22	TON	\$125.00	7669.00	\$958,625.00	
401021	SUPERPAVE TYPE BCBC, PG 64-22	TON	\$100.00	11359.00	\$1,135,900.00	
601032	REINFORCED CONCRETE PIPE, 15", CLASS IV	LF	\$70.00	200.00	\$14,000.00	
601033	REINFORCED CONCRETE PIPE, 18", CLASS IV	LF	\$80.00	500.00	\$40,000.00	
601035	REINFORCED CONCRETE PIPE, 24", CLASS IV	LF	\$100.00	840.00	\$84,000.00	
601144	REINFORCED CONCRETE FLARED END SECTION, 24"	EACH	\$1,800.00	14.00	\$25,200.00	
602005	DRAINAGE INLET, 48" X 48"	EACH	\$4,500.00	8.00	\$36,000.00	
701023	J.PCC CURB AND GUTTER, TYPE 3-8	LF	\$36.00	1406.00	\$50,616.00	
705001	PCC SIDEWALK, 4"	SF	\$11.00	0.00	\$0.00	
705002	PCC SIDEWALK, 6"	SF	\$15.00	19737.00	\$296,055.00	
705007	DETECTABLE WARNING SURFACE	SF	\$50.00	0.00	\$0.00	
723015	CONCRETE MEDIAN BARRIER, 42? F-SHAPE	LF	\$200.00	1743.00	\$348,600.00	
762000	SAW CUTTING, BITUMINOUS CONCRETE	LF	\$2.50	0.00	\$0.00	
762001	SAW CUTTING, CONCRETE, FULL DEPTH	LF	\$5.00	5114.00	\$25,570.00	
817002	PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND, ALKYD-THERMOPLASTIC	SF	\$15.00	62.00	\$930.00	
817013	PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"	LF	\$0.80	27807.00	\$22,245.60	
905001	SILT FENCE	LF	\$1.50	6498.00	\$9,747.00	
905004	INLET SEDIMENT CONTROL, DRAINAGE INLET	EACH	\$150.00	8.00	\$1,200.00	
908004	TOPSOIL, 6" DEPTH	SY	\$15.00	27323.00	\$409,845.00	
908014	PERMANENT GRASS SEEDING, DRY GROUND	SY	\$1.00	27323.00	\$27,323.00	
908015	PERMANENT GRASS SEEDING, STORMWATER	SY	\$1.50	27323.00	\$40,984.50	
908017	TEMPORARY GRASS SEEDING	SY	\$0.75	86068.00	\$64,551.00	
908023	STABILIZED CONSTRUCTION ENTRANCE	SY	\$45.00	477.00	\$21,465.00	
908024	STABILIZED CONSTRUCTION ENTRANCE, TOPDRESSING	TON	\$78.00	40.00	\$3,120.00	
850003	LUMINAIRE (HPS), 150 WATTS	EACH	\$13,000.00	36.00	\$468,000.00	
999999	BRIDGE CONSTRUCTION	LS	\$0.00	0.00	\$0.00	
999999	STORMWATER MANAGEMENT POND LUMP SUM	LS	\$100,000.00	3.00	\$300,000.00	
999999	MAINTENANCE OF TRAFFIC	LS	\$500,000.00	1.00	\$500,000.00	
	Subtotal				\$8,365,987.10	
763000	Initial Expense (5%)	L.S.	\$418,299.36	1	\$418,299.36	
763501	Construction Engineering (2.5%)	L.S.	\$209,149.68	1	\$209,149.68	
	TOTAL BASE FOR PROJECT				\$8,993,436.13	
	CONSTRUCTION CONTINGENCY		25%	\$2,248,359.03	1	\$2,248,359.03
	TRAFFIC (FROM TRAFFIC STATEMENT)	L.S.	\$50,000.00	1	\$50,000.00	
	UTILITY	L.S.	\$150,000.00	1	\$150,000.00	
	PLANTING	L.S.	\$20,000.00	1	\$20,000.00	
	QA/QC for HMA	L.S.	\$7,982.10	1	\$7,982.10	
	Asphalt Cost Adj	L.S.	\$80,083.80	1	\$80,083.80	
	CONSTRUCTION ENGINEERING - (INSPECTION, CE, ETC)	L.S.	\$2,327,359.03	1	\$2,327,359.03	
	TOTAL CONSTRUCTION COST				\$13,877,220.10	
	PROJECT DEVELOPMENT	L.S.	\$899,340.00	1	\$899,340.00	
	PRELIMINARY ENGINEERING (DESIGN)	L.S.	\$1,349,020.00	1	\$1,349,020.00	
	ROW COSTS	SF	\$1,298,637.50	1	\$1,300,000.00	
	TOTAL BASE CONSTRUCTION COST				\$17,425,580.10	

Cost Estimate Summary

Trap Shooters Road and SR1 Interchnage improvements - Alternative 2

	Funded Amount (CTP):	Current Estimate	% Difference
Preliminary Engineering		\$3,348,610.00	
Right-of-Way		\$1,400,000.00	
Total Construction		\$20,487,951.43	

Contractor Items*	\$13,394,441.95		* From TrnsPort
Const. Contingency	\$3,348,610.49 @		25.00%
CE**	\$3,439,610.49 @		25.68%
Traffic	\$50,000.00		
Utilities	\$150,000.00		
Planting	\$20,000.00		
Env. Performance	\$0.00		
QA/QC for HMA	\$7,730.10		
Asphalt Cost Adj	\$77,558.40		

Total Need: \$20,487,951.43

** CE costs consist of the following:

Advertisement	\$1,000.00
Construction inspection services	\$2,009,166.29
Construction engineering services	\$1,339,444.20
E&S Inspection services	\$70,000.00
Pipe Video Inspection Services	\$0.00
Materials and Research Insp. Services	\$20,000.00
Misc. Construction Items	\$0.00

Primavera Estimate Data

Preliminary Engineering	\$3,348,610.00
Right-of-Way	\$1,400,000.00
Construction	\$20,487,951.43
Contingency	\$3,433,898.99
CE	\$3,439,610.49
Traffic	\$50,000.00
Utilities	\$150,000.00

Trap Shooters Road and SR1 Interchnage improvements - Alternative 2

TBD

Conceptual Cost Estimate 4/18/2023

ITEM #	TITLE	UNIT	ESTIMATE COST	UNIT QUANTITY	TOTAL
201000	CLEARING AND GRUBBING	LS	\$150,000.00	1.00	\$150,000.00
202000	EXCAVATION AND EMBANKMENT	CY	\$40.00	48438.00	\$1,937,520.00
202003	UNDERCUT EXCAVATION	CY	\$35.00	2307.00	\$80,745.00
204000	TEST HOLE	CY	\$200.00	11.00	\$2,200.00
209001	BORROW, TYPE A	CY	\$30.00	11255.00	\$337,650.00
209006	BORROW, TYPE F	CY	\$25.00	128.00	\$3,200.00
301001	GABC	CY	\$65.00	7585.00	\$493,025.00
302002	DELAWARE NO. 3 STONE	TON	\$60.00	107.00	\$6,420.00
401006	SUPERPAVE TYPE C, PG 70-22 (CARBONATE STONE)	TON	\$140.00	3659.00	\$512,260.00
401015	SUPERPAVE TYPE B, PG 70-22	TON	\$125.00	7427.00	\$928,375.00
401021	SUPERPAVE TYPE BCBC, PG 64-22	TON	\$100.00	11000.00	\$1,100,000.00
601032	REINFORCED CONCRETE PIPE, 15", CLASS IV	LF	\$70.00	200.00	\$14,000.00
601033	REINFORCED CONCRETE PIPE, 18", CLASS IV	LF	\$80.00	500.00	\$40,000.00
601035	REINFORCED CONCRETE PIPE, 24", CLASS IV	LF	\$100.00	840.00	\$84,000.00
601144	REINFORCED CONCRETE FLARED END SECTION, 24"	EACH	\$1,800.00	14.00	\$25,200.00
602005	DRAINAGE INLET, 48" X 48"	EACH	\$4,500.00	8.00	\$36,000.00
701023	J.PCC CURB AND GUTTER, TYPE 3-8	LF	\$36.00	1406.00	\$50,616.00
705001	PCC SIDEWALK, 4"	SF	\$11.00	0.00	\$0.00
705002	PCC SIDEWALK, 6"	SF	\$15.00	19737.00	\$296,055.00
705007	DETECTABLE WARNING SURFACE	SF	\$50.00	0.00	\$0.00
723015	CONCRETE MEDIAN BARRIER, 42? F-SHAPE	LF	\$200.00	1743.00	\$348,600.00
762000	SAW CUTTING, BITUMINOUS CONCRETE	LF	\$2.50	0.00	\$0.00
762001	SAW CUTTING, CONCRETE, FULL DEPTH	LF	\$5.00	5114.00	\$25,570.00
817002	PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND, ALKYD-THERMOPLASTIC	SF	\$15.00	62.00	\$930.00
817013	PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"	LF	\$0.80	27705.00	\$22,164.00
905001	SILT FENCE	LF	\$1.50	6463.00	\$9,694.50
905004	INLET SEDIMENT CONTROL, DRAINAGE INLET	EACH	\$150.00	8.00	\$1,200.00
908004	TOPSOIL, 6" DEPTH	SY	\$15.00	32401.00	\$486,015.00
908014	PERMANENT GRASS SEEDING, DRY GROUND	SY	\$1.00	32401.00	\$32,401.00
908015	PERMANENT GRASS SEEDING, STORMWATER	SY	\$1.50	5315.00	\$7,972.50
908017	TEMPORARY GRASS SEEDING	SY	\$0.75	102064.00	\$76,548.00
908023	STABILIZED CONSTRUCTION ENTRANCE	SY	\$45.00	477.00	\$21,465.00
908024	STABILIZED CONSTRUCTION ENTRANCE, TOPDRESSING	TON	\$78.00	40.00	\$3,120.00
850003	LUMINAIRE (HPS), 150 WATTS	EACH	\$13,000.00	44.00	\$572,000.00
999999	LANDSCAPING LUMP SUM	LS	\$75,000.00	1.00	\$75,000.00
999999	BRIDGE CONSTRUCTION	SF	\$375.00	10880.00	\$4,080,000.00
999999	STORMWATER MANAGEMENT POND LUMP SUM	LS	\$100,000.00	3.00	\$300,000.00
999999	MAINTENANCE OF TRAFFIC	L.S.	\$300,000.00	1	\$300,000.00
	Subtotal				\$12,459,946.00
763000	Initial Expense (5%)	L.S.	\$622,997.30	1	\$622,997.30
763501	Construction Engineering (2.5%)	L.S.	\$311,498.65	1	\$311,498.65
	TOTAL BASE FOR PROJECT				\$13,394,441.95
	CONSTRUCTION CONTINGENCY	25%	\$3,348,610.49	1	\$3,348,610.49
	TRAFFIC (FROM TRAFFIC STATEMENT)	L.S.	\$50,000.00	1	\$50,000.00
	UTILITY	L.S.	\$150,000.00	1	\$150,000.00
	PLANTING	L.S.	\$20,000.00	1	\$20,000.00
	QA/QC for HMA	L.S.	\$7,730.10	1	\$7,730.10
	Asphalt Cost Adj	L.S.	\$77,558.40	1	\$77,558.40
	CONSTRUCTION ENGINEERING - (INSPECTION, CE, ETC)	L.S.	\$3,439,610.49	1	\$3,439,610.49
	TOTAL CONSTRUCTION COST				\$20,487,951.43
	PROJECT DEVELOPMENT	L.S.	\$1,339,440.00	1	\$1,339,440.00
	PRELIMINARY ENGINEERING (DESIGN)	L.S.	\$2,009,170.00	1	\$2,009,170.00
	ROW COSTS	SF	\$1,384,927.50	1	\$1,400,000.00
	TOTAL BASE CONSTRUCTION COST				\$25,236,561.43

Cost Estimate Summary

Trap Shooters Road and SR1 Interchnage improvements - Alternative 3

	Funded Amount (CTP):	Current Estimate	% Difference
Preliminary Engineering		\$4,541,790.00	
Right-of-Way		\$2,300,000.00	
Total Construction		\$27,697,481.48	

Contractor Items*	\$18,167,157.45		* From TrnsPort
Const. Contingency	\$4,541,789.36	@	25.00%
CE**	\$4,690,539.36	@	25.82%
Traffic	\$50,000.00		
Utilities	\$150,000.00		
Planting	\$20,000.00		
Env. Performance	\$0.00		
QA/QC for HMA	\$7,069.30		
Asphalt Cost Adj	\$70,926.00		

Total Need: \$27,697,481.48

** CE costs consist of the following:

Advertisement	\$1,000.00
Construction inspection services	\$2,725,073.62
Construction engineering services	\$1,816,715.75
E&S Inspection services	\$127,750.00
Pipe Video Inspection Services	\$0.00
Materials and Research Insp. Services	\$20,000.00
Misc. Construction Items	\$0.00

Primavera Estimate Data

Preliminary Engineering	\$4,541,790.00
Right-of-Way	\$2,300,000.00
Construction	\$27,697,481.48
Contingency	\$4,619,784.66
CE	\$4,690,539.36
Traffic	\$50,000.00
Utilities	\$150,000.00

Trap Shooters Road and SR1 Interchnage improvements - Alternative 3

TBD

Conceptual Cost Estimate 4/18/2023

ITEM #	TITLE	UNIT	ESTIMATE COST	UNIT QUANTITY	TOTAL
201000	CLEARING AND GRUBBING	LS	\$75,000.00	1.00	\$75,000.00
202000	EXCAVATION AND EMBANKMENT	CY	\$40.00	76562.00	\$3,062,480.00
202003	UNDERCUT EXCAVATION	CY	\$35.00	3646.00	\$127,610.00
204000	TEST HOLE	CY	\$200.00	11.00	\$2,200.00
209001	BORROW, TYPE A	CY	\$30.00	10293.00	\$308,790.00
209006	BORROW, TYPE F	CY	\$20.00	260325.00	\$5,206,500.00
301001	GABC	CY	\$65.00	6554.00	\$426,010.00
302002	DELAWARE NO. 3 STONE	TON	\$60.00	107.00	\$6,420.00
401006	SUPERPAVE TYPE C, PG 70-22 (CARBONATE STONE)	TON	\$140.00	3346.00	\$468,440.00
401015	SUPERPAVE TYPE B, PG 70-22	TON	\$125.00	6792.00	\$849,000.00
401021	SUPERPAVE TYPE BCBC, PG 64-22	TON	\$100.00	10060.00	\$1,006,000.00
601032	REINFORCED CONCRETE PIPE, 15", CLASS IV	LF	\$70.00	300.00	\$21,000.00
601033	REINFORCED CONCRETE PIPE, 18", CLASS IV	LF	\$80.00	300.00	\$24,000.00
601035	REINFORCED CONCRETE PIPE, 24", CLASS IV	LF	\$100.00	960.00	\$96,000.00
601144	REINFORCED CONCRETE FLARED END SECTION, 24"	EACH	\$1,800.00	20.00	\$36,000.00
602005	DRAINAGE INLET, 48" X 48"	EACH	\$4,500.00	10.00	\$45,000.00
701023	J.PCC CURB AND GUTTER, TYPE 3-8	LF	\$36.00	89.00	\$3,204.00
705001	PCC SIDEWALK, 4"	SF	\$11.00	0.00	\$0.00
705002	PCC SIDEWALK, 6"	SF	\$15.00	341.00	\$5,115.00
705007	DETECTABLE WARNING SURFACE	SF	\$50.00	0.00	\$0.00
723015	CONCRETE MEDIAN BARRIER, 42? F-SHAPE	LF	\$200.00	0.00	\$0.00
762000	SAW CUTTING, BITUMINOUS CONCRETE	LF	\$2.50	0.00	\$0.00
762001	SAW CUTTING, CONCRETE, FULL DEPTH	LF	\$5.00	3936.00	\$19,680.00
817002	PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND, ALKYD-THERMOPLASTIC	SF	\$15.00	62.00	\$930.00
817013	PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"	LF	\$0.80	26027.00	\$20,821.60
905001	SILT FENCE	LF	\$1.50	9328.00	\$13,992.00
905004	INLET SEDIMENT CONTROL, DRAINAGE INLET	EACH	\$150.00	10.00	\$1,500.00
908004	TOPSOIL, 6" DEPTH	SY	\$15.00	77776.00	\$1,166,640.00
908014	PERMANENT GRASS SEEDING, DRY GROUND	SY	\$1.00	77776.00	\$77,776.00
908015	PERMANENT GRASS SEEDING, STORMWATER	SY	\$1.50	5061.00	\$7,591.50
908017	TEMPORARY GRASS SEEDING	SY	\$0.75	244995.00	\$183,746.25
908023	STABILIZED CONSTRUCTION ENTRANCE	SY	\$45.00	477.00	\$21,465.00
908024	STABILIZED CONSTRUCTION ENTRANCE, TOPDRESSING	TON	\$78.00	40.00	\$3,120.00
850003	LUMINAIRE (HPS), 150 WATTS	EACH	\$13,000.00	53.00	\$689,000.00
999999	LANDSCAPING LUMP SUM	LS	\$75,000.00	1.00	\$75,000.00
999999	BRIDGE CONSTRUCTION	SF	\$325.00	6922.00	\$2,249,650.00
999999	STORMWATER MANAGEMENT POND LUMP SUM	LS	\$350,000.00	1.00	\$350,000.00
999999	MAINTENANCE OF TRAFFIC	L.S.	\$250,000.00	1	\$250,000.00
	Subtotal				\$16,899,681.35
763000	Initial Expense (5%)	L.S.	\$844,984.07	1	\$844,984.07
763501	Construction Engineering (2.5%)	L.S.	\$422,492.03	1	\$422,492.03
	TOTAL BASE FOR PROJECT				\$18,167,157.45
	CONSTRUCTION CONTINGENCY	25%	\$4,541,789.36	1	\$4,541,789.36
	TRAFFIC (FROM TRAFFIC STATEMENT)	L.S.	\$50,000.00	1	\$50,000.00
	UTILITY	L.S.	\$150,000.00	1	\$150,000.00
	PLANTING	L.S.	\$20,000.00	1	\$20,000.00
	QA/QC for HMA	L.S.	\$7,069.30	1	\$7,069.30
	Asphalt Cost Adj	L.S.	\$70,926.00	1	\$70,926.00
	CONSTRUCTION ENGINEERING - (INSPECTION, CE, ETC)	L.S.	\$4,690,539.36	1	\$4,690,539.36
	TOTAL CONSTRUCTION COST				\$27,697,481.48
	PROJECT DEVELOPMENT	L.S.	\$1,816,720.00	1	\$1,816,720.00
	PRELIMINARY ENGINEERING (DESIGN)	L.S.	\$2,725,070.00	1	\$2,725,070.00
	ROW COSTS	SF	\$2,298,230.00	1	\$2,300,000.00
	TOTAL BASE CONSTRUCTION COST				\$34,539,271.48

Cost Estimate Summary

Contract No.

TBD

Trap Shooters Road and SR1 Interchnage improvements - Alternative 4

	Funded Amount (CTP):	Current Estimate	% Difference
Preliminary Engineering		\$4,107,700.00	
Right-of-Way		\$2,500,000.00	
Total Construction		\$25,097,374.25	

Contractor Items*	\$16,430,787.84		* From TrnsPort
Const. Contingency	\$4,107,696.96	@	25.00%
CE**	\$4,256,446.96	@	25.91%
Traffic	\$50,000.00		
Utilities	\$150,000.00		
Planting	\$20,000.00		
Env. Performance	\$0.00		
QA/QC for HMA	\$7,472.50		
Asphalt Cost Adj	\$74,970.00		

Total Need: \$25,097,374.25

** CE costs consist of the following:

Advertisement	\$1,000.00
Construction inspection services	\$2,464,618.18
Construction engineering services	\$1,643,078.78
E&S Inspection services	\$127,750.00
Pipe Video Inspection Services	\$0.00
Materials and Research Insp. Services	\$20,000.00
Misc. Construction Items	\$0.00

Primavera Estimate Data

Preliminary Engineering	\$4,107,700.00
Right-of-Way	\$2,500,000.00
Construction	\$25,097,374.25
Contingency	\$4,190,139.46
CE	\$4,256,446.96
Traffic	\$50,000.00
Utilities	\$150,000.00

Trap Shooters Road and SR1 Interchnage improvements - Alternative 4

TBD

Conceptual Cost Estimate 4/18/2023

ITEM #	TITLE	UNIT	ESTIMATE COST	UNIT QUANTITY	TOTAL
201000	CLEARING AND GRUBBING	LS	\$75,000.00	1.00	\$75,000.00
202000	EXCAVATION AND EMBANKMENT	CY	\$40.00	80211.00	\$3,208,440.00
202003	UNDERCUT EXCAVATION	CY	\$35.00	76391.00	\$2,673,685.00
204000	TEST HOLE	CY	\$200.00	11.00	\$2,200.00
209001	BORROW, TYPE A	CY	\$30.00	10881.00	\$326,430.00
209006	BORROW, TYPE F	CY	\$20.00	27601.00	\$552,020.00
301001	GABC	CY	\$65.00	6934.00	\$450,710.00
302002	DELAWARE NO. 3 STONE	TON	\$60.00	107.00	\$6,420.00
401006	SUPERPAVE TYPE C, PG 70-22 (CARBONATE STONE)	TON	\$140.00	3537.00	\$495,180.00
401015	SUPERPAVE TYPE B, PG 70-22	TON	\$125.00	7179.00	\$897,375.00
401021	SUPERPAVE TYPE BCBC, PG 64-22	TON	\$100.00	10634.00	\$1,063,400.00
601032	REINFORCED CONCRETE PIPE, 15", CLASS IV	LF	\$70.00	300.00	\$21,000.00
601033	REINFORCED CONCRETE PIPE, 18", CLASS IV	LF	\$80.00	300.00	\$24,000.00
601035	REINFORCED CONCRETE PIPE, 24", CLASS IV	LF	\$100.00	960.00	\$96,000.00
601144	REINFORCED CONCRETE FLARED END SECTION, 24"	EACH	\$1,800.00	20.00	\$36,000.00
602005	DRAINAGE INLET, 48" X 48"	EACH	\$4,500.00	10.00	\$45,000.00
701023	J.PCC CURB AND GUTTER, TYPE 3-8	LF	\$36.00	89.00	\$3,204.00
705001	PCC SIDEWALK, 4"	SF	\$11.00	0.00	\$0.00
705002	PCC SIDEWALK, 6"	SF	\$15.00	341.00	\$5,115.00
705007	DETECTABLE WARNING SURFACE	SF	\$50.00	0.00	\$0.00
723015	CONCRETE MEDIAN BARRIER, 42? F-SHAPE	LF	\$200.00	0.00	\$0.00
762000	SAW CUTTING, BITUMINOUS CONCRETE	LF	\$2.50	0.00	\$0.00
762001	SAW CUTTING, CONCRETE, FULL DEPTH	LF	\$5.00	4486.00	\$22,430.00
817002	PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND, ALKYD-THERMOPLASTIC	SF	\$15.00	62.00	\$930.00
817013	PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"	LF	\$0.80	27361.00	\$21,888.80
905001	SILT FENCE	LF	\$1.50	9789.00	\$14,683.50
905004	INLET SEDIMENT CONTROL, DRAINAGE INLET	EACH	\$150.00	10.00	\$1,500.00
908004	TOPSOIL, 6" DEPTH	SY	\$15.00	81984.00	\$1,229,760.00
908014	PERMANENT GRASS SEEDING, DRY GROUND	SY	\$1.00	81984.00	\$81,984.00
908015	PERMANENT GRASS SEEDING, STORMWATER	SY	\$1.50	4784.00	\$7,176.00
908017	TEMPORARY GRASS SEEDING	SY	\$0.75	258250.00	\$193,687.50
908023	STABILIZED CONSTRUCTION ENTRANCE	SY	\$45.00	477.00	\$21,465.00
908024	STABILIZED CONSTRUCTION ENTRANCE, TOPDRESSING	TON	\$78.00	40.00	\$3,120.00
850003	LUMINAIRE (HPS), 150 WATTS	EACH	\$13,000.00	60.00	\$780,000.00
999999	LANDSCAPING LUMP SUM	LS	\$75,000.00	1.00	\$75,000.00
999999	BRIDGE CONSTRUCTION	SF	\$325.00	6922.00	\$2,249,650.00
999999	STORMWATER MANAGEMENT POND LUMP SUM	LS	\$350,000.00	1.00	\$350,000.00
999999	MAINTENANCE OF TRAFFIC	L.S.	\$250,000.00	1	\$250,000.00
	Subtotal				\$15,284,453.80
763000	Initial Expense (5%)	L.S.	\$764,222.69	1	\$764,222.69
763501	Construction Engineering (2.5%)	L.S.	\$382,111.35	1	\$382,111.35
	TOTAL BASE FOR PROJECT				\$16,430,787.84
	CONSTRUCTION CONTINGENCY	25%	\$4,107,696.96	1	\$4,107,696.96
	TRAFFIC (FROM TRAFFIC STATEMENT)	L.S.	\$50,000.00	1	\$50,000.00
	UTILITY	L.S.	\$150,000.00	1	\$150,000.00
	PLANTING	L.S.	\$20,000.00	1	\$20,000.00
	QA/QC for HMA	L.S.	\$7,472.50	1	\$7,472.50
	Asphalt Cost Adj	L.S.	\$74,970.00	1	\$74,970.00
	CONSTRUCTION ENGINEERING - (INSPECTION, CE, ETC)	L.S.	\$4,256,446.96	1	\$4,256,446.96
	TOTAL CONSTRUCTION COST				\$25,097,374.25
	PROJECT DEVELOPMENT	L.S.	\$1,643,080.00	1	\$1,643,080.00
	PRELIMINARY ENGINEERING (DESIGN)	L.S.	\$2,464,620.00	1	\$2,464,620.00
	ROW COSTS	SF	\$2,424,430.00	1	\$2,500,000.00
	TOTAL BASE CONSTRUCTION COST				\$31,705,074.25